



PX-0282-NEG

V0


Prisman Wall fixture




Description

Wall fixture IP23 Prisman E27 ON-OFF Black

	Finish	Material
Structure	Black	Aluminium
Diffuser	Transparent	Polycarbonate



IP23 IK08  6

TECHNICAL CHARACTERISTICS

Light source

Lampholder: 1 x E27
Lamp maximum dimension: 100/60 mm
Quantity: 1
Recommended lamp: E27

GEAR

Voltage / Frequency:
100-240V/50-60Hz
Dimming protocol: ON-OFF

Luminaire

Drainage: Yes
Uv Protection: Yes
Warranty: 5 Years

Logistics

Energy Efficiency: NO BULB
EAN Code: 8435381456658
Net Weight (Kg): 0.68
Weight in Kg (packaged): 0.95
Packing: 200 x 180 x 210
Masterbox: 6

The photograph may not match the reference exactly. Please read the product description to identify the finish.

Luminaire

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27


Measur.

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27


Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90
Rectangular Luminaire Rectangular Luminous Area	Length Length	195 mm 85 mm	Width Width	170 mm 100 mm	Height Height	232 mm 120 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.008500 m2 0.010200 m2 0.012000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.010200 m2 0.012000 m2 0.011953 m2				
Coordinate system Date Measurement Distance	CG 20-12-2016 6.44	Symmetry Type Maximum Gamma Angle Measurement Flux	Sym. on planes 270-90 180 456.40 lm				
Operator Temperature Humidity Notes	Asselum T2 25.00 °C 52.00 % CG	Source voltage Source current Photocell	230.00 V Prc				

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
OSRAM 2006 IA,IB,IC		CLAS A CL 40		Name NITRA CLAS A CL 40W E27		420.00	40.00	1
C.I.E.	11 39 69 56 56			D DIN 5040		C11		
F UTE	--			B NBN		BZ 10		

195mm x 170mm



ULOR 24.78 %
DLOR 31.67 %
RN 43.90 %

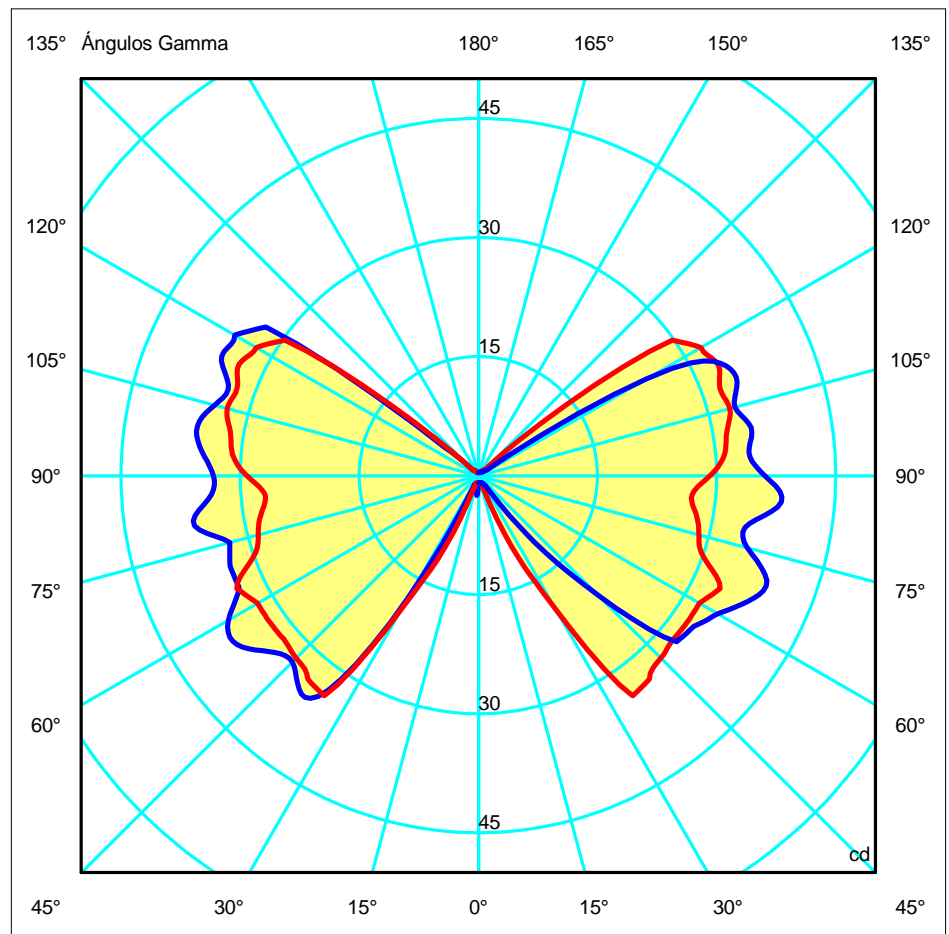

Luminaire

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27

Measur.

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

Luminous Intensity Table cd Table 1/1

	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
G 5.0	2.47	2.64	4.06	0.86	0.86	0.88	0.87	0.86	0.90	0.88	0.90	0.89	0.90
G 10.0	0.94	0.96	3.13	1.17	0.86	0.85	0.88	0.86	0.90	0.84	0.86	0.89	0.90
G 15.0	0.98	0.93	0.94	0.90	0.94	0.90	0.93	0.91	0.88	0.90	0.88	0.89	0.90
G 20.0	1.06	1.00	1.04	0.97	1.07	1.00	1.04	1.53	0.96	0.99	0.94	0.96	0.94
G 25.0	1.24	1.13	1.25	1.06	7.41	8.39	9.87	9.79	2.39	1.16	1.05	1.03	1.02
G 30.0	17.81	12.08	15.80	2.01	9.35	17.37	19.38	20.60	10.00	1.73	1.17	1.27	1.14
G 35.0	32.97	25.91	22.34	1.91	10.08	27.87	33.86	30.74	20.60	8.90	1.36	7.62	1.52
G 40.0	35.13	31.71	24.75	1.40	9.92	34.71	33.45	32.36	28.31	6.63	5.41	17.12	10.76
G 45.0	33.15	32.60	26.21	1.24	9.75	32.83	32.49	31.93	29.96	2.59	10.11	32.19	21.25
G 50.0	34.45	33.08	26.83	1.26	10.87	32.94	32.02	31.90	28.09	1.87	11.52	32.33	32.54
G 55.0	37.10	34.65	30.72	1.54	13.06	34.69	32.12	32.02	28.41	1.39	17.06	33.28	33.10
G 60.0	36.36	34.98	31.09	2.31	13.90	33.43	32.10	32.12	28.80	1.57	19.43	35.91	34.76
G 65.0	33.26	31.46	30.77	3.04	14.66	32.98	33.59	33.38	29.44	2.14	29.53	39.36	37.42
G 70.0	33.28	31.16	32.35	3.82	15.30	31.03	30.22	29.82	27.35	2.73	33.28	35.38	38.64
G 75.0	32.43	31.43	32.39	4.68	16.17	30.17	28.73	29.07	25.86	3.45	32.63	34.42	35.06
G 80.0	36.30	30.29	34.51	6.07	16.99	29.83	27.81	28.65	24.94	4.09	35.08	33.97	34.65
G 85.0	34.17	30.73	35.20	6.29	18.44	29.33	27.00	27.47	24.84	4.73	39.34	34.57	38.29
G 90.0	33.37	31.64	35.87	7.42	18.75	28.61	29.15	27.06	23.43	5.47	37.88	32.95	36.07
G 95.0	34.94	33.99	35.16	8.99	20.97	27.23	31.10	28.00	25.05	6.74	34.56	31.98	34.17
G100.0	35.94	36.81	37.47	9.50	23.65	28.10	31.74	30.83	28.03	9.72	33.68	33.72	34.87
G105.0	34.39	37.79	37.33	11.37	27.44	30.82	32.76	31.81	30.08	11.28	34.65	33.81	33.44
G110.0	33.50	36.25	35.31	12.20	29.13	31.44	32.33	31.96	29.95	12.69	34.73	36.03	34.65
G115.0	35.69	32.63	35.33	11.29	30.49	33.13	33.26	34.95	29.90	13.63	34.65	30.82	33.59
G120.0	35.44	34.03	31.69	7.39	20.63	31.78	32.32	34.63	28.57	12.18	31.28	3.91	24.43
G125.0	32.66	31.27	16.15	1.54	2.36	28.36	29.79	28.91	20.89	6.17	5.74	0.90	1.24
G130.0	5.54	17.73	1.11	1.12	1.00	4.74	10.18	1.65	1.74	1.08	0.97	0.74	0.89
G135.0	0.98	1.03	0.93	0.94	0.83	1.02	1.08	0.92	0.90	0.86	0.82	0.68	0.73
G140.0	0.82	0.85	0.78	0.86	0.72	0.90	0.93	0.76	0.78	0.75	0.68	0.58	0.59
G145.0	0.74	0.77	0.74	0.72	0.61	0.78	0.78	0.66	0.68	0.60	0.52	0.48	0.55
G150.0	0.63	0.68	0.62	0.57	0.51	0.59	0.60	0.54	0.56	0.50	0.46	0.44	0.43
G155.0	0.46	0.58	0.49	0.50	0.46	0.48	0.48	0.43	0.46	0.48	0.44	0.44	0.43
G160.0	0.43	0.46	0.46	0.46	0.43	0.43	0.43	0.43	0.43	0.44	0.46	0.44	0.43
G165.0	0.41	0.44	0.42	0.44	0.45	0.41	0.43	0.43	0.45	0.42	0.44	0.44	0.43
G170.0	0.43	0.43	0.42	0.44	0.43	0.41	0.43	0.43	0.44	0.44	0.44	0.43	0.43
G175.0	0.39	0.43	0.42	0.44	0.43	0.41	0.43	0.42	0.41	0.44	0.44	0.43	0.43
G180.0	0.43	0.41	0.43	0.44	0.43	0.43	0.43	0.43	0.43	0.44	0.43	0.41	0.43

Luminaire




Code PX-0282-NEG
 Name Applique PRISMAN 1x40W E27

Measur.

Code PX-0282-NEG
 Name Applique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

195mm x 170mm

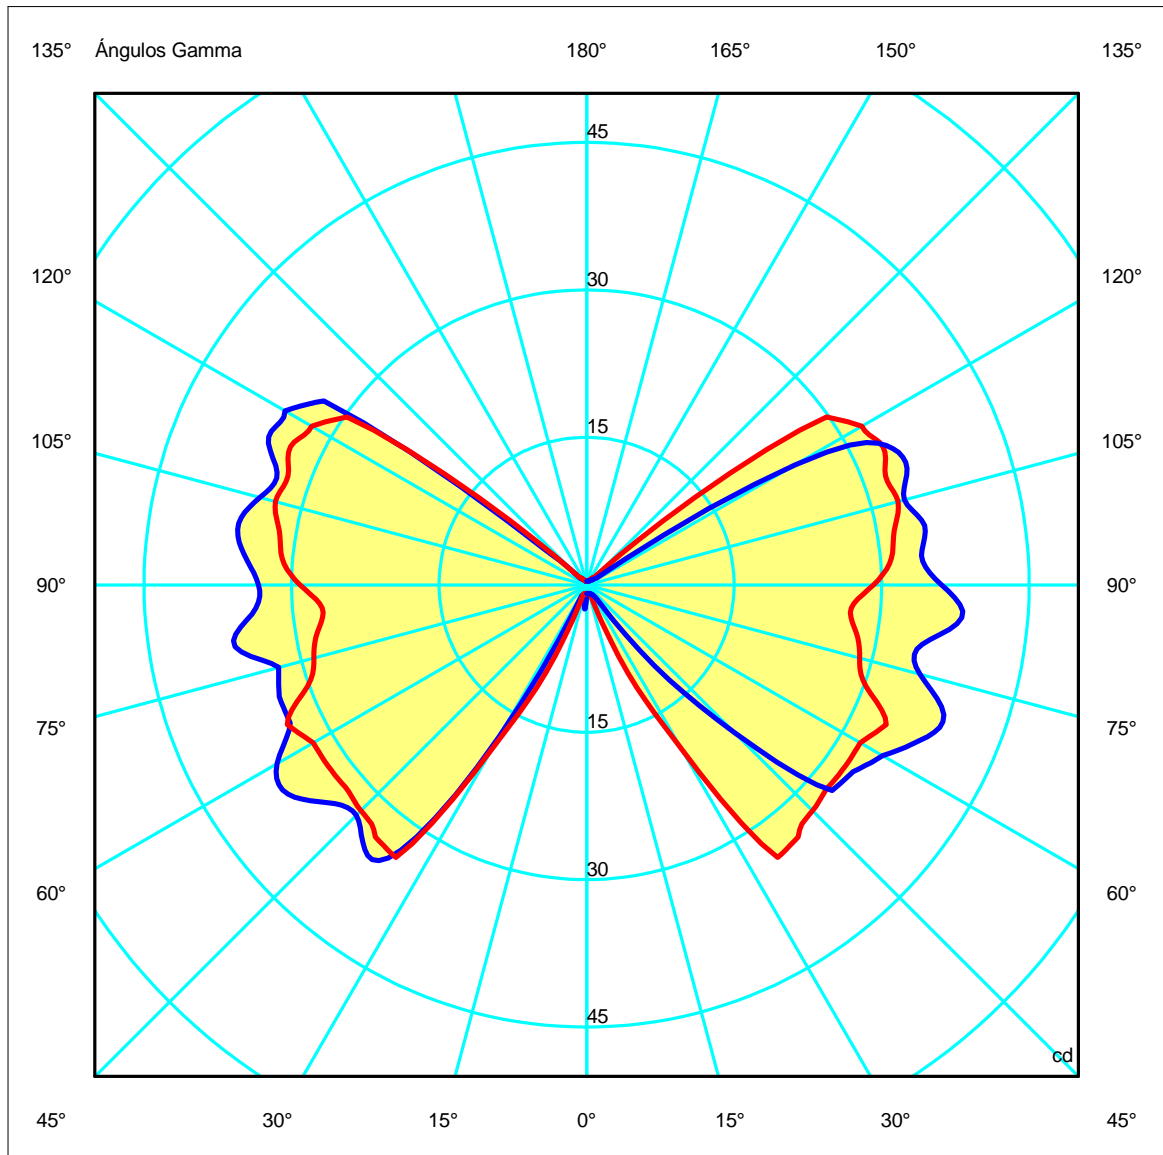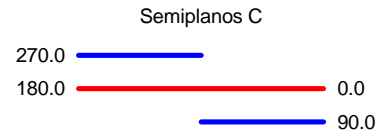

Luminaire



Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27

Measurem.

Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

195mm x 170mm

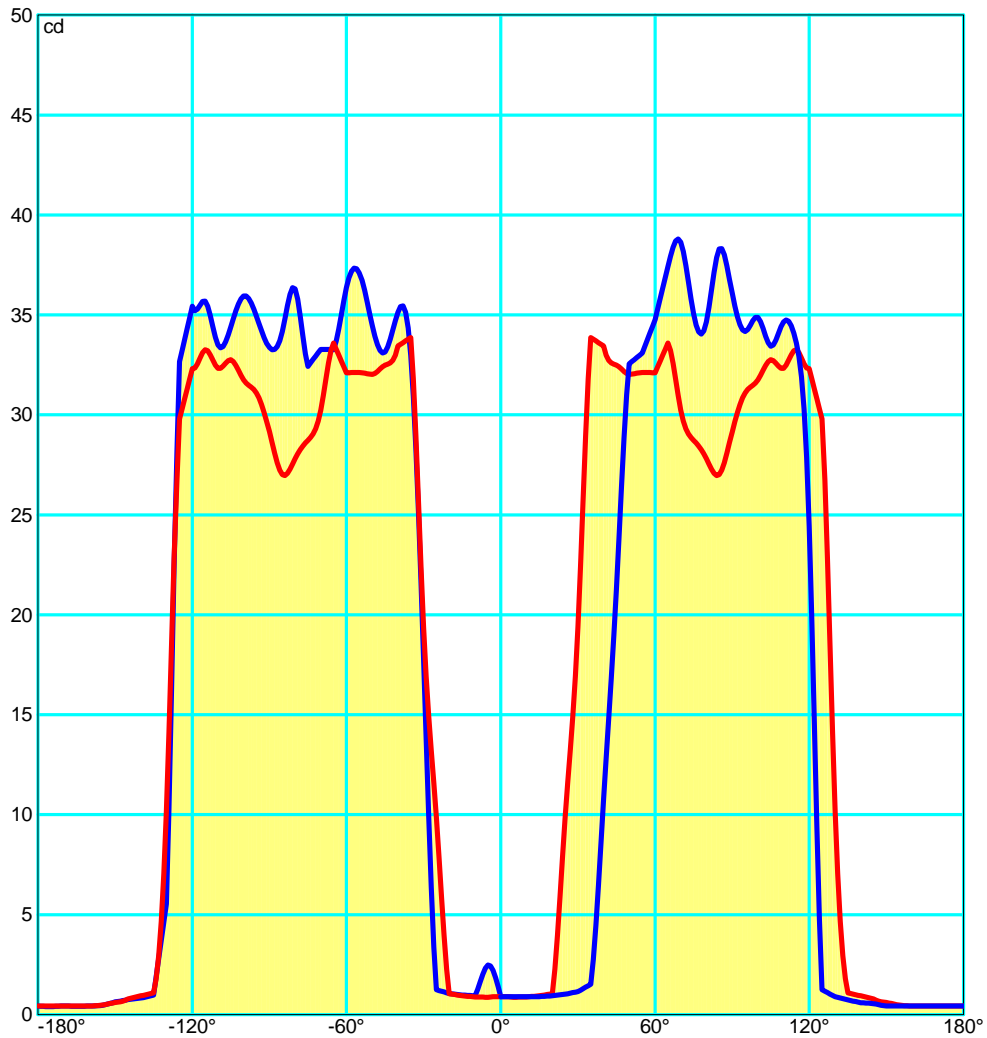

Luminaire

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27

Measurement

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	12.6	13.7	13.5	14.6	16.0	13.0	14.1	13.8	14.9	16.0
x=2H y=3H	15.5	16.5	16.3	17.4	18.6	15.6	16.6	16.4	17.5	18.6
x=2H y=4H	16.8	17.7	17.7	18.6	20.0	16.9	17.9	17.8	18.8	20.0
x=2H y=6H	18.1	19.0	19.0	19.9	21.3	18.4	19.2	19.2	20.2	21.3
x=2H y=8H	18.7	19.6	19.6	20.5	22.1	19.1	19.9	20.0	20.9	22.1
x=2H y=12H	19.4	20.2	20.2	21.1	22.7	19.8	20.6	20.7	21.6	22.7
x=4H y=2H	12.5	13.5	13.4	14.4	15.9	12.9	13.8	13.7	14.7	15.9
x=4H y=3H	15.7	16.5	16.5	17.4	19.0	16.1	16.9	16.9	17.8	19.0
x=4H y=4H	17.3	18.0	18.2	19.0	20.6	17.7	18.5	18.6	19.4	20.6
x=4H y=6H	19.0	19.6	19.9	20.6	22.2	19.3	20.0	20.3	21.0	22.2
x=4H y=8H	19.8	20.4	20.7	21.3	23.0	20.2	20.8	21.1	21.7	23.0
x=4H y=12H	20.5	21.1	21.5	22.1	23.8	21.0	21.5	21.9	22.5	23.8
x=8H y=4H	17.3	18.0	18.3	18.9	20.6	17.8	18.4	18.7	19.3	20.6
x=8H y=6H	19.2	19.7	20.2	20.7	22.6	19.8	20.3	20.7	21.3	22.6
x=8H y=8H	20.2	20.7	21.2	21.7	23.6	20.8	21.3	21.8	22.3	23.6
x=8H y=12H	21.3	21.7	22.3	22.7	24.6	21.9	22.3	22.8	23.3	24.6
x=12H y=4H	17.5	18.0	18.4	19.0	20.5	17.7	18.3	18.7	19.3	20.5
x=12H y=6H	19.3	19.7	20.2	20.7	22.5	19.8	20.3	20.7	21.2	22.5
x=12H y=8H	20.3	20.7	21.3	21.7	23.6	20.9	21.4	21.9	22.4	23.6

Luminaire

 Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27

Measurment

 Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG Sym. on planes 270-90	

Flujo Total=420.00 Flujo Luminaria=237.07

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.06	0.11	0.17	0.23	0.28	0.37	0.43	0.48	0.56	0.62	0.75	0.85
RC	-	-	-	-	-	-	-	-	-	-	-	10

Flujo Zonal por 1000 Lúmenes


Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	0	1	6	31	72	124	185	249	317	386	460	527	560	563	564	564	564	564

Códigos de Flujo C.I.E.

11 39 69 56 56

C.I.E.	-/-/-/-/-/-/-/-/10
D DIN 5040	C11
F UTE	--
B NBN	BZ 10
RN	43.90133 %
BLF	1.0

LOR	56.44533 %
ULOR	24.78025 %
DLOR	31.66508 %
UFF	43.90133 %
DFF	56.09867 %
FFR	78.25735 %

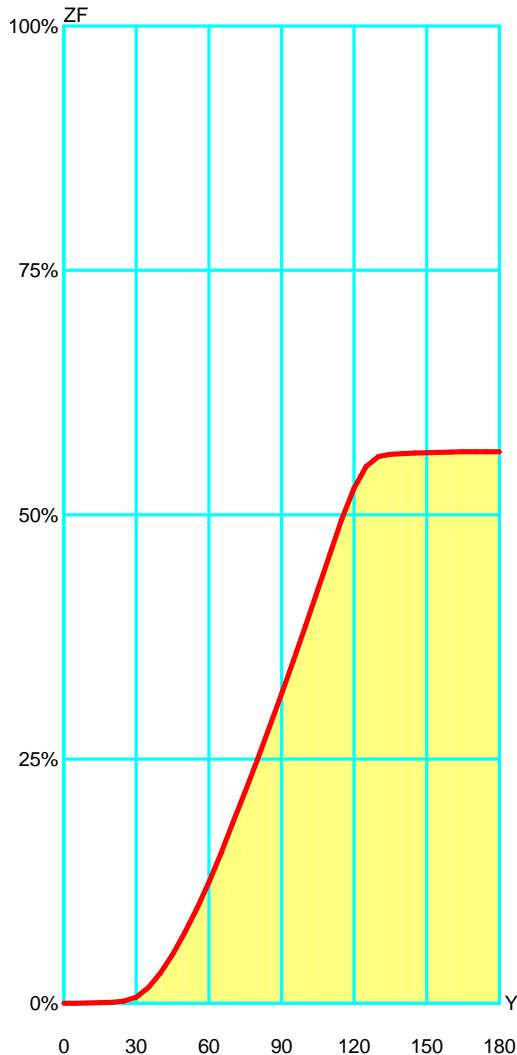

Gamma °	Flujo Zonal			
	Flujo	Suma lm	Flujo [%]	Suma [%]
0°	0.00	0.00	0.00%	0.00 %
5°	0.06	0.06	0.01 %	0.01 %
10°	0.21	0.27	0.04 %	0.05 %
15°	0.28	0.56	0.05 %	0.10 %
20°	0.38	0.94	0.07 %	0.17 %
25°	1.21	2.15	0.21 %	0.38 %
30°	4.17	6.31	0.74 %	1.12 %
35°	9.60	15.92	1.70 %	2.82 %
40°	15.13	31.05	2.68 %	5.50 %
45°	19.02	50.07	3.37 %	8.87 %
50°	21.86	71.94	3.87 %	12.74 %
55°	24.60	96.54	4.36 %	17.10 %
60°	27.30	123.84	4.84 %	21.94 %
65°	29.76	153.59	5.27 %	27.21 %
70°	31.35	184.95	5.55 %	32.77 %
75°	31.70	216.64	5.62 %	38.38 %
80°	32.41	249.05	5.74 %	44.12 %
85°	33.53	282.58	5.94 %	50.06 %
90°	34.07	316.65	6.04 %	56.10 %
95°	34.30	350.95	6.08 %	62.17 %
100°	35.42	386.37	6.28 %	68.45 %
105°	36.72	423.09	6.51 %	74.96 %
110°	36.78	459.87	6.52 %	81.47 %
115°	35.71	495.58	6.33 %	87.80 %
120°	31.50	527.08	5.58 %	93.38 %
125°	22.35	549.43	3.96 %	97.34 %
130°	10.11	559.54	1.79 %	99.13 %
135°	2.25	561.79	0.40 %	99.53 %
140°	0.74	562.53	0.13 %	99.66 %
145°	0.57	563.10	0.10 %	99.76 %
150°	0.43	563.53	0.08 %	99.84 %
155°	0.31	563.83	0.05 %	99.89 %
160°	0.23	564.06	0.04 %	99.93 %
165°	0.17	564.23	0.03 %	99.96 %
170°	0.12	564.36	0.02 %	99.98 %
175°	0.07	564.43	0.01 %	100.00 %
180°	0.02	564.45	0.00 %	100.00 %

Luminaire

Code PX-0282-NEG
Name Applique PRISMAN 1x40W E27

Measur.

Code PX-0282-NEG
Name Applique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG Sym. on planes 270-90	

Utilizations CIE

Mounting	Direct	Normalization										Normalised			Suspension Ratio/3						Standard CIE Settings			
Ceiling																								
K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000	
0.60	299	268	282	255	255	243	217	184	210	179	188	142	172	117	168	152	134	140	112	127	118	102	93	
0.80	332	305	306	282	290	270	246	216	234	206	209	166	190	139	193	174	157	160	132	149	138	121	110	
1.00	355	330	320	299	314	287	269	240	251	225	224	184	203	156	211	191	175	174	149	166	153	136	124	
1.25	375	353	329	312	336	300	290	263	264	242	237	201	215	172	227	206	191	189	165	182	168	152	138	
1.50	389	370	334	320	352	308	306	281	273	253	246	214	224	185	239	217	204	199	177	195	180	164	149	
2.00	407	391	338	327	373	316	329	308	285	269	259	232	237	204	255	234	222	216	196	213	198	182	165	
2.50	418	404	338	329	386	319	345	327	291	278	267	245	246	217	264	244	234	227	210	225	210	196	177	
3.00	425	413	338	330	395	321	357	341	295	284	273	253	253	228	271	252	243	235	220	234	220	206	186	
4.00	434	425	335	330	406	321	373	360	300	291	280	264	262	242	279	262	255	247	234	246	233	220	198	
5.00	439	432	333	328	413	321	384	373	302	295	284	272	268	251	284	268	263	254	244	254	242	230	207	
10.00	448	444	324	322	426	316	407	401	305	301	293	286	282	273	292	282	278	272	266	271	262	253	225	
20.00	451	449	317	316	432	311	420	417	304	302	297	294	291	286	295	288	287	282	279	280	274	267	236	

Wall

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	257	240	236	222	231	214	182	167	173	160	145	127	125	106	153	130	123	113	103	119	104	98	90
0.80	304	288	274	261	275	251	224	208	209	195	180	160	157	136	185	161	153	142	131	147	131	123	112
1.00	342	326	303	291	310	279	259	242	239	225	208	188	185	162	211	187	179	167	156	171	154	144	132
1.25	379	364	331	320	345	307	295	278	268	255	238	218	214	191	239	214	207	194	182	196	179	167	153
1.50	408	394	353	343	374	329	325	308	292	280	263	244	239	216	261	237	230	218	206	217	201	187	171
2.00	453	440	386	378	417	362	371	356	329	318	301	284	278	257	296	274	267	255	243	251	235	218	201
2.50	486	475	410	403	449	387	407	393	357	347	331	315	309	289	323	302	296	284	273	278	262	244	225
3.00	512	502	430	424	475	407	436	423	379	371	355	341	334	316	345	326	320	308	298	300	285	265	245
4.00	552	544	461	456	515	438	480	470	415	408	394	382	375	359	380	363	358	347	338	335	322	300	278
5.00	583	576	485	481	545	463	515	505	443	437	424	413	406	392	408	392	388	377	370	364	351	328	304
10.00	674	671	562	560	637	542	616	611	528	525	515	509	503	494	493	482	479	472	467	451	443	415	388
20.00	761	759	639	638	723	620	711	707	612	610	603	600	595	590	576	569	568	563	560	537	532	502	473

Working Pl.

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	212	195	198	183	184	173	124	109	120	105	84	66	58	39	96	66	60	44	35	54	35	28	18
0.80	267	248	246	230	232	216	169	151	161	144	121	99	92	68	130	97	89	72	61	80	59	48	36
1.00	310	291	283	267	271	250	206	187	195	178	154	129	122	95	158	125	116	98	85	103	81	67	52
1.25	354	335	319	304	310	284	246	226	230	213	189	163	156	126	188	155	145	128	112	128	105	87	71
1.50	388	370	346	333	341	310	279	258	259	242	218	192	185	154	213	180	170	152	136	150	127	105	88
2.00	438	422	386	374	388	349	330	310	302	286	263	238	231	200	251	220	210	193	177	184	162	135	116
2.50	473	459	413	403	421	375	367	348	333	319	297	273	265	236	278	249	240	224	208	209	188	158	137
3.00	498	486	432	423	445	394	395	378	355	343	322	300	292	265	299	272	263	248	233	229	209	176	153
4.00	533	523	457	450	478	420	435	420	387	377	357	339	331	307	328	304	297	282	269	257	240	202	178
5.00	556	547	474	468	500	437	462	449	408	399	382	366	357	336	348	326	320	307	295	277	261	220	195
10.00	608	603	511	508	551	475	526	519	457	452	440	430	423	410	394	380	376	367	360	325	314	266	239
20.00	638	636	532	530	581	498	566	562	487	484	476	471	466	459	423	415	413	406	402	357	350	297	269

LM53 SHR C0-C180: 7.733 SHR C90-C270: 8.173 SHR Square: 0.480

Luminaire

Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27


Measur.

Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

Isolux (Floor)


Luminaire position X=0.00m Y=0.00m Z=1.80m

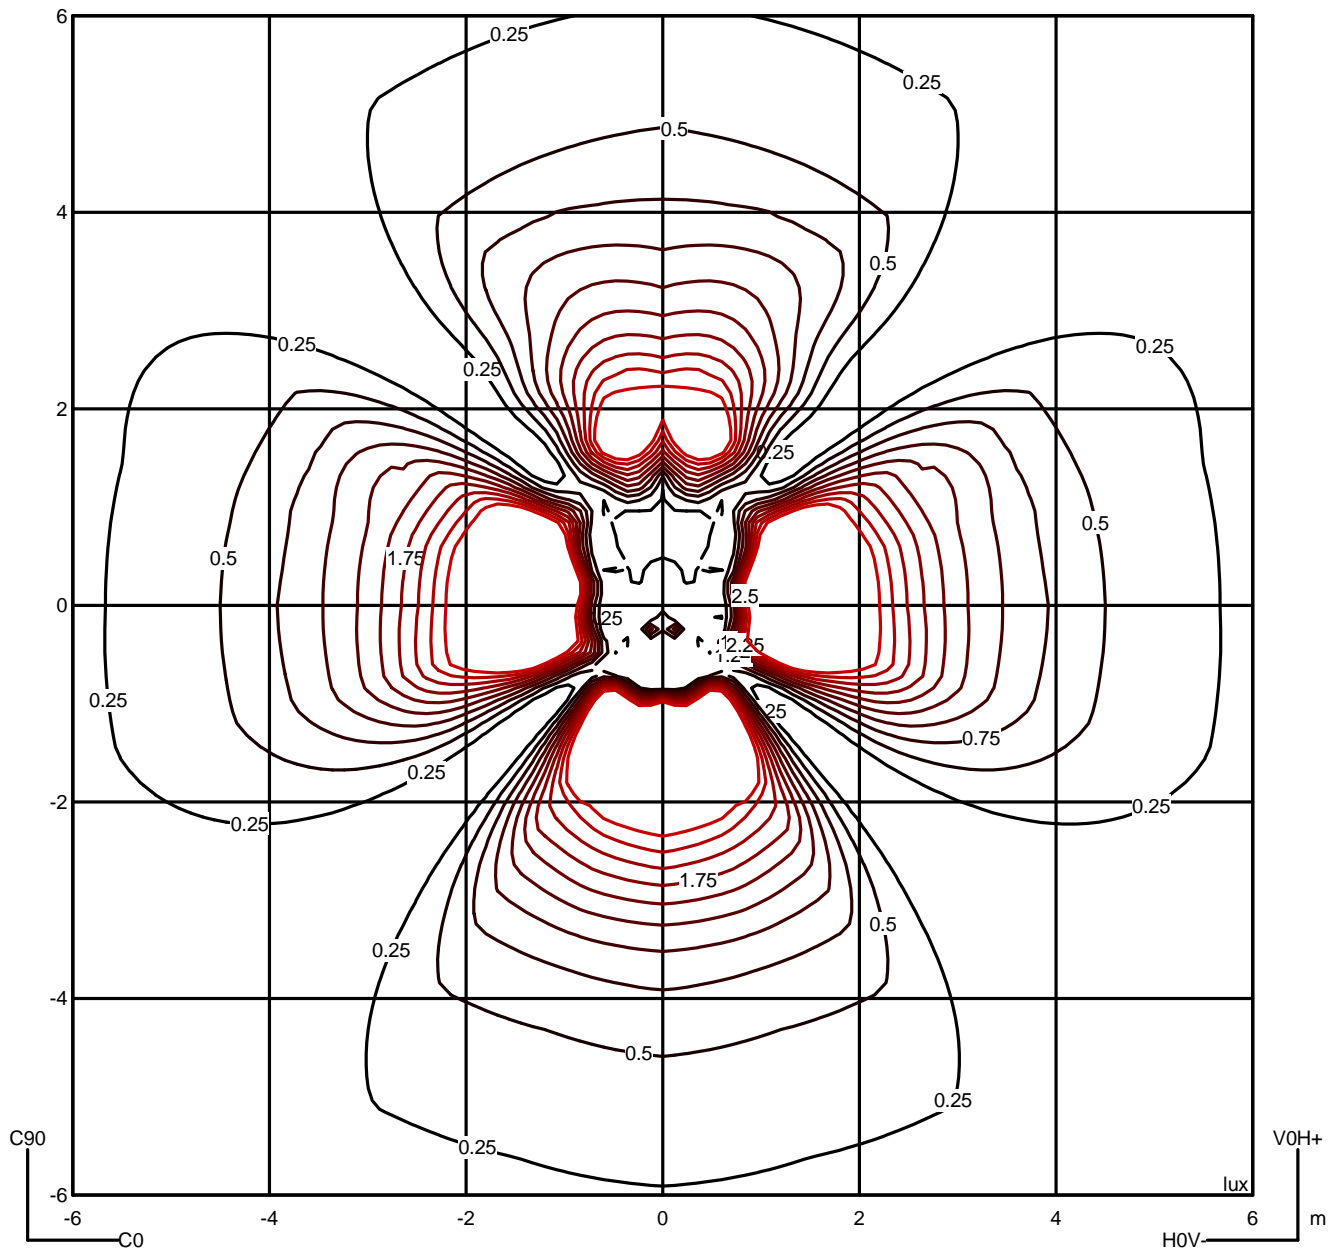

Luminaire
 Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27
Measur.
 Code PX-0282-NEG
 Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

Luminance

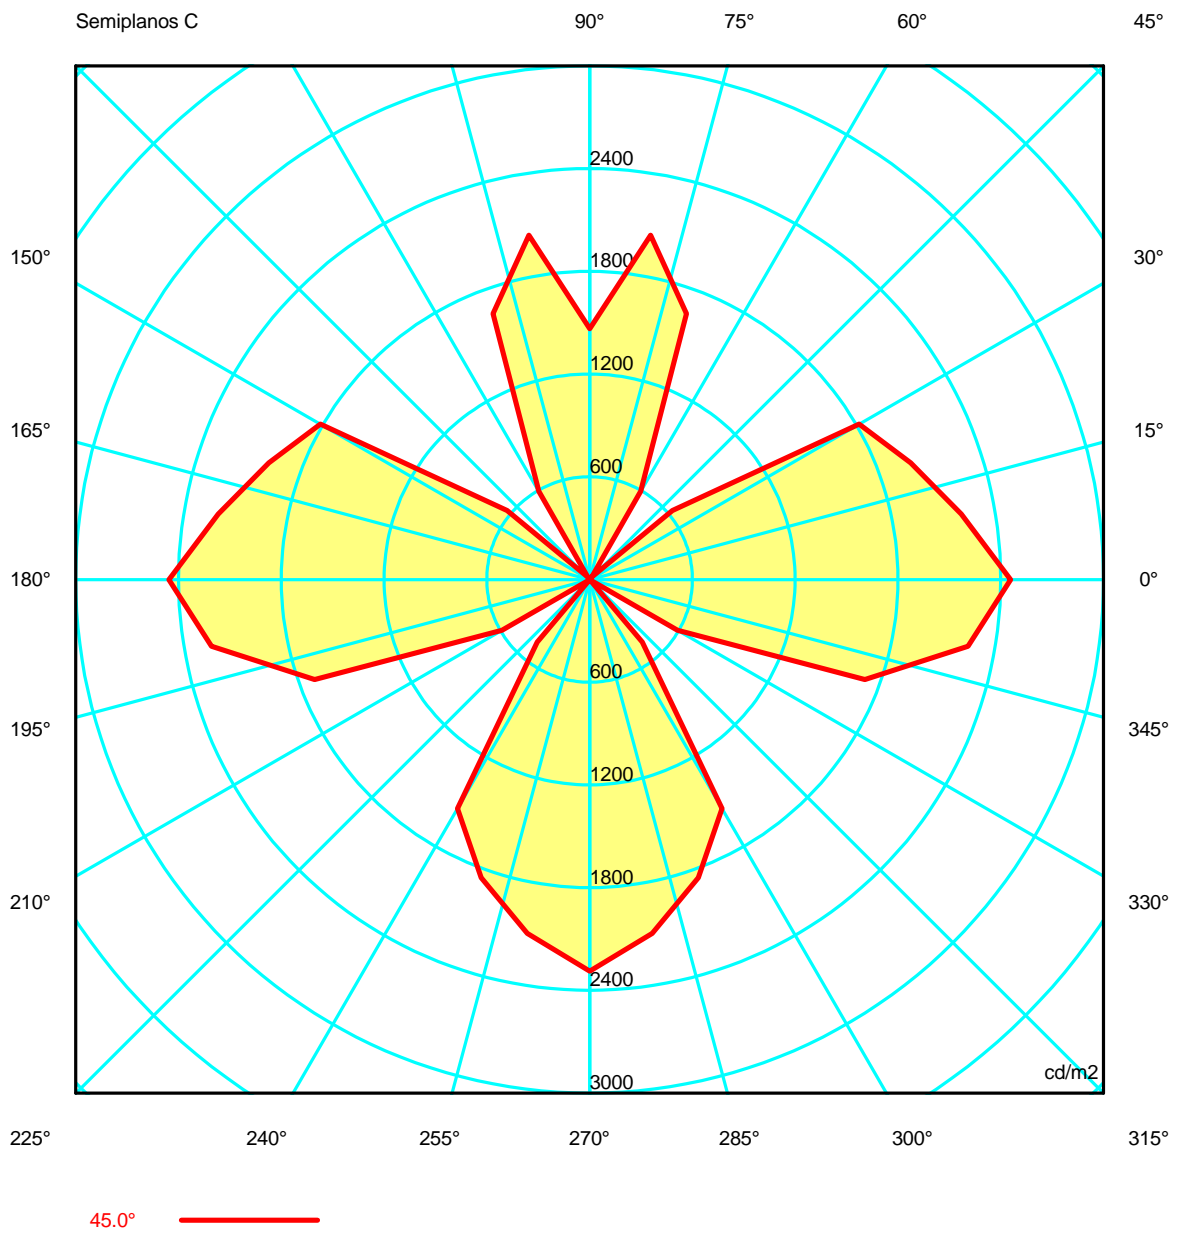

Luminaire

Code PX-0282-NEG
Name Applique PRISMAN 1x40W E27

Measur.

Code PX-0282-NEG
Name Applique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 1/3

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82
G 5.0	92.54	90.43	90.31	92.15	90.21	89.69	91.61	91.76	92.29	94.54	92.29	91.76	91.61
G 10.0	86.75	82.50	81.29	82.30	77.72	75.21	77.70	80.64	83.27	86.03	83.27	80.64	77.70
G 15.0	85.97	81.09	75.86	73.02	73.03	72.72	71.93	73.39	76.17	79.48	76.17	73.39	71.93
G 20.0	90.73	119.11	110.47	73.36	73.51	72.75	71.08	73.49	76.35	77.62	76.35	73.49	71.08
G 25.0	821.21	833.09	560.21	171.22	110.12	78.18	73.50	74.12	76.10	79.59	76.10	74.12	73.50
G 30.0	1555.44	1577.13	1270.59	676.63	234.00	101.15	77.31	83.69	86.26	85.61	86.26	83.69	77.31
G 35.0	2642.73	2347.38	1883.45	1331.72	809.04	317.66	85.80	372.87	484.46	109.75	484.46	372.87	85.80
G 40.0	2559.69	2286.95	2025.24	1764.27	815.90	189.15	328.32	891.16	1112.63	756.23	1112.63	891.16	328.32
G 45.0	2457.20	2201.63	1992.97	1815.63	629.14	18.40	595.81	1653.63	2043.24	1466.01	2043.24	1653.63	595.81
G 50.0	2411.38	2164.59	1920.36	1669.48	527.30	38.61	664.86	1609.63	2041.40	2220.54	2041.40	1609.63	664.86
G 55.0	2427.81	2164.06	1915.34	1668.87	463.61	127.37	971.23	1761.01	2156.49	2250.70	2156.49	1761.01	971.23
G 60.0	2453.86	2176.89	2078.85	1684.61	463.98	170.82	1100.02	1917.78	2301.94	2374.11	2301.94	1917.78	1100.02
G 65.0	2616.47	2240.99	2004.46	1728.36	429.21	391.98	1674.79	2296.61	2450.81	2586.69	2450.81	2296.61	1674.79
G 70.0	2419.48	2093.92	1838.51	1623.57	392.89	532.32	1905.72	2066.59	2326.16	2724.29	2326.16	2066.59	1905.72
G 75.0	2383.76	2080.83	1971.40	1564.92	407.11	572.74	1901.21	2054.53	2259.53	2542.03	2259.53	2054.53	1901.21
G 80.0	2414.03	2113.84	1994.01	1550.41	408.06	680.36	2096.24	2143.92	2301.46	2606.47	2301.46	2143.92	2096.24
G 85.0	2476.86	2129.95	2014.78	1600.84	421.88	830.67	2432.02	2340.57	2346.52	3016.40	2346.52	2340.57	2432.02
G 90.0	2858.21	2247.71	1888.24	1579.63	460.09	885.65	2444.86	2342.86	2341.08	3005.73	2341.08	2342.86	2444.86

Luminaire

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27

Measur.

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27

Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82
G 5.0	89.69	90.21	92.15	90.31	90.43	92.54	91.66	90.18	88.14	87.65	196.95	413.45	341.75
G 10.0	75.21	77.72	82.30	81.29	82.50	86.75	82.12	79.45	78.59	96.48	176.29	283.25	162.77
G 15.0	72.72	73.03	73.02	75.86	81.09	85.97	79.93	77.59	77.76	74.36	73.90	76.88	77.40
G 20.0	72.75	73.51	73.36	110.47	119.11	90.73	78.56	82.21	81.94	75.10	73.77	78.26	78.13
G 25.0	78.18	110.12	171.22	560.21	833.09	821.21	673.09	597.88	530.14	205.40	78.32	87.61	84.08
G 30.0	101.15	234.00	676.63	1270.59	1577.13	1555.44	1360.61	1099.67	632.77	138.57	394.18	1045.54	944.72
G 35.0	317.66	809.04	1331.72	1883.45	2347.38	2642.73	2247.83	1533.76	651.29	71.67	474.94	1409.61	1673.68
G 40.0	189.15	815.90	1764.27	2025.24	2286.95	2559.69	2396.80	1844.86	618.02	0.00	475.30	1502.57	1938.66
G 45.0	18.40	629.14	1815.63	1992.97	2201.63	2457.20	2242.96	1708.43	590.90	0.00	477.06	1544.98	1852.39
G 50.0	38.61	527.30	1669.48	1920.36	2164.59	2411.38	2211.80	1718.56	646.28	2.63	471.64	1548.13	1847.82
G 55.0	127.37	463.61	1668.87	1915.34	2164.06	2427.81	2284.46	1844.81	767.21	26.25	541.83	1748.85	1964.49
G 60.0	170.82	463.98	1684.61	2078.85	2176.89	2453.86	2236.03	1796.34	813.30	83.19	569.45	1759.97	1976.96
G 65.0	391.98	429.21	1728.36	2004.46	2240.99	2616.47	2274.98	1789.38	860.40	133.56	603.15	1744.80	1839.76
G 70.0	532.32	392.89	1623.57	1838.51	2093.92	2419.48	2150.49	1751.67	908.03	178.10	671.42	1852.17	1880.26
G 75.0	572.74	407.11	1564.92	1971.40	2080.83	2383.76	2133.74	1775.33	978.30	243.41	713.39	1887.05	1928.62
G 80.0	680.36	408.06	1550.41	1994.01	2113.84	2414.03	2172.67	1836.74	1056.52	314.41	845.85	2062.58	1979.09
G 85.0	830.67	421.88	1600.84	2014.78	2129.95	2476.86	2226.68	1924.77	1188.04	367.94	884.40	2176.60	2085.70
G 90.0	885.65	460.09	1579.63	1888.24	2247.71	2858.21	2432.15	1960.38	1264.00	453.95	984.65	2315.47	2238.53

Luminaire

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27


Measur.

Code PX-0282-NEG
Name Aplique PRISMAN 1x40W E27


Luminaire Flux	237.07 lm	Luminaire Power	40.00 W	Efficacy	5.93 lm/W	Efficiency	56.45%
Lamps Flux	420.00 lm	Maximum value	39.36 cd	Position	C=75.00 G=65.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 3/3

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82	105.82
G 5.0	267.63	260.08	267.63	341.75	413.45	196.95	87.65	88.14	90.18	91.66
G 10.0	88.53	89.77	88.53	162.77	283.25	176.29	96.48	78.59	79.45	82.12
G 15.0	79.80	86.39	79.80	77.40	76.88	73.90	74.36	77.76	77.59	79.93
G 20.0	79.87	87.32	79.87	78.13	78.26	73.77	75.10	81.94	82.21	78.56
G 25.0	80.50	96.93	80.50	84.08	87.61	78.32	205.40	530.14	597.88	673.09
G 30.0	878.92	1332.60	878.92	944.72	1045.54	394.18	138.57	632.77	1099.67	1360.61
G 35.0	1848.87	2381.21	1848.87	1673.68	1409.61	474.94	71.67	651.29	1533.76	2247.83
G 40.0	2136.96	2469.67	2136.96	1938.66	1502.57	475.30	0.00	618.02	1844.86	2396.80
G 45.0	2099.05	2286.71	2099.05	1852.39	1544.98	477.06	0.00	590.90	1708.43	2242.96
G 50.0	2097.19	2350.46	2097.19	1847.82	1548.13	471.64	2.63	646.28	1718.56	2211.80
G 55.0	2215.66	2523.19	2215.66	1964.49	1748.85	541.83	26.25	767.21	1844.81	2284.46
G 60.0	2212.24	2483.15	2212.24	1976.96	1759.97	569.45	83.19	813.30	1796.34	2236.03
G 65.0	2015.30	2298.95	2015.30	1839.76	1744.80	603.15	133.56	860.40	1789.38	2274.98
G 70.0	2032.55	2346.19	2032.55	1880.26	1852.17	671.42	178.10	908.03	1751.67	2150.49
G 75.0	2072.39	2351.38	2072.39	1928.62	1887.05	713.39	243.41	978.30	1775.33	2133.74
G 80.0	2028.56	2730.79	2028.56	1979.09	2062.58	845.85	314.41	1056.52	1836.74	2172.67
G 85.0	2095.41	2691.89	2095.41	2085.70	2176.60	884.40	367.94	1188.04	1924.77	2226.68
G 90.0	2242.65	2780.82	2242.65	2238.53	2315.47	984.65	453.95	1264.00	1960.38	2432.15

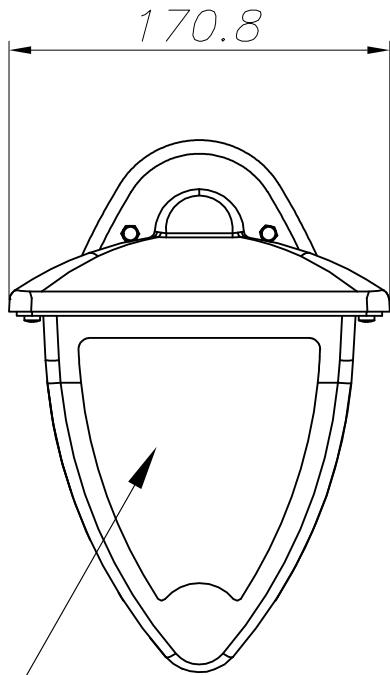

PC transparent diffuser

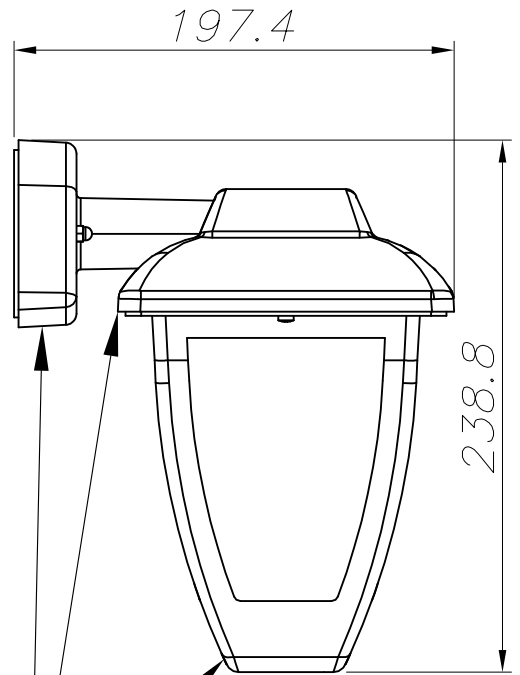

Aluminum / Black

