

CARACTERÍSTICAS TÉCNICAS

IP44 IK05



Potencia total luminaria : 6.6W

Lúmenes reales : 420

Lúmenes nominales : 500

Lm / W reales : 64

Material de la estructura : Acero inoxidable AISI 202

Acabado estructura : acero inoxidable

Material del difusor : Policarbonato

Acabado difusor : Opal

Voltaje / Frecuencia : 100-240V ~ 50/60Hz


Protocolo de regulación : ON-OFF

Power Factor : 0.50

Vida útil : 36.000h L70B30

Garantía : 3 Años

Luminaria fácilmente reciclable




CARACTERÍSTICAS LUMINOTÉCNICAS

CRI: 80

MacAdam steps: 3

Riesgo fotobiológico: RG0

Portalámparas	Cantidad	Potencia fuente de luz (W)	Temperatura de color correlacionada (CCT)
LED	1	5.3W	4000K



LOGÍSTICA

Peso neto (Kg): 0.74

Peso embalado (Kg): 0.84

Embalaje: 110mm x 60mm x 255mm



10 Un



Luminaire

Code PX-0278-INO
Name Aplique LITUS LED 6W 4000K


Measurum.

Code CL116A17F007G
Name Aplique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical
Rectangular Luminaire		Length	244 mm	Width	50 mm	Height	95 mm
Rectangular Luminous Area		Length	140 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.007000 m2		Emitting area on Plane 180°		0.007000 m2	
Emitting area on Plane 0°		0.007000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.008486 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		12-01-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		419.58 lm	
Operator		Asselum T2		Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		PX-0278-INO		Name PX-0278-INO		419.58	6.97	1
C.I.E.	33 61 84 71 100			D DIN 5040		B21		
F UTE	0.71 H + 0.29 T			B NBN		BZ 6		

244mm x 50mm




C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 28.64 %

DLOR 71.36 %

RN 28.64 %

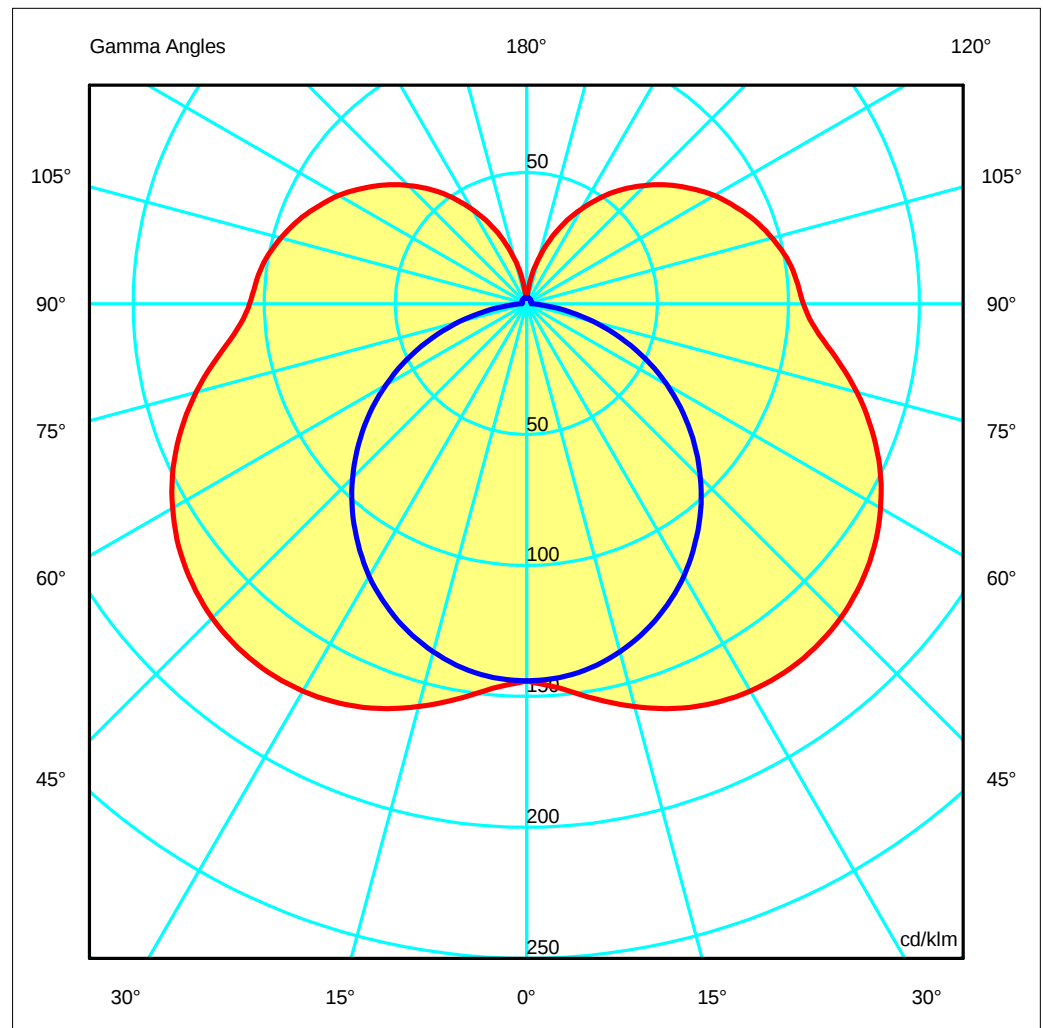

Luminaire

Code PX-0278-INO
Name Applique LITUS LED 6W 4000K

Measurment

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	144.08	144.08	144.08	144.08	144.08	144.08	144.08
G 5.0	147.45	146.83	146.39	145.48	144.61	143.74	143.31
G 10.0	153.36	152.29	150.78	148.05	145.24	142.51	141.18
G 15.0	159.25	158.02	155.31	150.67	145.35	140.34	137.59
G 20.0	164.49	162.67	158.75	152.42	144.75	137.05	132.88
G 25.0	168.39	166.17	161.25	153.00	143.13	132.77	126.96
G 30.0	170.77	168.28	162.29	152.49	140.29	127.52	120.11
G 35.0	171.80	168.97	162.02	150.71	136.44	121.38	112.01
G 40.0	171.37	168.19	160.40	147.77	131.72	114.22	103.35
G 45.0	169.60	166.15	157.31	143.55	125.78	106.33	93.82
G 50.0	166.41	162.65	153.20	138.05	119.08	97.70	83.73
G 55.0	161.95	157.88	147.43	131.46	111.23	88.40	73.00
G 60.0	155.96	151.47	140.84	123.91	102.44	78.25	61.83
G 65.0	148.80	144.23	132.53	115.14	92.22	67.60	50.20
G 70.0	140.10	135.12	123.67	104.98	82.31	56.35	38.26
G 75.0	130.48	125.56	113.04	94.87	71.37	44.97	26.34
G 80.0	120.00	115.04	103.25	84.27	60.86	34.01	15.14
G 85.0	110.68	106.26	93.75	75.48	51.50	24.91	5.82
G 90.0	105.65	101.10	89.22	70.69	47.28	20.60	1.72
G 95.0	103.36	99.19	87.43	69.39	46.38	20.08	1.74
G100.0	100.76	96.38	85.22	67.53	45.24	19.63	1.93
G105.0	96.97	93.10	82.17	65.36	43.65	18.89	1.85
G110.0	92.74	88.86	78.83	62.58	41.88	17.96	1.83
G115.0	87.76	84.46	74.62	59.49	39.66	16.97	1.87
G120.0	82.66	79.15	70.30	55.78	37.18	15.83	1.93
G125.0	76.61	73.79	65.30	51.87	34.25	14.54	1.98
G130.0	70.52	67.58	60.18	47.47	31.36	13.14	2.03
G135.0	63.74	61.59	54.31	43.05	28.00	11.71	2.14
G140.0	56.94	54.51	48.38	37.84	24.72	10.28	2.14
G145.0	49.45	47.76	41.82	32.82	21.05	8.84	2.19
G150.0	41.57	40.08	35.40	27.32	17.60	7.43	2.24
G155.0	33.80	32.72	28.27	22.13	13.92	6.05	2.29
G160.0	25.74	24.62	21.58	16.37	10.52	4.74	2.32
G165.0	17.66	17.22	14.59	11.38	7.22	3.81	2.34
G170.0	10.09	9.81	8.65	6.56	4.55	2.98	2.34
G175.0	2.07	3.81	2.56	2.87	2.41	2.33	2.24
G180.0	2.06	2.06	2.06	2.06	2.06	2.06	2.06

Luminaire

Code PX-0278-INO
Name Applique LITUS LED 6W 4000K


Measur.

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K


Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

244mm x 50mm

C Halfplanes



180.0 — 0.0
270.0 — 90.0

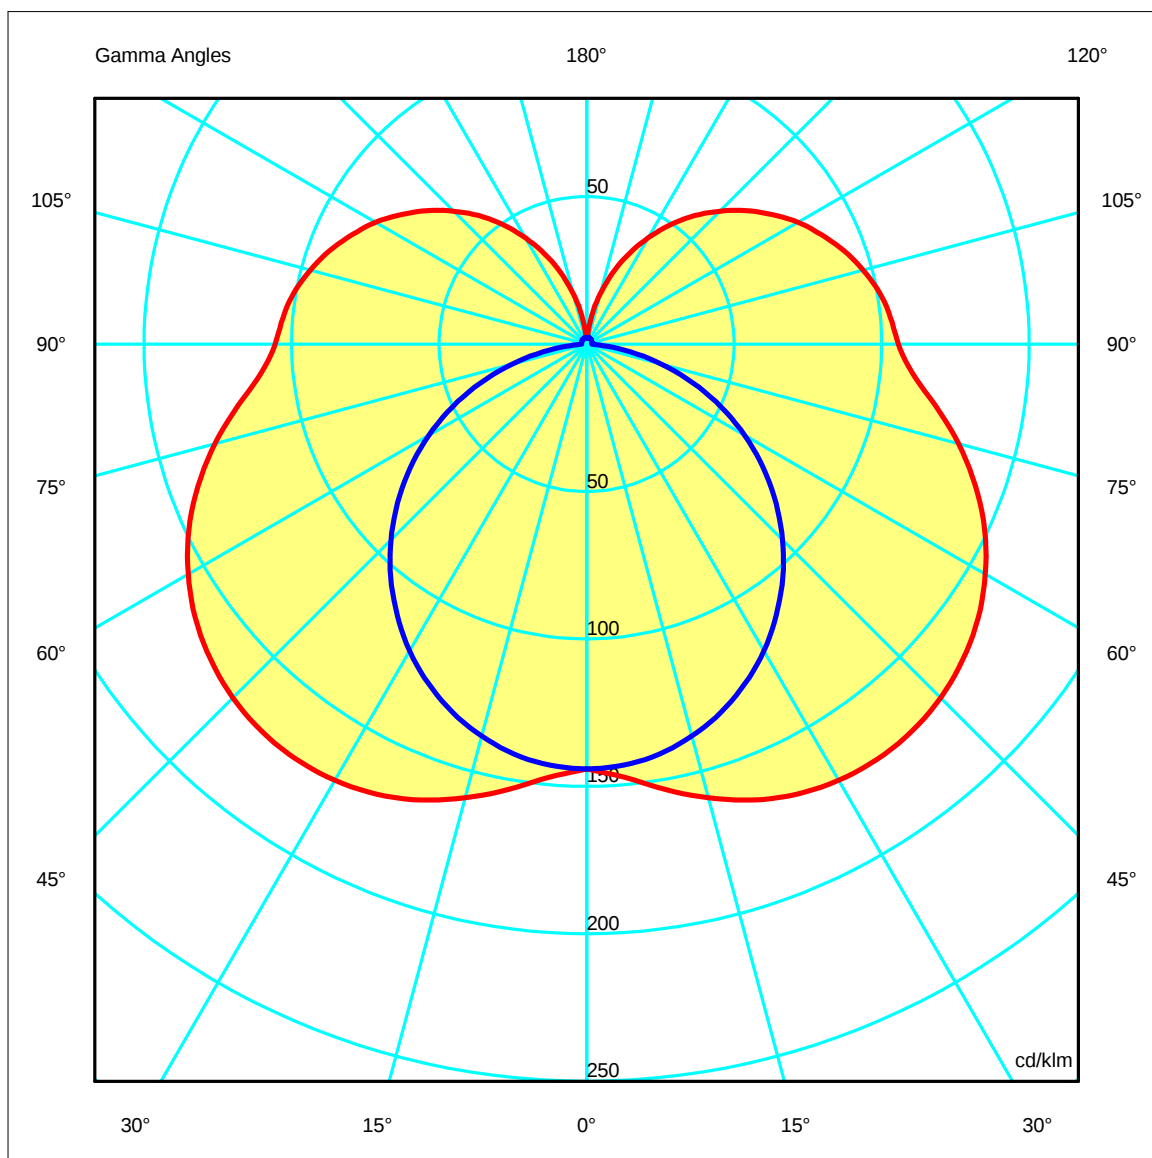

Luminaire

Code PX-0278-INO
Name Applique LITUS LED 6W 4000K

Measurem.

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

Right beam angle not found, gamma = 36

Right beam angle not found, gamma = 36

Right beam angle not found, gamma = 36

Luminaire

Code PX-0278-INO
Name Aplique LITUS LED 6W 4000K

Measurment

Code CL116A17F007G
Name Aplique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	17.9	19.0	18.6	19.7	17.9	15.3	16.4	16.0	17.1	17.9
x=2H y=3H	20.2	21.2	20.9	22.0	19.2	16.6	17.6	17.3	18.3	19.2
x=2H y=4H	21.4	22.3	22.1	23.0	19.6	17.1	18.0	17.8	18.7	19.6
x=2H y=6H	22.4	23.4	23.2	24.1	19.8	17.3	18.2	18.0	19.0	19.8
x=2H y=8H	23.0	23.9	23.7	24.6	19.9	17.4	18.2	18.1	19.0	19.9
x=2H y=12H	23.5	24.3	24.2	25.1	19.9	17.4	18.2	18.1	19.0	19.9
x=4H y=2H	18.5	19.4	19.2	20.1	19.2	16.6	17.6	17.4	18.3	19.2
x=4H y=3H	21.0	21.8	21.7	22.6	20.7	18.2	19.0	18.9	19.8	20.7
x=4H y=4H	22.3	23.0	23.1	23.8	21.3	18.8	19.6	19.6	20.3	21.3
x=4H y=6H	23.6	24.2	24.4	25.0	21.6	19.2	19.9	20.0	20.7	21.6
x=4H y=8H	24.2	24.8	25.0	25.6	21.7	19.3	19.9	20.1	20.7	21.7
x=4H y=12H	24.8	25.4	25.6	26.2	21.7	19.4	19.9	20.2	20.7	21.7
x=8H y=4H	22.6	23.2	23.4	24.0	22.2	19.8	20.4	20.6	21.2	22.2
x=8H y=6H	24.1	24.6	24.9	25.4	22.8	20.5	21.0	21.3	21.8	22.8
x=8H y=8H	24.9	25.3	25.7	26.2	23.1	20.7	21.2	21.6	22.0	23.1
x=8H y=12H	25.7	26.1	26.5	26.9	23.2	20.9	21.3	21.7	22.1	23.2
x=12H y=4H	22.6	23.1	23.4	23.9	22.4	20.0	20.5	20.8	21.4	22.4
x=12H y=6H	24.1	24.6	25.0	25.4	23.2	20.9	21.3	21.7	22.2	23.2
x=12H y=8H	25.0	25.4	25.8	26.3	23.5	21.2	21.6	22.1	22.5	23.5

Luminaire


Code PX-0278-INO
Name Applique LITUS LED 6W 4000K

Measurem.

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K


Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

244mm x 50mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

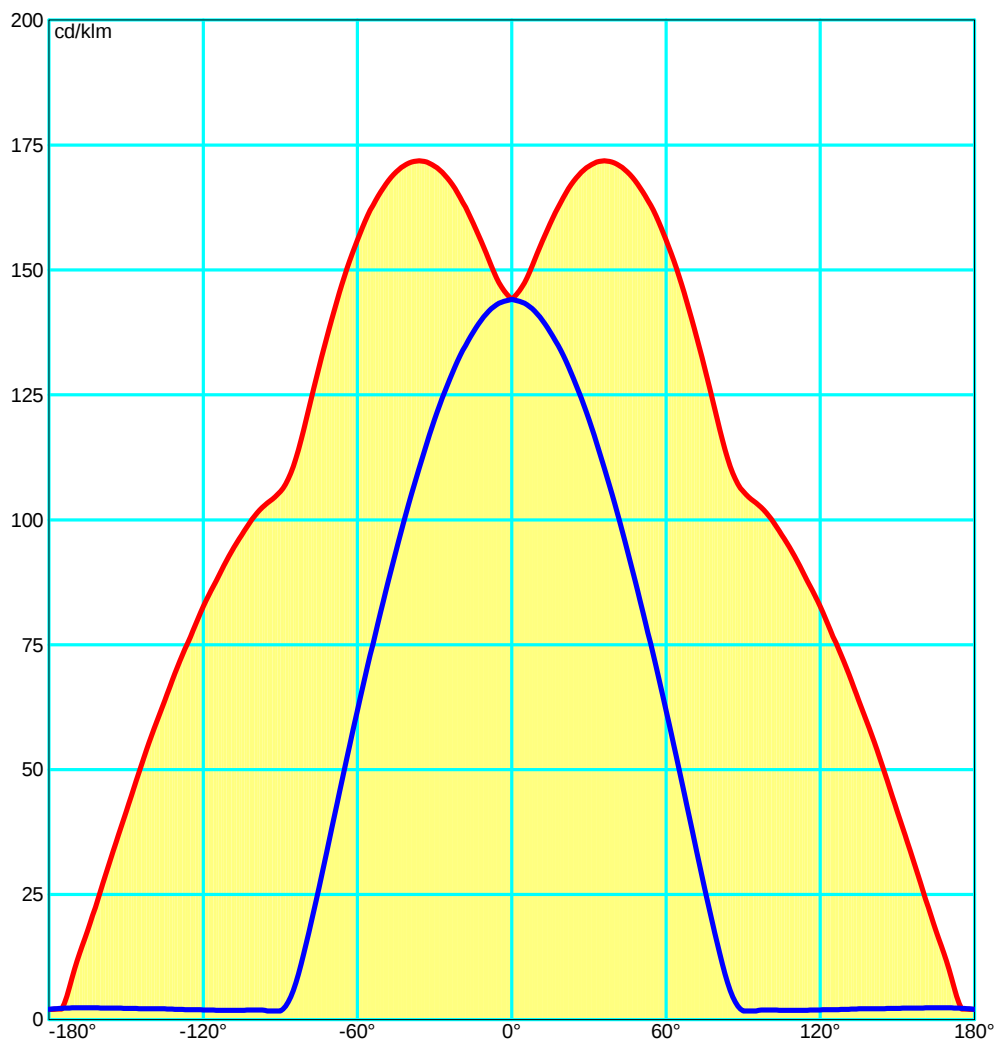

Luminaire


Code PX-0278-INO
Name Applique LITUS LED 6W 4000K

Measur.

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

Luminance

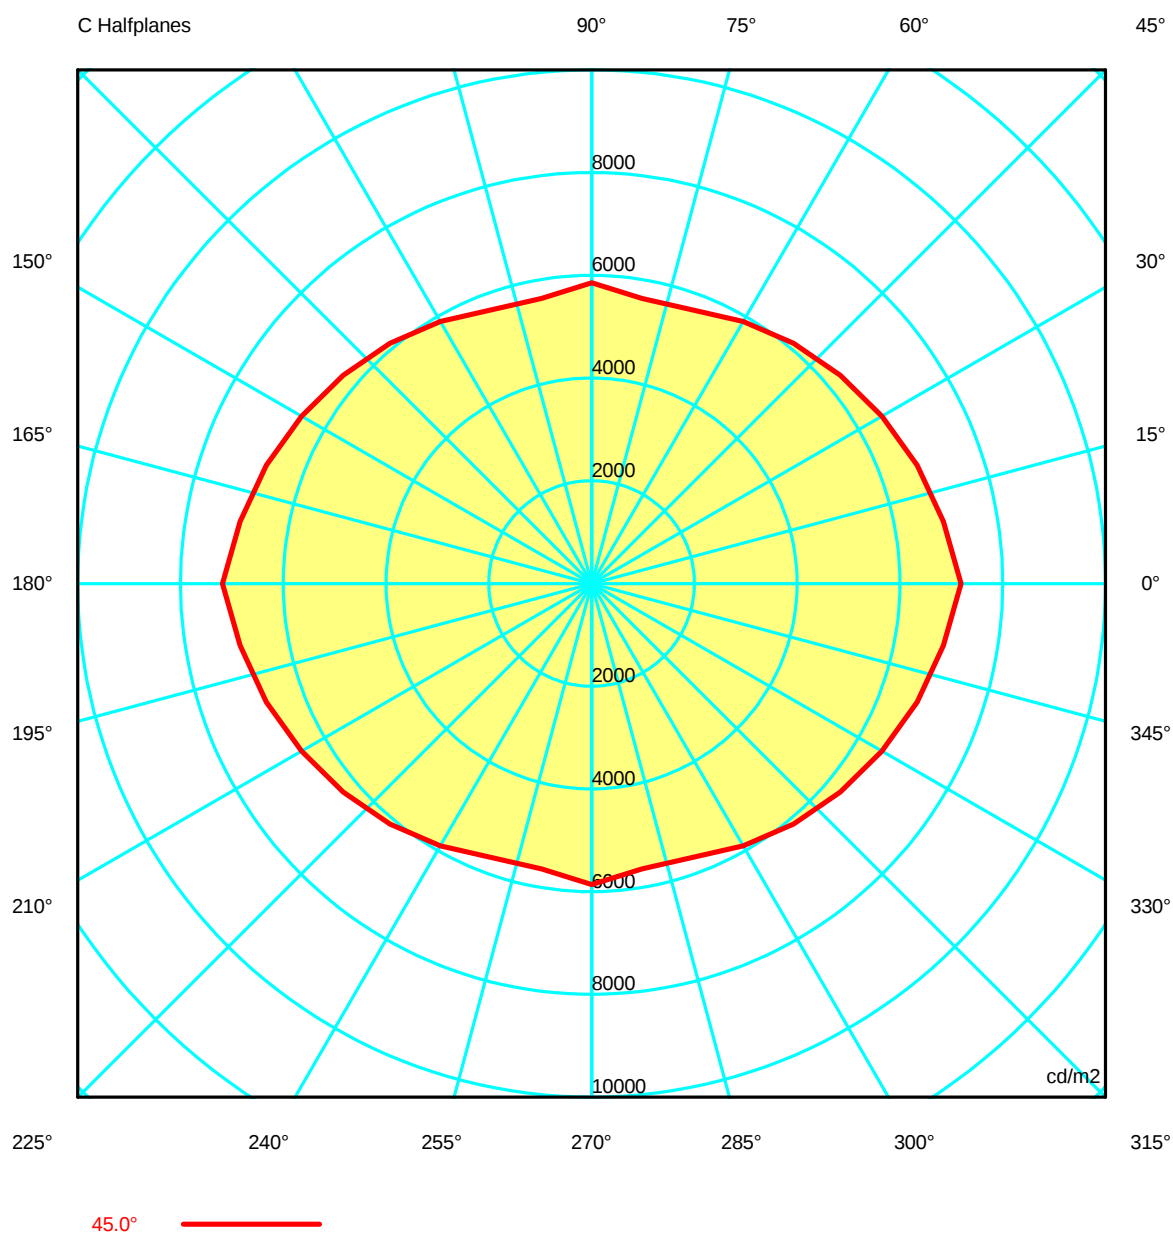

Luminaire

Code PX-0278-INO
 Name Aplique LITUS LED 6W 4000K
Measurment.
 Code CL116A17F007G
 Name Aplique LITUS LED 6W 4000K

Luminaire Flux		419.58 lm		Luminaire Power		6.97 W		Efficacy		60.20 lm/W		Efficiency		100.00%	
Lamps Flux		419.58 lm		Maximum value		171.80 cd/klm		Position		C=0.00 G=35.00		CG		Double Symmetrical	
Luminance cd/m2														Table 1/3	
		C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00	
G 0.0	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11
G 5.0	8158.21	8102.90	8076.29	8070.66	8069.99	8086.77	8125.48	8179.23	8257.73	8361.41	8257.73	8179.23	8125.48		
G 10.0	7935.04	7843.45	7786.81	7749.92	7715.98	7708.44	7736.01	7791.32	7905.92	8084.07	7905.92	7791.32	7736.01		
G 15.0	7793.91	7682.47	7600.73	7530.12	7463.40	7419.88	7412.02	7447.74	7572.70	7792.41	7572.70	7447.74	7412.02		
G 20.0	7692.66	7548.60	7436.92	7336.64	7244.55	7174.37	7132.26	7129.06	7245.77	7501.06	7245.77	7129.06	7132.26		
G 25.0	7595.02	7426.18	7294.83	7171.14	7046.05	6944.93	6872.60	6829.06	6926.01	7198.21	6926.01	6829.06	6872.60		
G 30.0	7493.27	7306.71	7154.91	7006.61	6859.62	6729.30	6617.70	6535.54	6612.52	6892.08	6612.52	6535.54	6617.70		
G 35.0	7393.72	7187.48	7017.04	6847.29	6677.08	6518.80	6372.72	6251.60	6295.57	6556.50	6295.57	6251.60	6372.72		
G 40.0	7291.25	7064.90	6877.08	6688.47	6497.44	6316.75	6138.40	5965.19	5969.20	6222.32	5969.20	5965.19	6138.40		
G 45.0	7188.45	6946.27	6736.80	6521.99	6312.17	6107.72	5893.03	5675.63	5637.83	5859.96	5637.83	5675.63	5893.03		
G 50.0	7079.94	6818.06	6595.45	6363.72	6122.95	5892.28	5652.43	5383.11	5290.86	5476.82	5290.86	5383.11	5652.43		
G 55.0	6969.90	6690.89	6443.81	6182.81	5922.74	5668.94	5392.09	5073.38	4924.35	5051.78	4924.35	5073.38	5392.09		
G 60.0	6843.23	6538.44	6279.73	6010.09	5724.72	5434.83	5113.07	4732.86	4516.52	4579.05	4516.52	4732.86	5113.07		
G 65.0	6711.60	6396.38	6108.62	5801.24	5498.79	5169.63	4781.25	4351.63	4072.62	4031.82	4072.62	4351.63	4781.25		
G 70.0	6551.83	6205.41	5913.76	5600.29	5242.78	4879.03	4475.06	3952.85	3548.30	3383.93	3548.30	3952.85	4475.06		
G 75.0	6385.85	6033.27	5704.54	5344.48	4983.90	4594.00	4111.42	3495.89	2968.11	2614.59	2968.11	3495.89	4111.42		
G 80.0	6208.80	5831.93	5506.24	5146.93	4734.32	4290.34	3758.03	3028.70	2329.95	1727.14	2329.95	3028.70	3758.03		
G 85.0	6123.96	5750.94	5391.52	4982.63	4564.16	4083.87	3455.27	2615.97	1744.05	787.56	1744.05	2615.97	3455.27		
G 90.0	6332.71	5908.94	5534.68	5119.25	4661.52	4152.27	3501.44	2566.95	1537.03	288.06	1537.03	2566.95	3501.44		

Luminaire

Code PX-0278-INO
Name Applique LITUS LED 6W 4000K

Measurment

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K

Luminaire Flux		419.58 lm		Luminaire Power		6.97 W		Efficacy		60.20 lm/W		Efficiency		100.00%	
Lamps Flux		419.58 lm		Maximum value		171.80 cd/klm		Position		C=0.00 G=35.00		CG		Double Symmetrical	
Luminance cd/m2														Table 2/3	
		C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00	
G 0.0	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11
G 5.0	8086.77	8069.99	8070.66	8076.29	8102.90	8158.21	8102.90	8076.29	8070.66	8069.99	8086.77	8125.48	8179.23		8179.23
G 10.0	7708.44	7715.98	7749.92	7786.81	7843.45	7935.04	7843.45	7786.81	7749.92	7715.98	7708.44	7736.01	7791.32		7791.32
G 15.0	7419.88	7463.40	7530.12	7600.73	7682.47	7793.91	7682.47	7600.73	7530.12	7463.40	7419.88	7412.02	7447.74		7447.74
G 20.0	7174.37	7244.55	7336.64	7436.92	7548.60	7692.66	7548.60	7436.92	7336.64	7244.55	7174.37	7132.26	7129.06		7129.06
G 25.0	6944.93	7046.05	7171.14	7294.83	7426.18	7595.02	7426.18	7294.83	7171.14	7046.05	6944.93	6872.60	6829.06		6829.06
G 30.0	6729.30	6859.62	7006.61	7154.91	7306.71	7493.27	7306.71	7154.91	7006.61	6859.62	6729.30	6617.70	6535.54		6535.54
G 35.0	6518.80	6677.08	6847.29	7017.04	7187.48	7393.72	7187.48	7017.04	6847.29	6677.08	6518.80	6372.72	6251.60		6251.60
G 40.0	6316.75	6497.44	6688.47	6877.08	7064.90	7291.25	7064.90	6877.08	6688.47	6497.44	6316.75	6138.40	5965.19		5965.19
G 45.0	6107.72	6312.17	6521.99	6736.80	6946.27	7188.45	6946.27	6736.80	6521.99	6312.17	6107.72	5893.03	5675.63		5675.63
G 50.0	5892.28	6122.95	6363.72	6595.45	6818.06	7079.94	6818.06	6595.45	6363.72	6122.95	5892.28	5652.43	5383.11		5383.11
G 55.0	5668.94	5922.74	6182.81	6443.81	6690.89	6969.90	6690.89	6443.81	6182.81	5922.74	5668.94	5392.09	5073.38		5073.38
G 60.0	5434.83	5724.72	6010.09	6279.73	6538.44	6843.23	6538.44	6279.73	6010.09	5724.72	5434.83	5113.07	4732.86		4732.86
G 65.0	5169.63	5498.79	5801.24	6108.62	6396.38	6711.60	6396.38	6108.62	5801.24	5498.79	5169.63	4781.25	4351.63		4351.63
G 70.0	4879.03	5242.78	5600.29	5913.76	6205.41	6551.83	6205.41	5913.76	5600.29	5242.78	4879.03	4475.06	3952.85		3952.85
G 75.0	4594.00	4983.90	5344.48	5704.54	6033.27	6385.85	6033.27	5704.54	5344.48	4983.90	4594.00	4111.42	3495.89		3495.89
G 80.0	4290.34	4734.32	5146.93	5506.24	5831.93	6208.80	5831.93	5506.24	5146.93	4734.32	4290.34	3758.03	3028.70		3028.70
G 85.0	4083.87	4564.16	4982.63	5391.52	5750.94	6123.96	5750.94	5391.52	4982.63	4564.16	4083.87	3455.27	2615.97		2615.97
G 90.0	4152.27	4661.52	5119.25	5534.68	5908.94	6332.71	5908.94	5534.68	5119.25	4661.52	4152.27	3501.44	2566.95		2566.95

Luminaire

Code PX-0278-INO
Name Aplique LITUS LED 6W 4000K

Measur.

Code CL116A17F007G
Name Aplique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

Luminance cd/m2 Table 3/3

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11	8636.11
G 5.0	8257.73	8361.41	8257.73	8179.23	8125.48	8086.77	8069.99	8070.66	8076.29	8102.90
G 10.0	7905.92	8084.07	7905.92	7791.32	7736.01	7708.44	7715.98	7749.92	7786.81	7843.45
G 15.0	7572.70	7792.41	7572.70	7447.74	7412.02	7419.88	7463.40	7530.12	7600.73	7682.47
G 20.0	7245.77	7501.06	7245.77	7129.06	7132.26	7174.37	7244.55	7336.64	7436.92	7548.60
G 25.0	6926.01	7198.21	6926.01	6829.06	6872.60	6944.93	7046.05	7171.14	7294.83	7426.18
G 30.0	6612.52	6892.08	6612.52	6535.54	6617.70	6729.30	6859.62	7006.61	7154.91	7306.71
G 35.0	6295.57	6556.50	6295.57	6251.60	6372.72	6518.80	6677.08	6847.29	7017.04	7187.48
G 40.0	5969.20	6222.32	5969.20	5965.19	6138.40	6316.75	6497.44	6688.47	6877.08	7064.90
G 45.0	5637.83	5859.96	5637.83	5675.63	5893.03	6107.72	6312.17	6521.99	6736.80	6946.27
G 50.0	5290.86	5476.82	5290.86	5383.11	5652.43	5892.28	6122.95	6363.72	6595.45	6818.06
G 55.0	4924.35	5051.78	4924.35	5073.38	5392.09	5668.94	5922.74	6182.81	6443.81	6690.89
G 60.0	4516.52	4579.05	4516.52	4732.86	5113.07	5434.83	5724.72	6010.09	6279.73	6538.44
G 65.0	4072.62	4031.82	4072.62	4351.63	4781.25	5169.63	5498.79	5801.24	6108.62	6396.38
G 70.0	3548.30	3383.93	3548.30	3952.85	4475.06	4879.03	5242.78	5600.29	5913.76	6205.41
G 75.0	2968.11	2614.59	2968.11	3495.89	4111.42	4594.00	4983.90	5344.48	5704.54	6033.27
G 80.0	2329.95	1727.14	2329.95	3028.70	3758.03	4290.34	4734.32	5146.93	5506.24	5831.93
G 85.0	1744.05	787.56	1744.05	2615.97	3455.27	4083.87	4564.16	4982.63	5391.52	5750.94
G 90.0	1537.03	288.06	1537.03	2566.95	3501.44	4152.27	4661.52	5119.25	5534.68	5908.94

Luminaire

Code PX-0278-INO
Name Aplique LITUS LED 6W 4000K


Measur.

Code CL116A17F007G
Name Aplique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 5.8 Tight Tilting Angle:0°

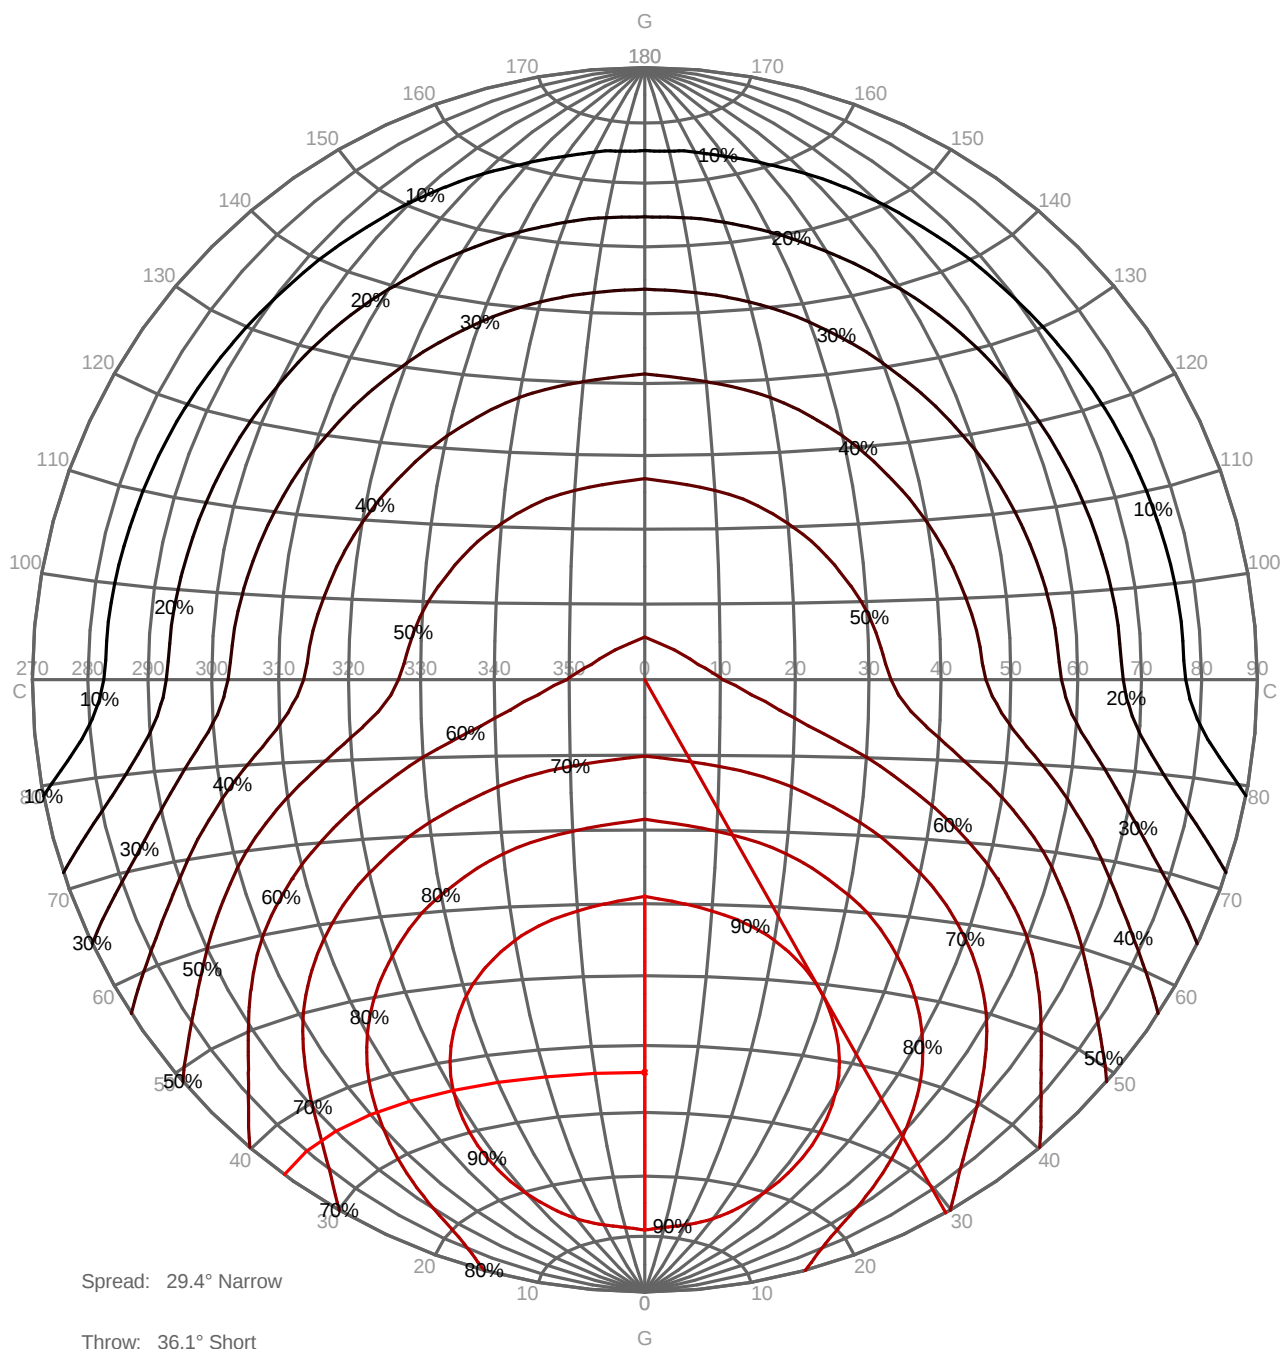

Luminaire

Code PX-0278-INO
Name Aplique LITUS LED 6W 4000K


Measurem.

Code CL116A17F007G
Name Aplique LITUS LED 6W 4000K

Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

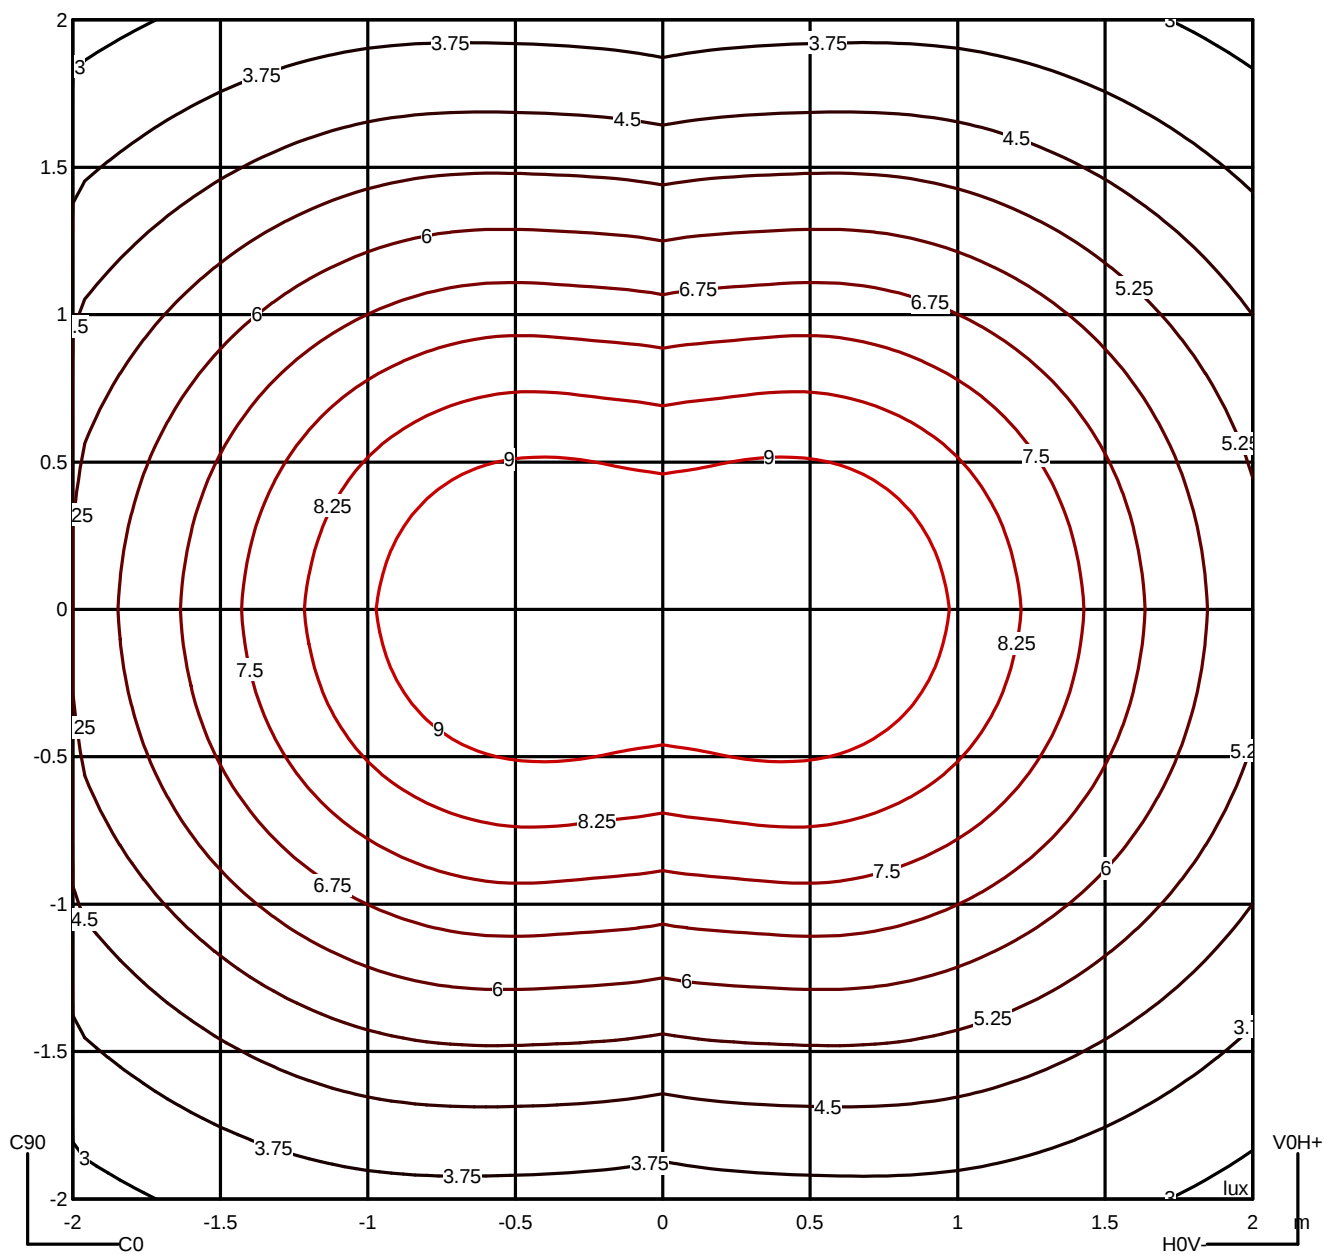

Luminaire

Code PX-0278-INO
Name Applique LITUS LED 6W 4000K


Measur.

Code CL116A17F007G
Name Applique LITUS LED 6W 4000K


Luminaire Flux	419.58 lm	Luminaire Power	6.97 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	419.58 lm	Maximum value	171.80 cd/klm	Position	C=0.00 G=35.00	CG	Double Symmetrical


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	
7188	7080	6970	6843	6712	6552	6386	6209	6124	---	
5860	5477	5052	4579	4032	3384	2615	1727	788	---	

Flush mounted or longitudinal view												
Illumination(lx)												
A	A	2000	1000	750	500	<300						1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

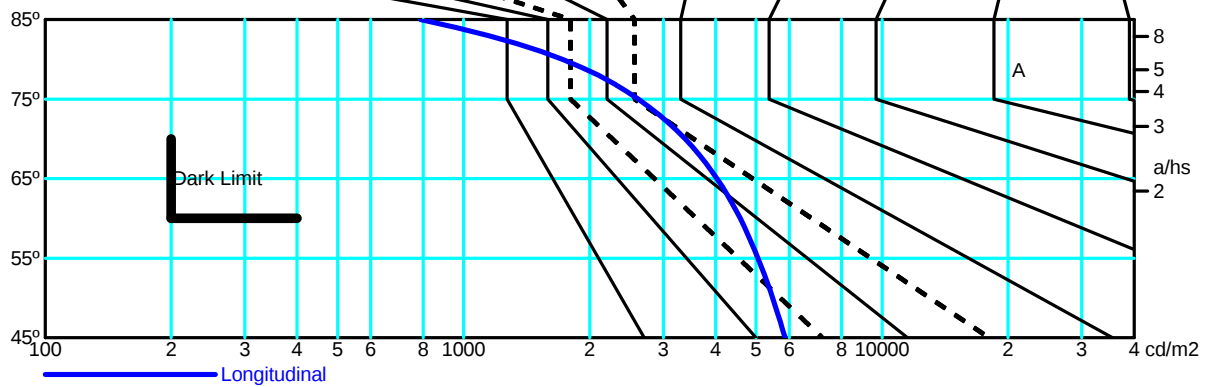


Flush mounted or transversal view												
Illumination(lx)												
A	A	2000	1000	750	500	<300						1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

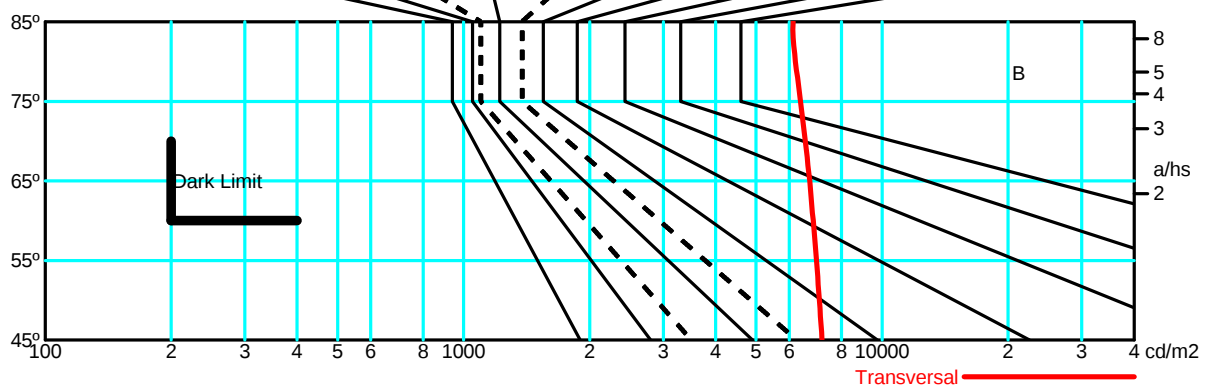


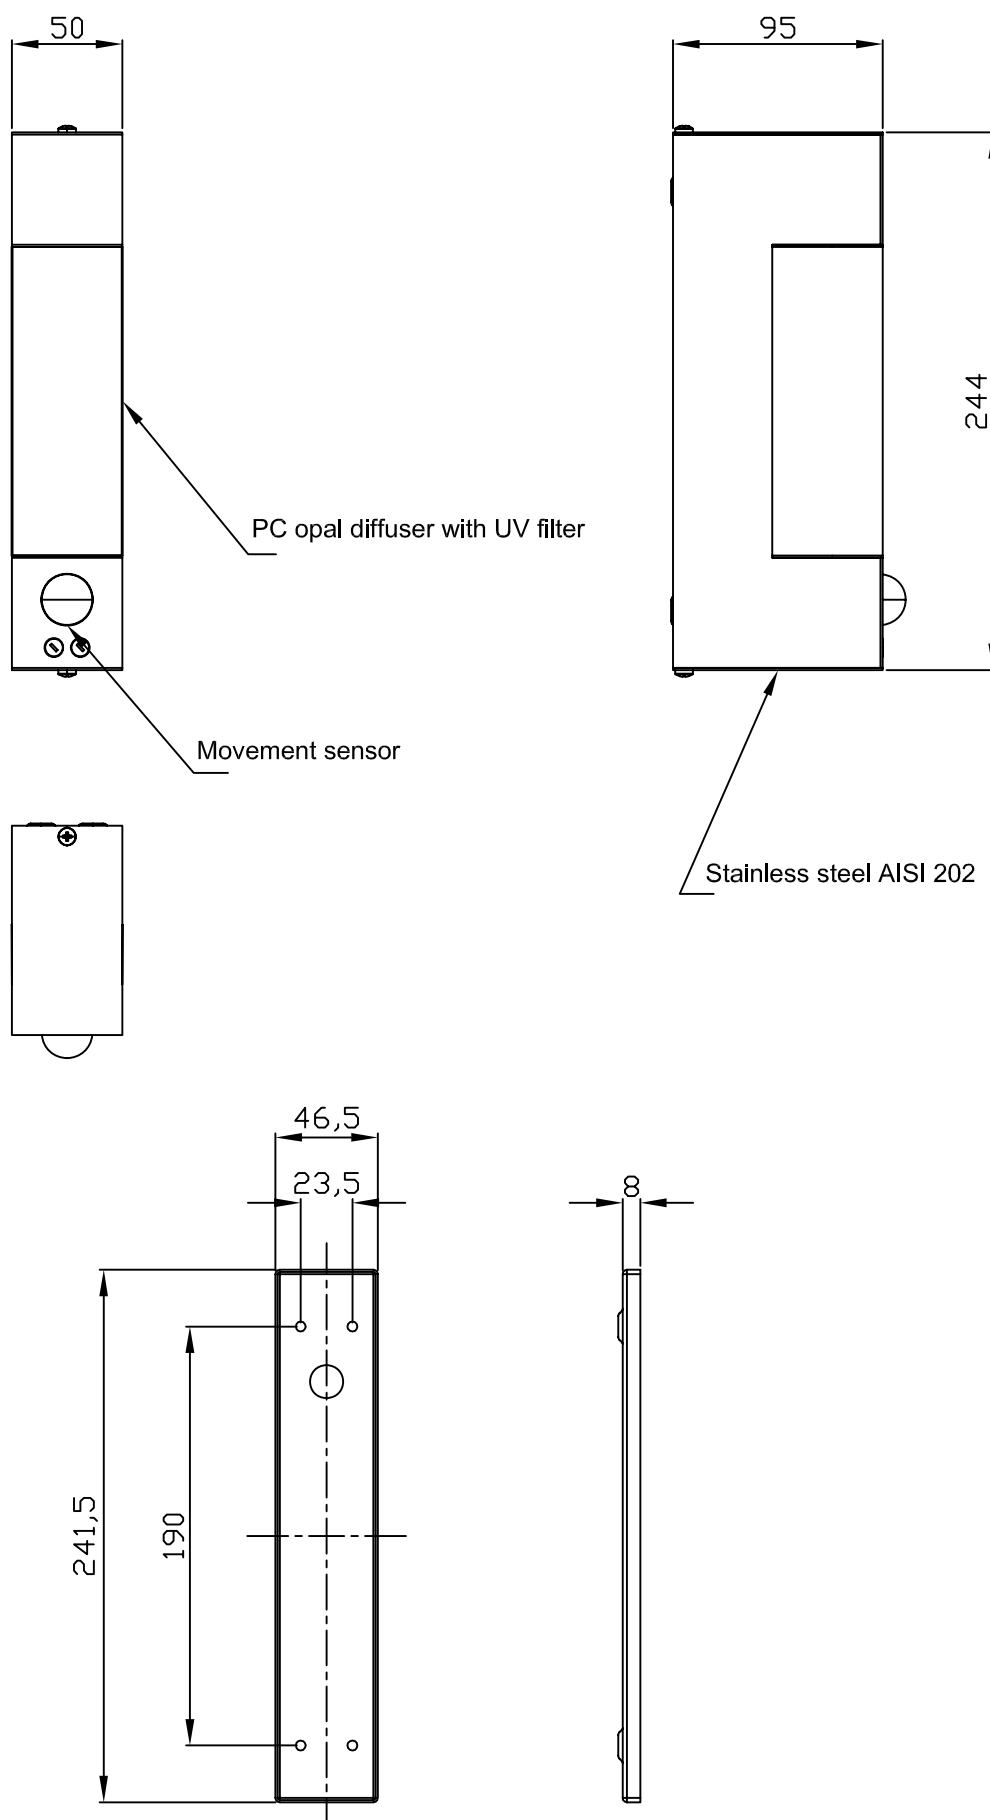


①

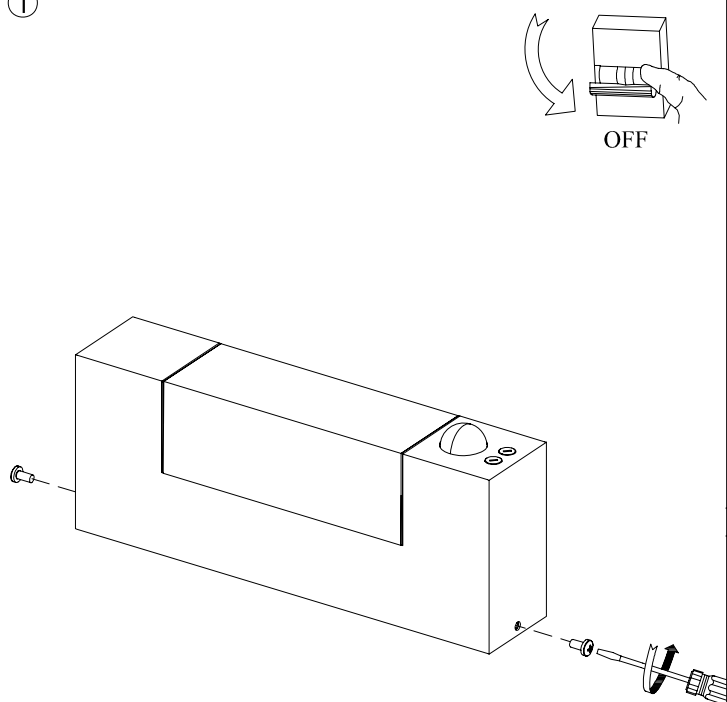

②

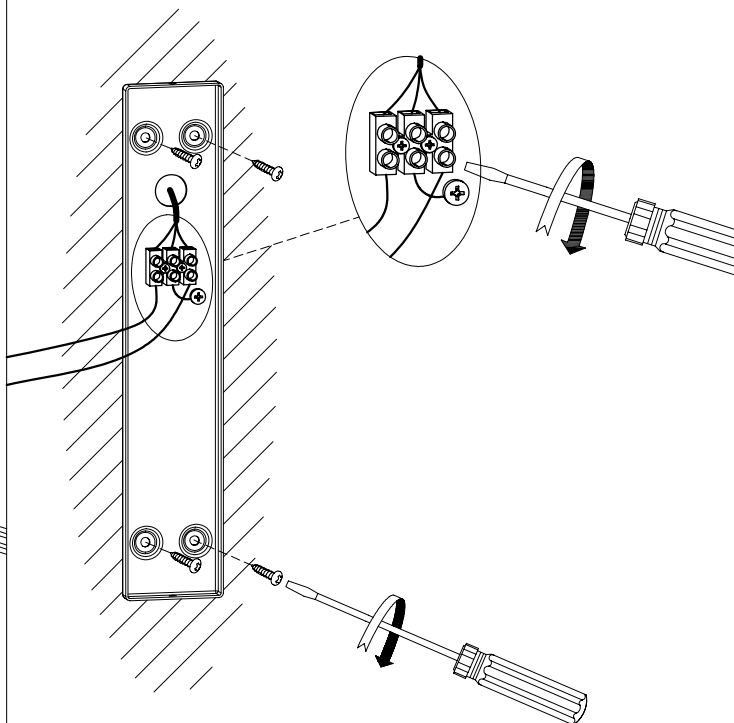

③

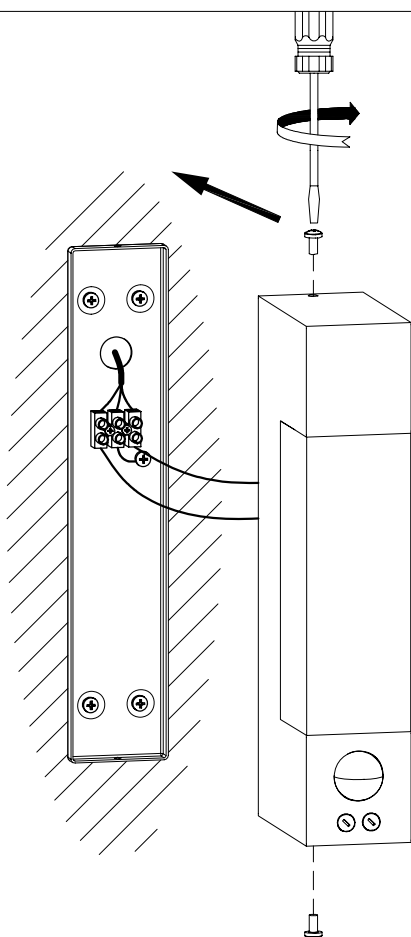

④

