
Minimal

PX-0361-NEG

Proyector IP65 Minimal LED 6.8W 4000K ON-OFF Negro 680.00





CARACTERÍSTICAS TÉCNICAS

IP65 IK10 ±90°

Potencia total luminaria : 6.8W

Lúmenes reales : 298

Lúmenes nominales : 680

Lm / W reales : 44

Ángulo Ópticas / Reflector : FLOOD 69º

UGR : <=22

Material de la estructura : Aluminio, Acero

Acabado estructura : Negro

Material del difusor : Cristal

Acabado difusor : Transparente

Voltaje / Frecuencia : 100-240V ~ 50/60Hz

Protocolo de regulación : ON-OFF

Power Factor : 0.40

Vida útil : 36.000h L70B30

Garantía : 2 Años

Luminaria fácilmente reciclable


CARACTERÍSTICAS LUMINOTÉCNICAS


CRI: 80

MacAdam steps: 3

Riesgo fotobiológico: RG1

Portalámparas	Cantidad	Potencia fuente de luz (W)	Temperatura de color correlacionada (CCT)
LED	1	5.7W	4000K





LOGÍSTICA


Peso neto (Kg): 0.31

Peso embalado (Kg): 0.37

Embalaje: 80mm x 80mm x 165mm

12 Un

APLICACIÓN DE LA LUMINARIA

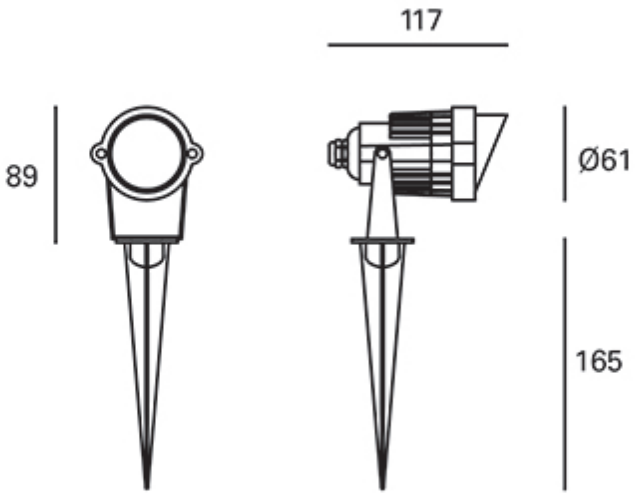

La imagen puede no coincidir con la referencia, LEDS C4 se reserva el derecho de modificación de alguno de los componentes que componen el producto. Los datos relativos al flujo, la potencia y la Temperatura de Color están sujetos a una tolerancia de +- 10%.

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K


Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Round Luminaire	Diam. 60 mm	Height	100 mm
Round Luminous Area	Diam. 46 mm	Height	0 mm
Horizontal Luminous Area	0.001662 m2	Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.000402 m2
Coordinate system	CG Roads	Symmetry Type	Sym. on planes 270-90
Date	22-07-2016	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	298.38 lm
Operator	Asselum T3	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			


Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	PX-0144-NEG	PX-0144-NEG	298.38	7.00	1

C.I.E. 88 98 100 100 100 D DIN 5040 A60



ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

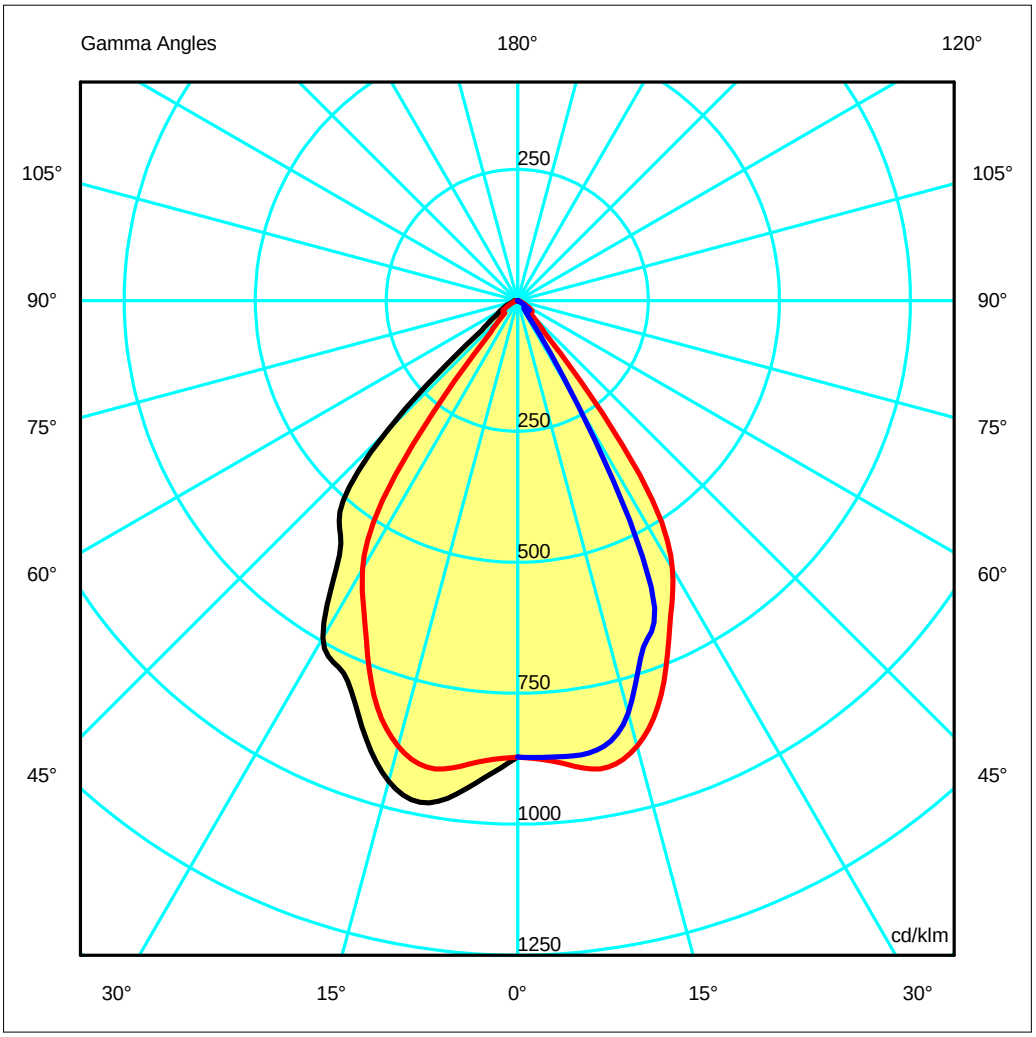

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K


Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90


Luminous Intensity Table cd/klm **Table 1/1**


	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	871.63	871.63	871.63	871.63	871.63	871.63	871.63	871.63	871.63	871.63	871.63	871.63	871.63
G 5.0	925.17	921.09	914.48	904.70	896.24	887.76	884.59	881.78	881.17	879.20	876.62	875.36	874.65
G 10.0	973.80	967.85	957.76	943.67	928.16	916.15	907.94	900.39	893.68	883.20	879.62	874.31	871.53
G 15.0	950.12	947.71	940.01	928.27	910.86	895.33	880.83	864.82	850.82	836.09	823.24	817.55	815.88
G 20.0	866.80	866.30	860.39	851.49	836.47	822.79	801.23	781.20	762.10	743.50	721.93	707.08	703.69
G 25.0	785.29	782.64	775.22	766.49	745.11	727.70	687.39	652.30	634.00	622.66	616.15	607.37	603.26
G 30.0	743.16	740.20	716.75	684.00	631.23	608.85	590.61	574.38	515.10	412.68	323.12	264.66	233.01
G 35.0	592.40	589.12	573.19	566.68	559.86	528.05	406.90	255.94	118.81	57.61	32.44	28.73	27.71
G 40.0	527.08	527.82	514.35	467.07	341.16	201.05	80.14	33.63	28.01	24.42	21.74	19.42	18.85
G 45.0	353.55	334.96	255.78	154.58	65.42	40.43	34.40	29.09	26.59	25.17	23.87	22.66	22.46
G 50.0	89.32	77.94	57.50	51.29	44.25	40.70	35.72	34.10	33.23	31.17	31.14	29.42	29.71
G 55.0	50.10	45.07	41.85	39.87	40.57	40.75	33.25	33.90	32.68	25.24	21.69	17.53	17.65
G 60.0	35.81	33.01	32.70	31.43	31.09	29.08	20.98	18.68	17.00	13.30	10.44	7.45	6.68
G 65.0	24.80	22.87	20.95	18.57	16.25	14.28	11.62	9.20	6.43	4.30	2.79	1.99	1.50
G 70.0	12.62	12.15	11.54	10.59	9.49	8.18	6.37	4.30	2.88	1.42	0.45	0.42	0.43
G 75.0	8.26	7.99	7.63	7.04	6.17	4.74	3.43	2.12	0.99	0.56	0.58	0.60	0.62
G 80.0	5.82	5.51	5.15	4.54	3.70	2.75	1.80	1.03	0.73	0.74	0.77	0.81	0.84
G 85.0	3.83	3.69	3.29	2.74	2.20	1.65	1.19	0.90	0.91	0.93	0.97	1.01	1.05
G 90.0	2.66	2.56	2.31	2.00	1.64	1.29	1.07	1.08	1.09	1.10	1.15	1.21	1.25

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90



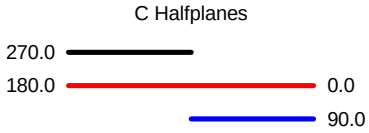

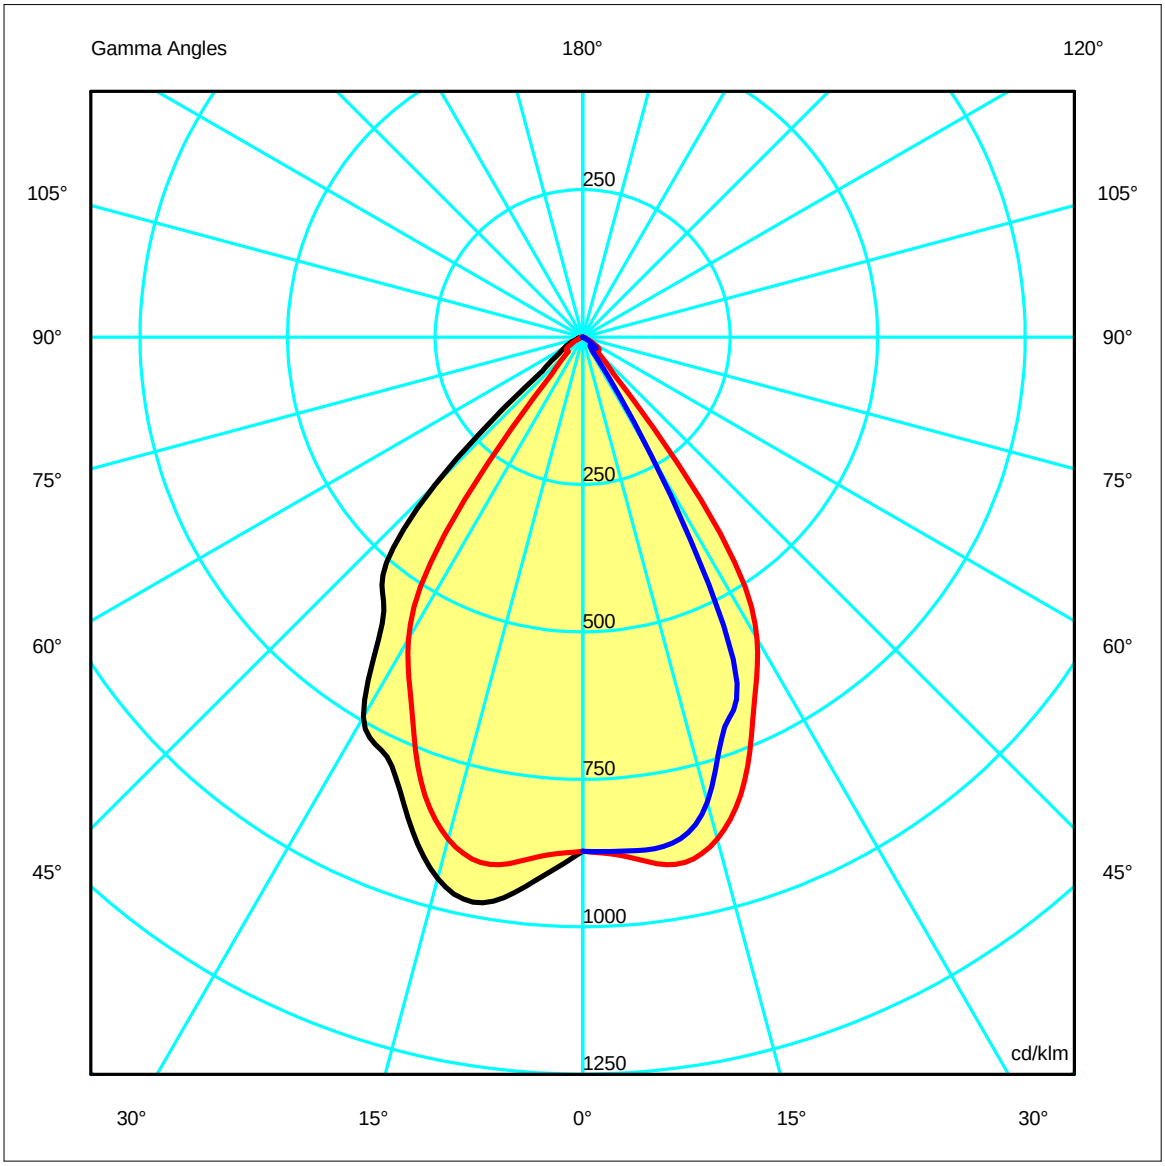

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K


Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Width at 50.00 % of Max Intensity


H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.68	1.36	2.03	2.71	3.39	OC	0.51	1.03	1.54	2.06	2.57
OB	0.68	1.36	2.03	2.71	3.39	OD	0.92	1.85	2.77	3.70	4.62

Luminous Intensities [cd/klm]


	0	5	15	25	35	45	55	65	75	85
OA	260.08	263.95	262.82	205.10	121.41	10.27	9.92	3.47	1.02	0.35
OB	260.08	263.95	262.82	205.10	121.41	10.27	9.92	3.47	1.02	0.35
OC	260.08	260.98	243.44	180.00	8.27	6.70	5.27	0.45	0.19	0.31
OD	260.08	276.05	283.50	234.32	176.76	105.49	14.95	7.40	2.47	1.14

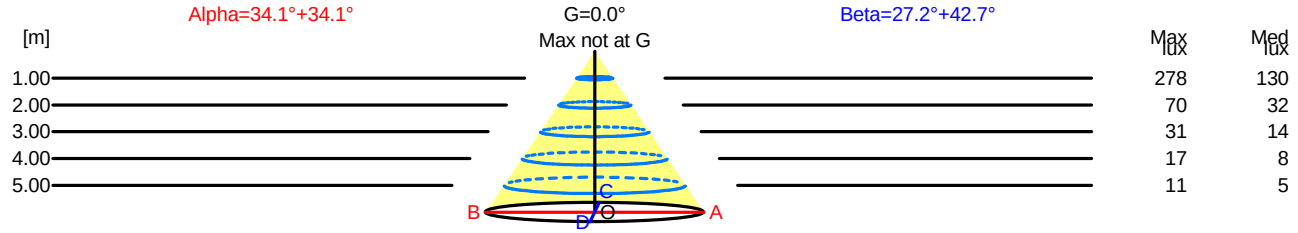

H[m]	D[m]	Max lux	Med lux
1.00	1.36	278	130
2.00	2.71	70	32
3.00	4.07	31	14
4.00	5.42	17	8
5.00	6.78	11	5

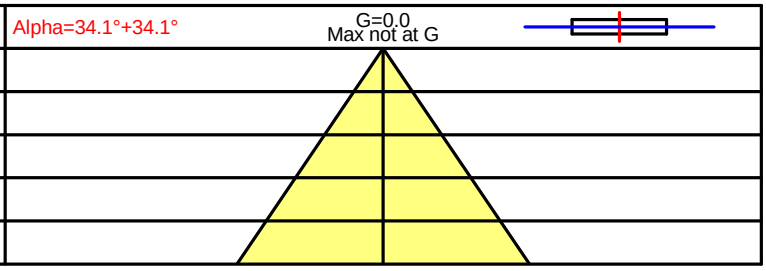

H[m]	D[m]	Max lux	Med lux
1.00	1.44	278	130
2.00	2.88	70	32
3.00	4.31	31	14
4.00	5.75	17	8
5.00	7.19	11	5

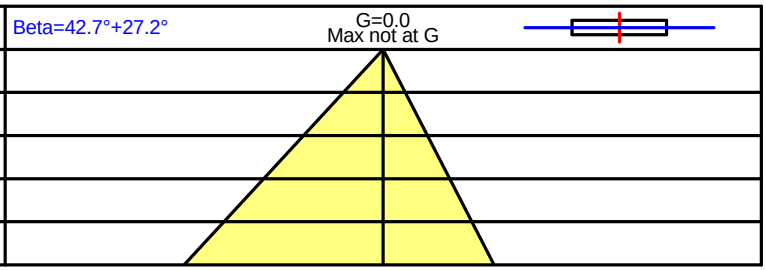

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K


Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90


UGR
S = 0.250


Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	20.0	20.8	20.3	21.0	25.5	24.4	25.1	24.6	25.3	25.5
x=2H y=3H	20.0	20.7	20.2	20.9	25.5	24.3	25.0	24.6	25.3	25.5
x=2H y=4H	19.9	20.6	20.2	20.8	25.5	24.3	24.9	24.6	25.2	25.5
x=2H y=6H	19.8	20.4	20.2	20.7	25.4	24.3	24.9	24.6	25.1	25.4
x=2H y=8H	19.8	20.4	20.2	20.7	25.4	24.2	24.8	24.6	25.1	25.4
x=2H y=12H	19.8	20.3	20.1	20.6	25.4	24.2	24.8	24.6	25.1	25.4
x=4H y=2H	19.9	20.6	20.2	20.8	25.4	24.2	24.9	24.5	25.1	25.4
x=4H y=3H	19.9	20.5	20.2	20.7	25.4	24.2	24.8	24.6	25.1	25.4
x=4H y=4H	19.9	20.4	20.3	20.7	25.3	24.2	24.7	24.6	25.0	25.3
x=4H y=6H	19.8	20.2	20.2	20.6	25.3	24.2	24.6	24.6	25.0	25.3
x=4H y=8H	19.8	20.2	20.2	20.6	25.3	24.2	24.6	24.6	24.9	25.3
x=4H y=12H	19.8	20.1	20.2	20.5	25.3	24.2	24.5	24.6	24.9	25.3
x=8H y=4H	19.8	20.2	20.2	20.6	25.3	24.1	24.5	24.5	24.9	25.3
x=8H y=6H	19.8	20.1	20.2	20.5	25.3	24.1	24.4	24.6	24.8	25.3
x=8H y=8H	19.8	20.0	20.2	20.4	25.3	24.1	24.4	24.6	24.8	25.3
x=8H y=12H	19.8	19.9	20.2	20.4	25.3	24.2	24.4	24.6	24.8	25.3
x=12H y=4H	19.8	20.1	20.2	20.5	25.2	24.1	24.4	24.5	24.8	25.2
x=12H y=6H	19.8	20.0	20.2	20.4	25.2	24.1	24.3	24.6	24.8	25.2
x=12H y=8H	19.8	19.9	20.2	20.4	25.3	24.1	24.3	24.6	24.8	25.3

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90






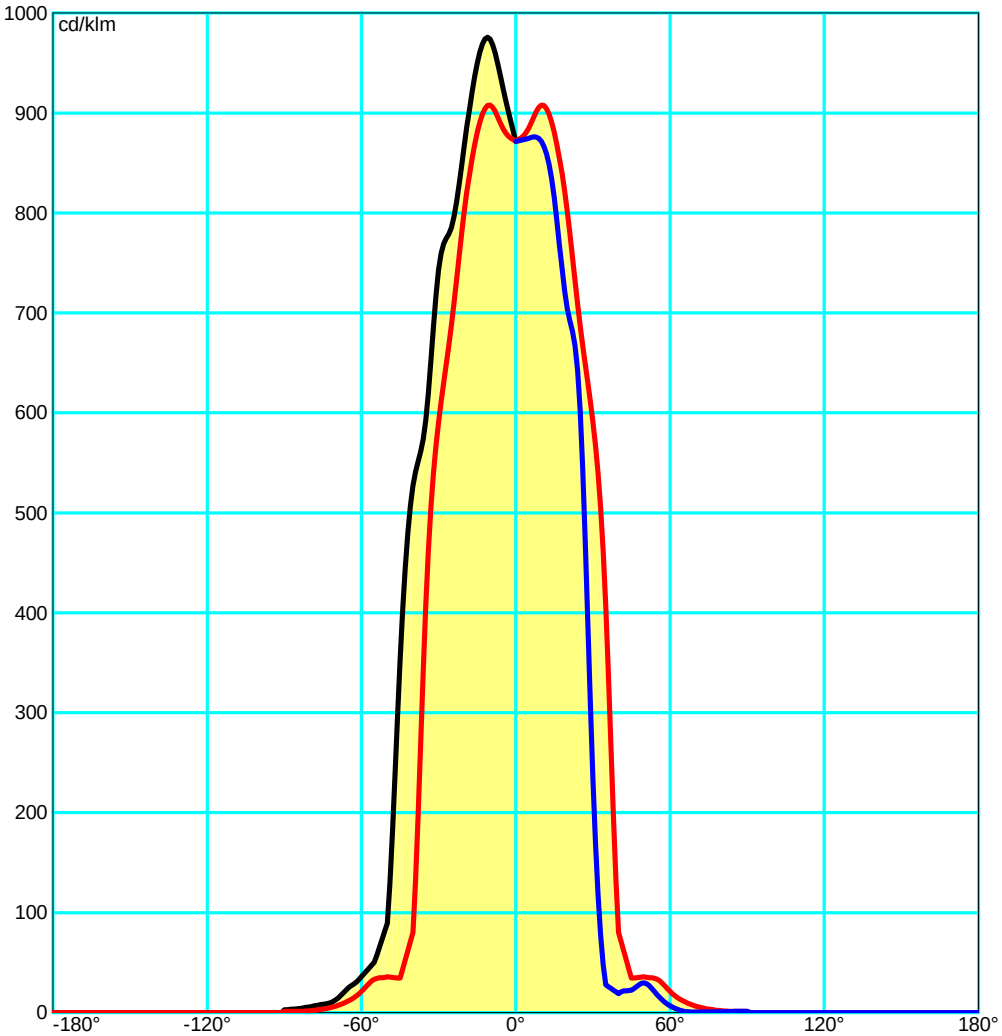

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Luminance

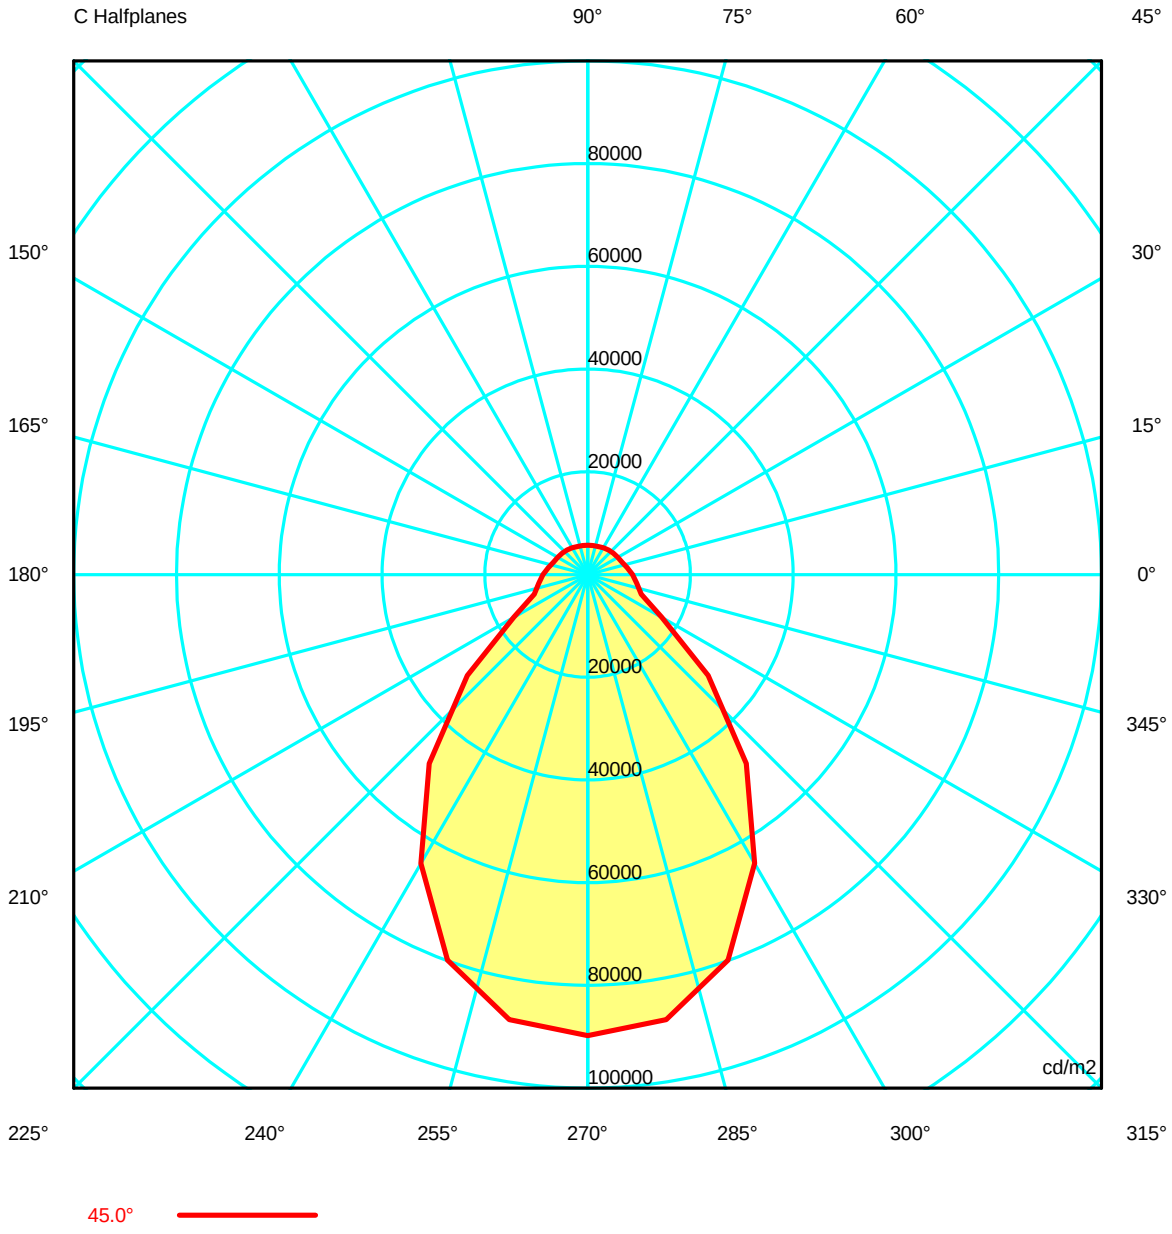

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07
G 5.0	159427.78	159063.45	158857.89	158810.88	158608.96	158289.45	157990.36	157817.83	157718.27	157636.03	157718.27	157817.83	157990.36
G 10.0	165527.02	164574.17	163790.47	162928.00	161579.59	160701.45	160365.16	159724.16	159161.89	158888.76	159161.89	159724.16	160365.16
G 15.0	163724.79	161722.65	159851.42	158145.61	156331.75	154511.98	153018.68	152184.33	151816.91	151652.36	151816.91	152184.33	153018.68
G 20.0	153086.63	150484.96	148026.99	145609.51	143298.53	140690.01	137934.56	135788.46	134703.04	134449.49	134703.04	135788.46	137934.56
G 25.0	136172.27	131148.74	127725.56	125597.32	123966.87	122893.45	122060.43	120867.68	119940.92	119507.01	119940.92	120867.68	122060.43
G 30.0	122443.71	120700.29	116277.10	106789.68	92892.92	78709.77	66988.56	58166.78	52269.48	48307.37	52269.48	58166.78	66988.56
G 35.0	89184.08	67300.87	44941.94	26040.67	15642.63	10219.52	7109.97	6568.03	6262.97	6074.05	6262.97	6568.03	7109.97
G 40.0	18782.09	9792.24	6981.27	6564.06	6038.45	5477.19	5094.88	4702.32	4465.16	4419.04	4465.16	4702.32	5094.88
G 45.0	8735.37	7782.46	7099.63	6751.51	6503.32	6283.13	6061.21	5834.63	5736.09	5701.95	5736.09	5834.63	6061.21
G 50.0	9977.23	9581.60	9482.94	9282.47	8853.27	8703.06	8699.02	8371.36	8170.13	8297.71	8170.13	8371.36	8699.02
G 55.0	10409.12	10543.48	10735.22	10229.71	8653.02	7423.33	6789.35	5853.55	5349.83	5523.82	5349.83	5853.55	6789.35
G 60.0	7534.01	6797.22	6593.99	6105.11	5222.23	4408.09	3748.12	2981.83	2500.39	2397.10	2500.39	2981.83	3748.12
G 65.0	4936.06	4257.38	3519.34	2730.32	2094.19	1582.91	1183.55	933.68	770.78	636.31	770.78	933.68	1183.55
G 70.0	3345.72	2593.59	1981.36	1513.92	998.05	523.50	236.16	226.17	222.09	223.92	222.09	226.17	236.16
G 75.0	2379.90	1776.20	1174.63	684.46	434.07	390.69	399.19	414.03	420.64	430.41	420.64	414.03	399.19
G 80.0	1860.31	1283.01	904.77	754.73	747.39	776.49	796.64	821.97	845.99	865.00	845.99	821.97	796.64
G 85.0	2449.65	1982.45	1862.40	1882.00	1904.82	1928.49	1992.99	2059.66	2115.38	2161.83	2115.38	2059.66	1992.99
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07
G 5.0	158289.45	158608.96	158810.88	158857.89	159063.45	159427.78	159729.09	160432.37	161526.94	162527.47	163638.04	164813.73	165682.63
G 10.0	160701.45	161579.59	162928.00	163790.47	164574.17	165527.02	166481.76	167657.74	169213.44	171082.81	172959.99	174609.34	175931.96
G 15.0	154511.98	156331.75	158145.61	159851.42	161722.65	163724.79	165540.59	167322.27	169305.48	171525.39	173393.24	174724.45	175781.41
G 20.0	140690.01	143298.53	145609.51	148026.99	150484.96	153086.63	155955.86	158177.26	159818.58	161785.31	163387.36	164389.01	165235.49
G 25.0	122893.45	123966.87	125597.32	127725.56	131148.74	136172.27	141897.55	145611.39	147608.14	150527.23	152677.25	153571.59	154592.42
G 30.0	78709.77	92892.92	106789.68	116277.10	120700.29	122443.71	124935.82	127329.13	130864.26	138131.98	144605.05	148594.14	152188.59
G 35.0	10219.52	15642.63	26040.67	44941.94	67300.87	89184.08	108770.58	119865.07	122709.48	123811.84	124514.33	125632.07	128056.86
G 40.0	5477.19	6038.45	6564.06	6981.27	9792.24	18782.09	36474.11	57962.25	79959.39	101218.08	115035.39	120550.22	123103.81
G 45.0	6283.13	6503.32	6751.51	7099.63	7782.46	8735.37	9695.76	11102.87	16610.74	30554.22	47994.13	64943.80	79858.92
G 50.0	8703.06	8853.27	9282.47	9482.94	9581.60	9977.23	10919.90	11672.18	12358.45	13727.17	14688.06	16060.71	19824.10
G 55.0	7423.33	8653.02	10229.71	10735.22	10543.48	10409.12	12022.17	13016.46	12698.91	12552.20	12616.67	13101.38	13716.67
G 60.0	4408.09	5222.23	6105.11	6593.99	6797.22	7534.01	9528.13	10682.94	11164.80	11246.05	11444.85	11740.67	11770.92
G 65.0	1582.91	2094.19	2730.32	3519.34	4257.38	4936.06	5708.02	6366.05	6903.35	7541.34	8241.90	8901.18	9454.80
G 70.0	523.50	998.05	1513.92	1981.36	2593.59	3345.72	4009.94	4544.06	4981.28	5373.29	5739.85	6057.56	6287.06
G 75.0	390.69	434.07	684.46	1174.63	1776.20	2379.90	2968.48	3630.47	4283.32	4722.26	5037.08	5294.24	5474.41
G 80.0	776.49	747.39	754.73	904.77	1283.01	1860.31	2513.44	3178.39	3822.67	4423.58	4936.33	5324.29	5585.81
G 85.0	1928.49	1904.82	1882.00	1862.40	1982.45	2449.65	3048.47	3761.82	4537.12	5280.80	6037.94	6781.76	7383.11
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency 100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG Sym. on planes 270-90

Luminance cd/m2 **Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07	156494.07
G 5.0	166278.91	166740.25	166278.91	165682.63	164813.73	163638.04	162527.47	161526.94	160432.37	159729.09
G 10.0	176869.87	177534.30	176869.87	175931.96	174609.34	172959.99	171082.81	169213.44	167657.74	166481.76
G 15.0	176390.41	176603.23	176390.41	175781.41	174724.45	173393.24	171525.39	169305.48	167322.27	165540.59
G 20.0	165550.86	165613.70	165550.86	165235.49	164389.01	163387.36	161785.31	159818.58	158177.26	155955.86
G 25.0	155325.46	155567.81	155325.46	154592.42	153571.59	152677.25	150527.23	147608.14	145611.39	141897.55
G 30.0	153660.89	154069.80	153660.89	152188.59	148594.14	144605.05	138131.98	130864.26	127329.13	124935.82
G 35.0	129362.50	129841.04	129362.50	128056.86	125632.07	124514.33	123811.84	122709.48	119865.07	108770.58
G 40.0	123894.35	123535.19	123894.35	123103.81	120550.22	115035.39	101218.08	79959.39	57962.25	36474.11
G 45.0	88008.30	89770.68	88008.30	79858.92	64943.80	47994.13	30554.22	16610.74	11102.87	9695.76
G 50.0	23190.77	24947.64	23190.77	19824.10	16060.71	14688.06	13727.17	12358.45	11672.18	10919.90
G 55.0	14582.78	15683.15	14582.78	13716.67	13101.38	12616.67	12552.20	12698.91	13016.46	12022.17
G 60.0	12089.15	12859.86	12089.15	11770.92	11740.67	11444.85	11246.05	11164.80	10682.94	9528.13
G 65.0	9984.00	10536.36	9984.00	9454.80	8901.18	8241.90	7541.34	6903.35	6366.05	5708.02
G 70.0	6464.28	6625.08	6464.28	6287.06	6057.56	5739.85	5373.29	4981.28	4544.06	4009.94
G 75.0	5610.52	5733.02	5610.52	5474.41	5294.24	5037.08	4722.26	4283.32	3630.47	2968.48
G 80.0	5801.63	6020.90	5801.63	5585.81	5324.29	4936.33	4423.58	3822.67	3178.39	2513.44
G 85.0	7739.31	7899.93	7739.31	7383.11	6781.76	6037.94	5280.80	4537.12	3761.82	3048.47
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 10.9 Tight Tilting Angle:0°

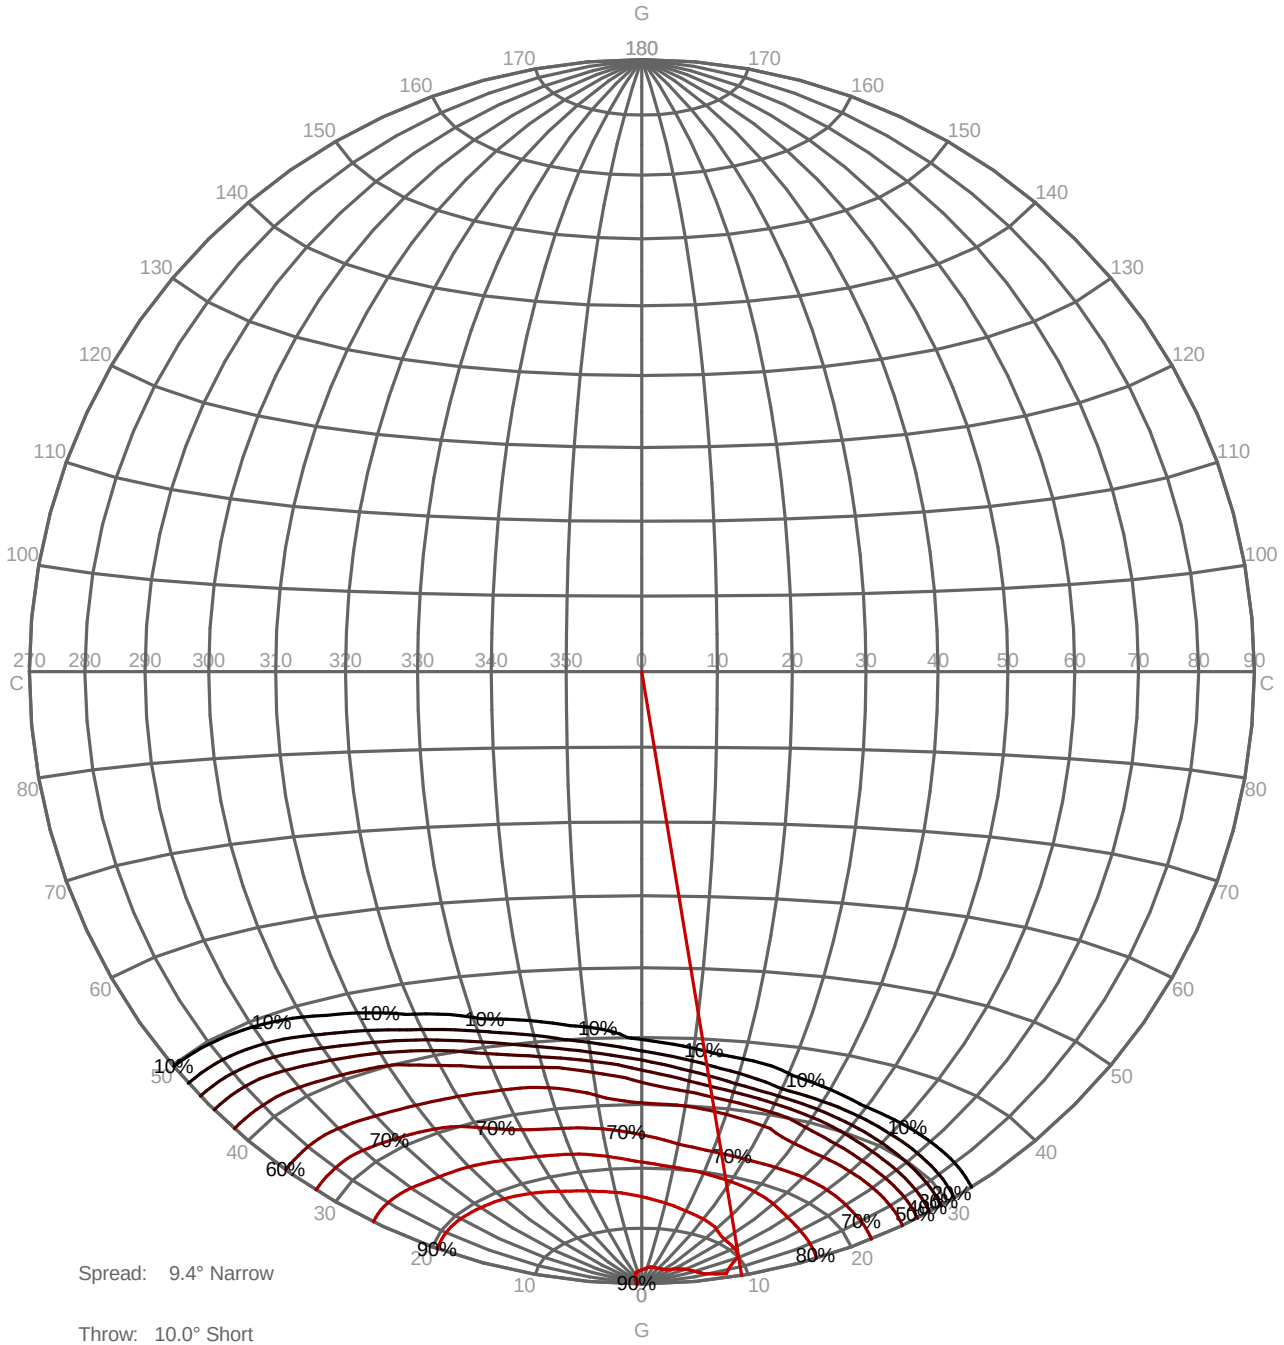

Spread: 9.4° Narrow


Throw: 10.0° Short

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K

Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

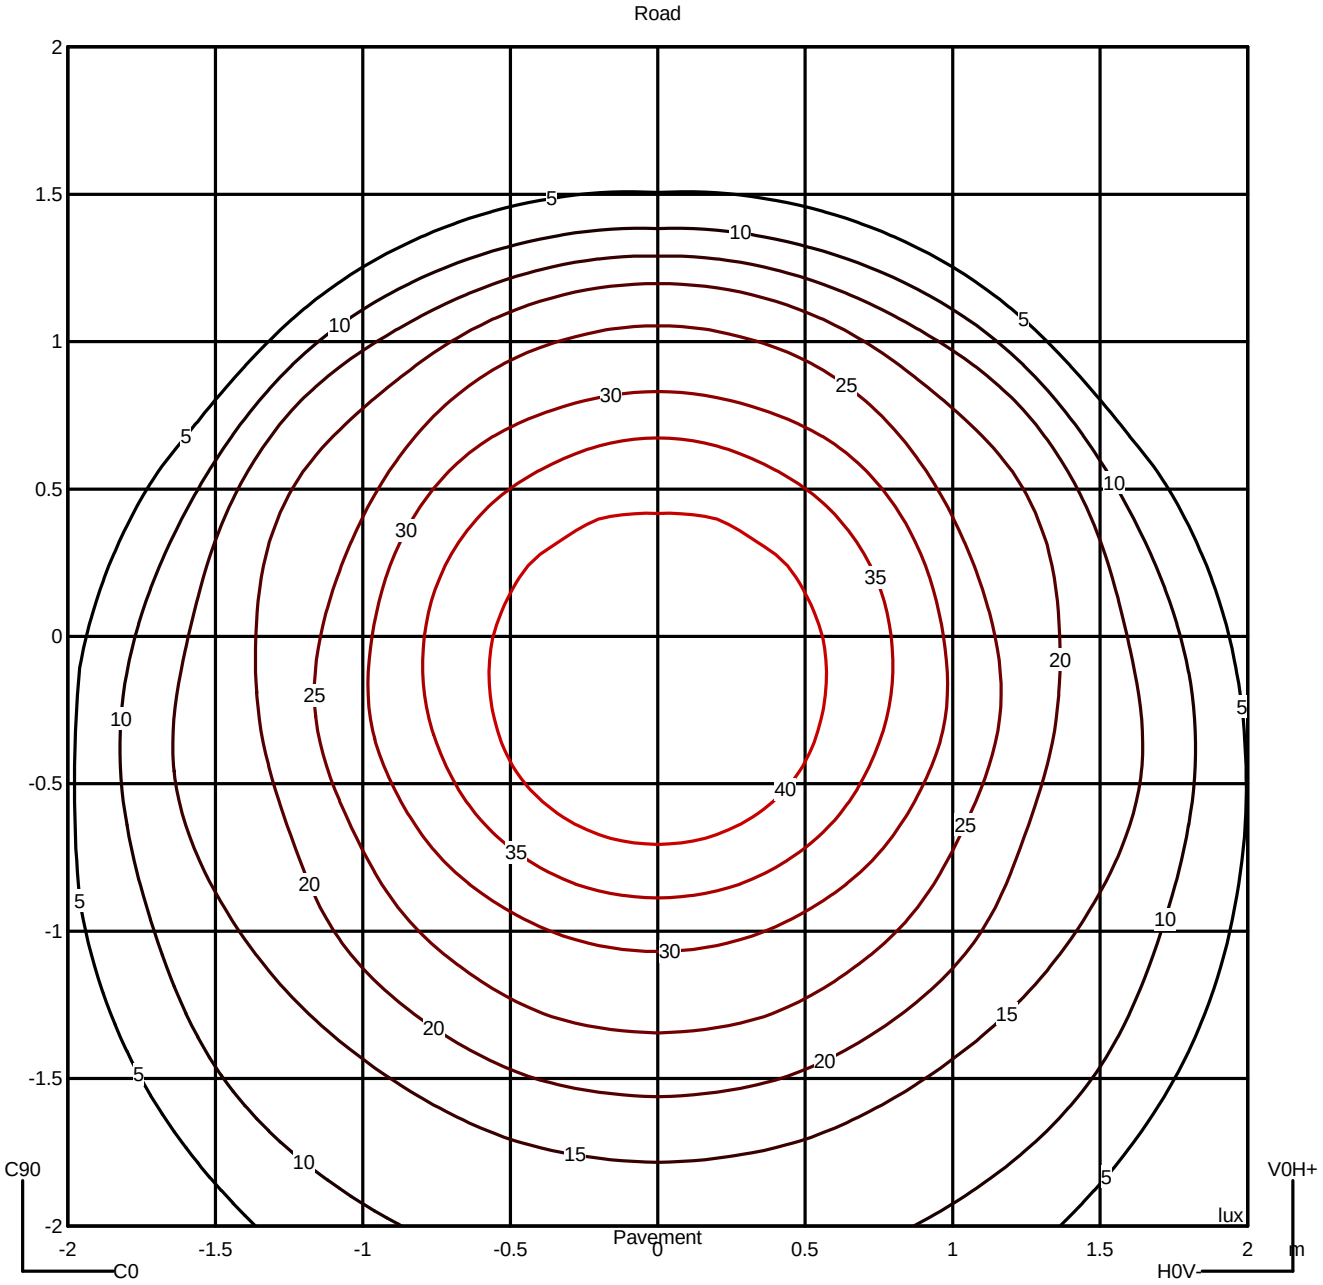

Luminaire
Code PX-0361-NEG
Name Foco 1 x led COB 5.7W 4000K
Measurem.
Code PX-0144-NEG
Name Foco 1 x led COB 5.7W 4000K


Luminaire Flux	298.38 lm	Luminaire Power	7.00 W	Efficacy	42.63 lm/W	Efficiency	100.00%
Lamps Flux	298.38 lm	Maximum value	973.80 cd/klm	Position	C=270.00 G=10.00	CG	Sym. on planes 270-90

Average Luminance [cd/m²]


	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	8735	9977	10409	7534	4936	3346	2380	1860	2450	---
90.0°	5702	8298	5524	2397	636	224	430	865	2162	---

Flush mounted or longitudinal view

		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

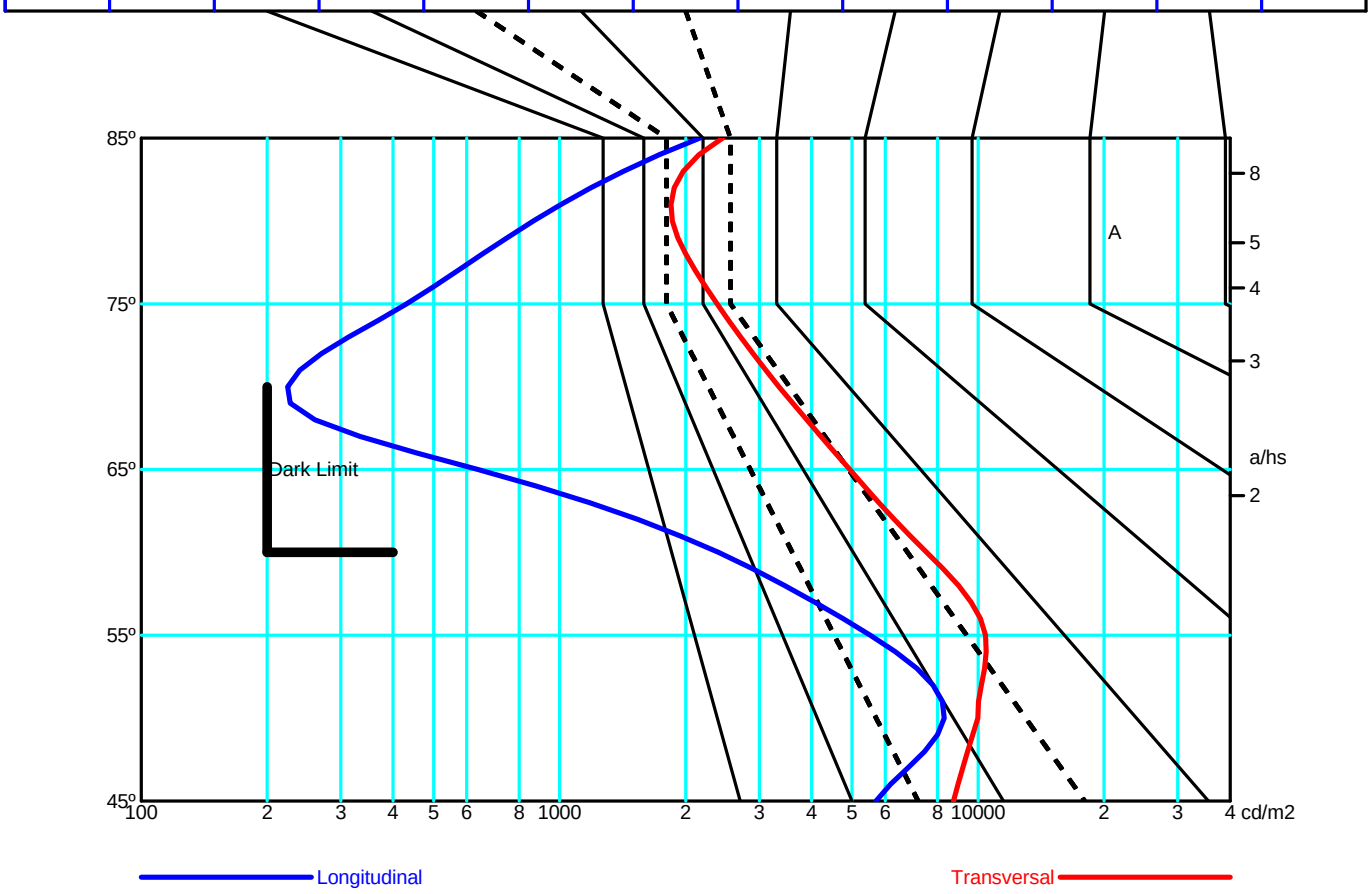

PX-0361

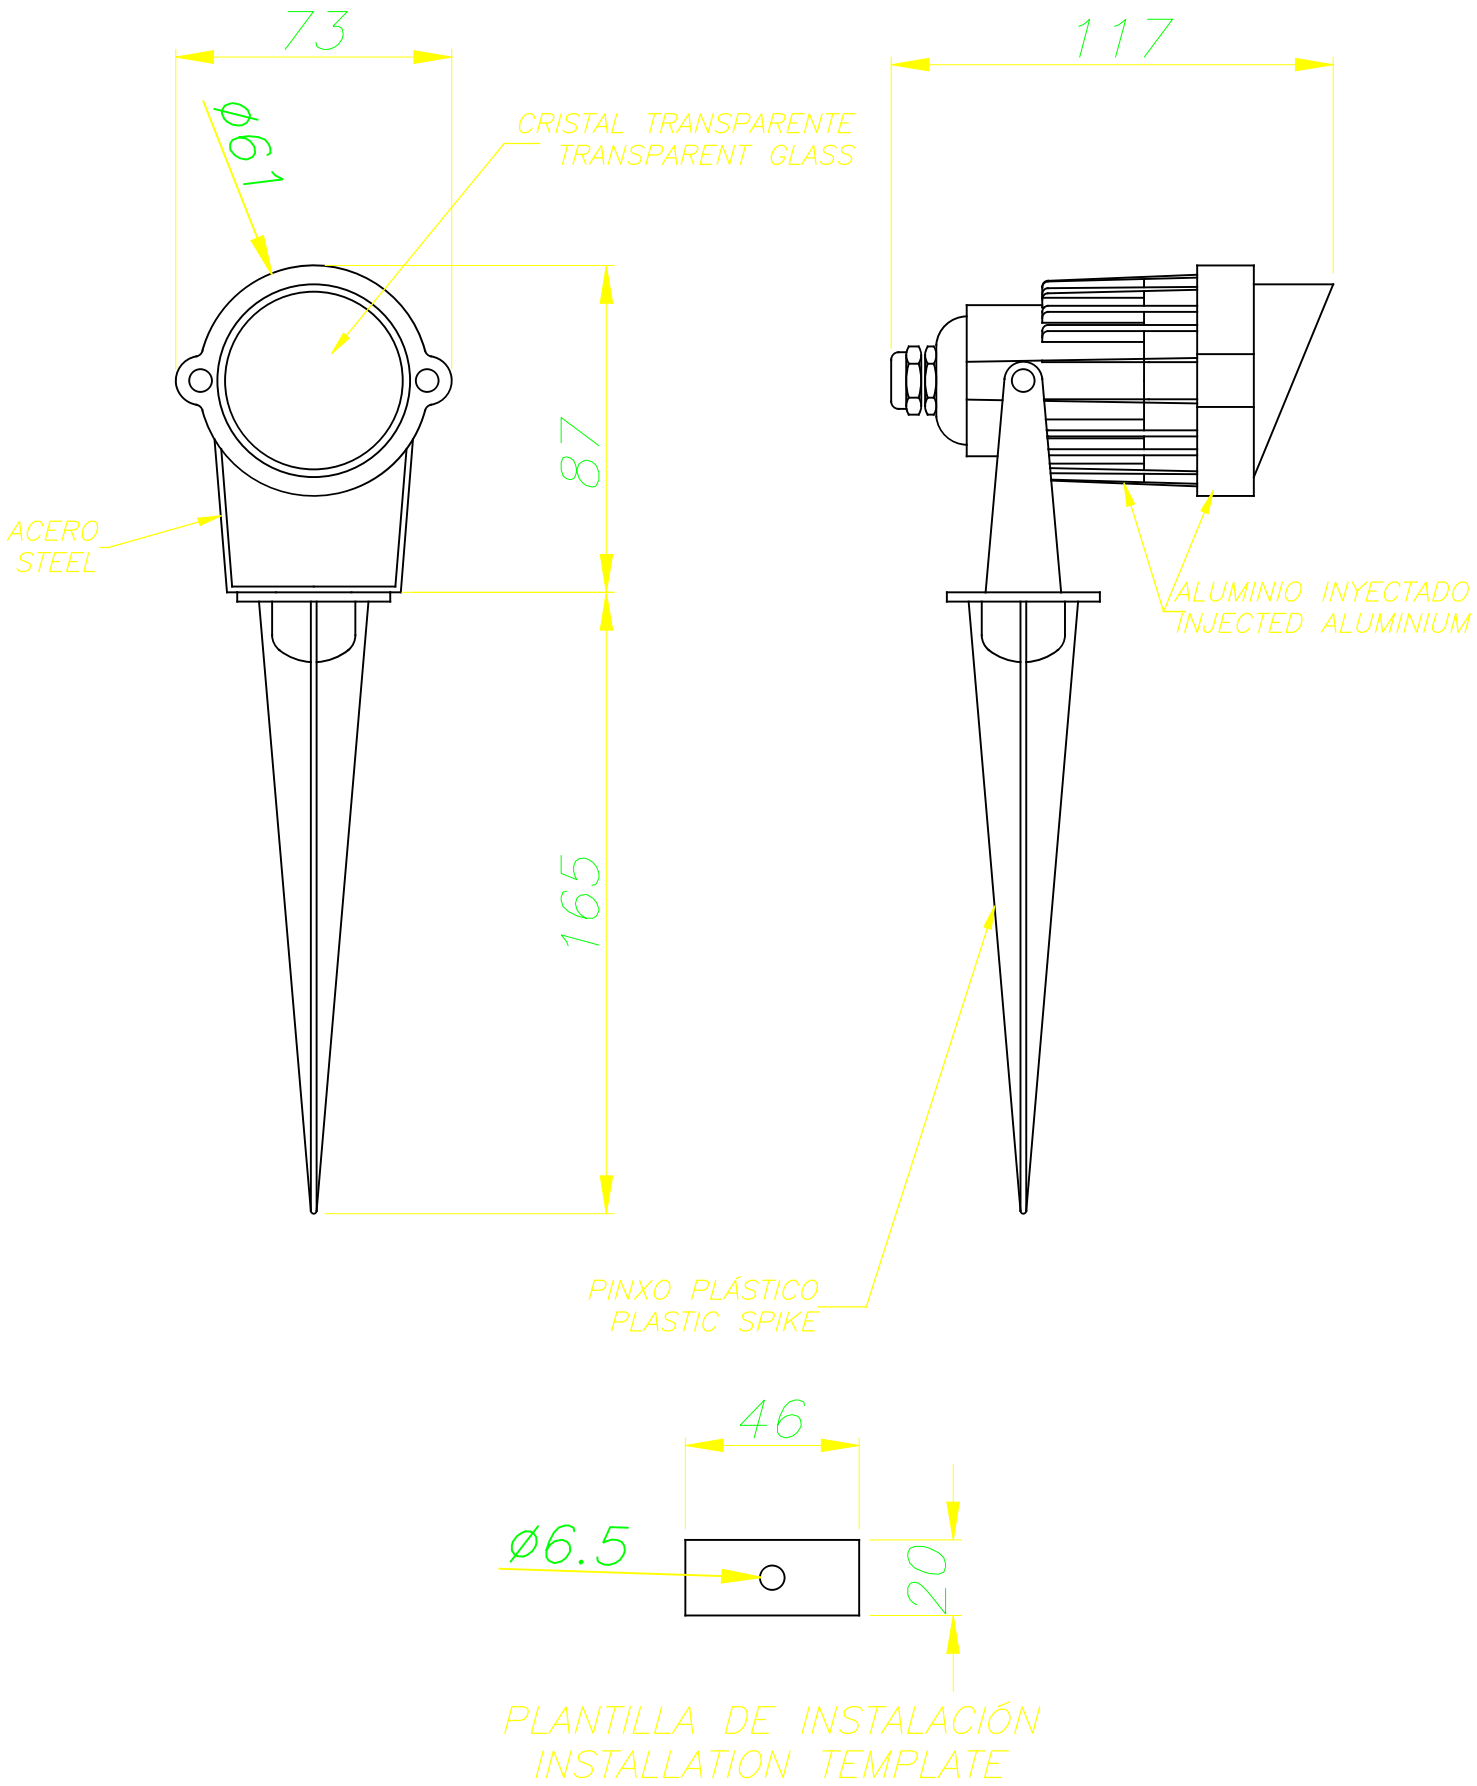

21-09-16

Minimal

PX-0144 PX-0361



