

TECHNICAL FEATURES



Luminaire total power : 15W

Real lumens : 527

Real lm/W : 35

Structure material : Aluminium

Structure finish : Gold

Recommended light bulb : E27


Voltage / frequency : 100-240V ~ 50/60Hz

Warranty : 3 Years

Easily recyclable luminaire

LUMINOTECHNIC FEATURES

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
E27	1	Max. power 15W	-




LOGISTICS

Net weight (kg): 0.31

Packaged weight (kg): 0.42

Packaging: 110mm x 110mm x 100mm



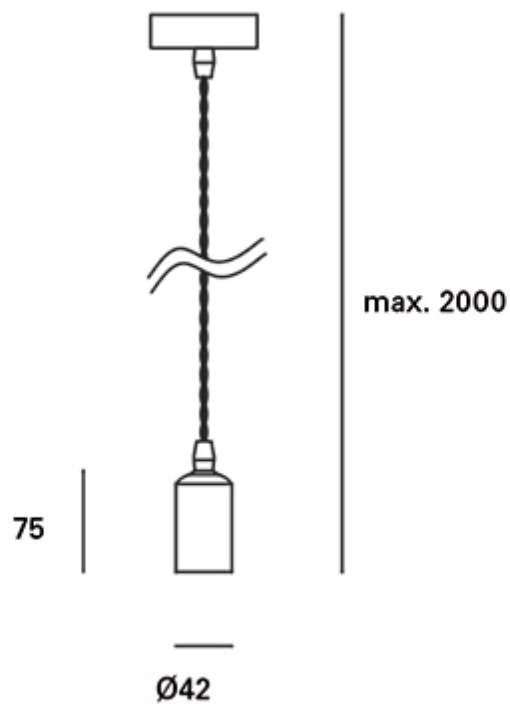

Luminaire


Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measurem.


Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	60 mm 60 mm	Height Height	270 mm 70 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.002827 m2 0.004200 m2 0.004200 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.004200 m2 0.004200 m2 0.004759 m2	
Coordinate system Date Measurement Distance		CG 30-03-2016 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 180 527.00 lm	
Operator Temperature Humidity Notes		Asselum T2 25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell			

Luminaire Lamps						
Line		Code	Name	Flux [lm]	Pow. [W]	Q.ty
		252026	252026	527.00	42.00	1
C.I.E.	17 43 71 52 100		D DIN 5040	C11		
F UTE	0.52 J + 0.48 T		B NBN	BZ 9		



ULOR 47.63 %
DLOR 52.32 %
RN 47.65 %

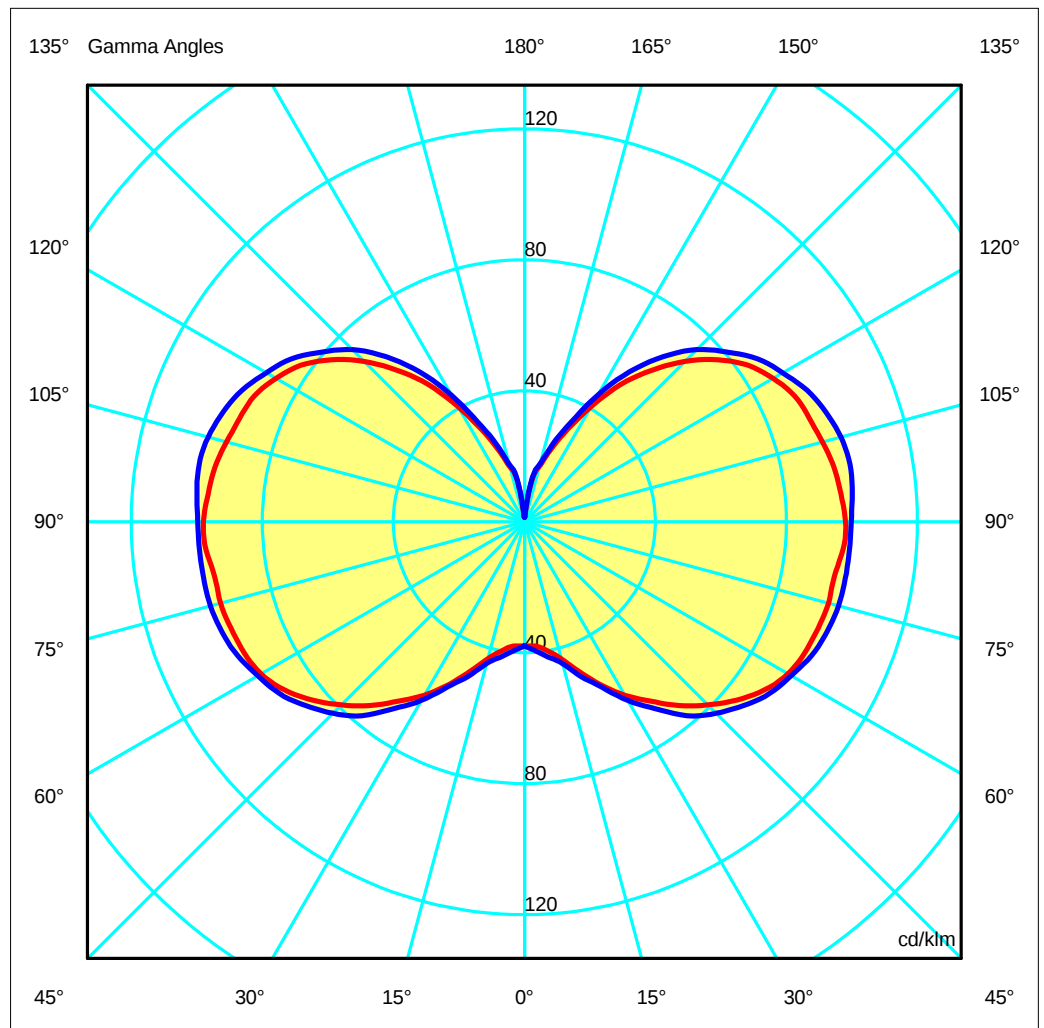

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measurement

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	37.84	37.84	37.84	37.84	37.84	37.84	37.84
G 5.0	38.08	38.11	38.44	38.10	38.10	38.64	39.58
G 10.0	39.93	39.85	40.16	39.87	39.96	40.74	41.92
G 15.0	43.31	42.76	43.13	42.77	42.94	44.25	44.80
G 20.0	48.56	47.44	48.14	47.58	47.60	48.90	50.18
G 25.0	54.83	53.61	54.07	53.34	52.73	55.11	55.67
G 30.0	61.10	59.85	60.82	59.49	59.52	62.13	63.01
G 35.0	66.82	66.33	67.16	66.21	66.13	69.56	69.66
G 40.0	73.20	72.12	73.79	73.09	73.14	76.21	77.24
G 45.0	79.06	78.11	78.90	78.61	78.85	82.18	82.69
G 50.0	84.63	83.62	83.36	83.23	83.36	86.77	87.31
G 55.0	89.50	87.99	87.10	87.61	87.12	90.22	91.38
G 60.0	92.82	90.94	89.80	90.94	89.99	93.59	94.00
G 65.0	94.48	92.62	91.40	93.13	92.82	95.44	96.65
G 70.0	95.30	93.33	91.95	94.17	94.37	96.48	98.25
G 75.0	96.06	94.10	92.50	95.08	95.08	97.11	99.23
G 80.0	96.03	95.03	93.02	95.83	95.74	97.42	99.46
G 85.0	97.60	96.49	93.56	97.11	96.08	98.13	99.58
G 90.0	98.00	97.34	93.82	98.00	96.50	98.58	99.75
G 95.0	96.97	96.89	93.28	97.25	96.47	98.96	100.41
G100.0	95.95	95.31	92.18	95.78	96.05	98.85	100.87
G105.0	94.17	93.81	90.81	94.10	94.77	97.85	100.00
G110.0	92.54	91.86	88.94	92.22	92.67	95.96	97.94
G115.0	91.02	89.94	86.90	90.27	90.27	93.66	95.14
G120.0	87.62	86.01	83.31	86.40	86.42	90.01	91.03
G125.0	83.35	81.15	78.78	81.47	82.43	85.19	86.84
G130.0	77.00	75.20	72.94	75.13	76.56	79.30	80.71
G135.0	69.34	68.14	66.45	68.34	70.23	72.04	74.46
G140.0	60.43	59.97	59.34	60.76	61.81	63.82	65.86
G145.0	51.22	50.34	50.43	51.13	52.60	53.93	55.97
G150.0	40.69	41.21	41.05	41.26	42.16	43.09	44.79
G155.0	31.20	30.97	31.19	31.24	31.58	32.90	33.64
G160.0	23.58	23.61	23.50	23.52	23.29	23.88	25.33
G165.0	17.60	17.19	17.44	17.30	17.24	18.05	18.33
G170.0	12.93	11.72	11.54	11.09	12.71	12.92	13.76
G175.0	1.69	4.11	1.47	3.23	1.54	4.08	1.63
G180.0	1.38	1.38	1.38	1.38	1.38	1.38	1.38

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measur.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27



Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Diam=60mm

C Halfplanes

180.0 — 0.0

270.0 — 90.0

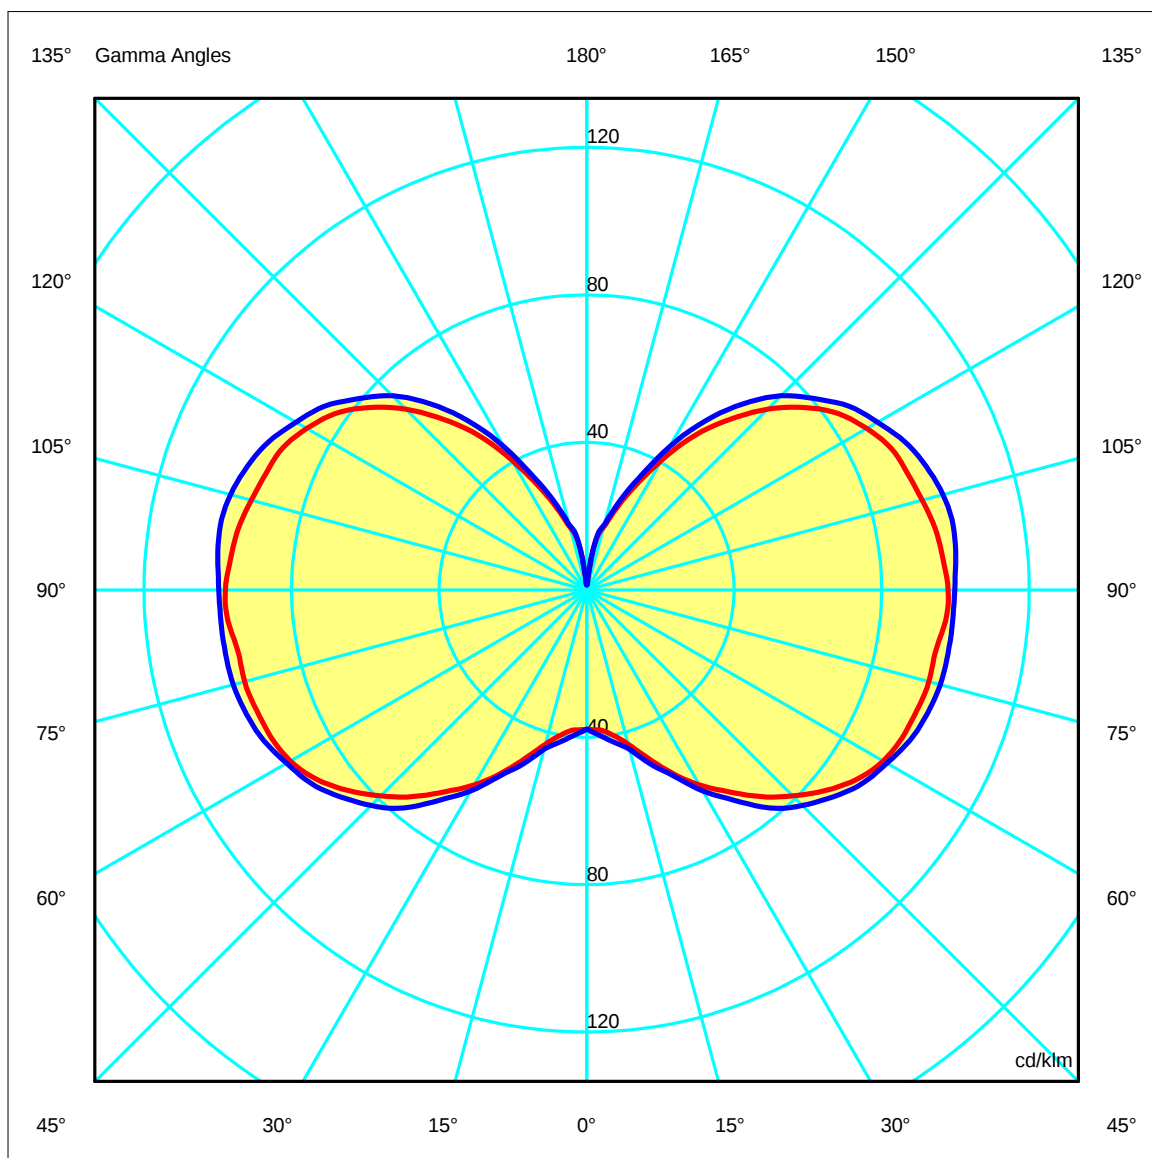

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measur.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Gamma 0-180 beyond limit of 89 degrees

Gamma 0-180 beyond limit of 89 degrees

Gamma 0-180 beyond limit of 89 degrees

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measur.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.9	17.9	17.8	18.8	20.1	17.0	18.0	17.9	18.9	20.1
x=2H y=3H	19.7	20.6	20.6	21.5	22.9	19.9	20.8	20.8	21.7	22.9
x=2H y=4H	21.1	22.0	22.0	22.9	24.3	21.3	22.2	22.2	23.1	24.3
x=2H y=6H	22.5	23.3	23.4	24.3	25.7	22.7	23.5	23.6	24.5	25.7
x=2H y=8H	23.2	24.0	24.1	24.9	26.4	23.4	24.2	24.3	25.1	26.4
x=2H y=12H	23.9	24.6	24.8	25.6	27.0	24.1	24.8	25.0	25.8	27.0
x=4H y=2H	17.9	18.8	18.8	19.7	21.0	18.0	18.9	18.9	19.8	21.0
x=4H y=3H	20.8	21.5	21.7	22.5	23.9	20.9	21.7	21.9	22.6	23.9
x=4H y=4H	22.3	23.0	23.2	23.9	25.4	22.5	23.2	23.4	24.1	25.4
x=4H y=6H	23.8	24.5	24.8	25.4	26.9	24.0	24.6	25.0	25.6	26.9
x=4H y=8H	24.6	25.2	25.6	26.2	27.7	24.8	25.4	25.8	26.4	27.7
x=4H y=12H	25.4	25.9	26.4	26.9	28.4	25.6	26.1	26.6	27.1	28.4
x=8H y=4H	22.9	23.5	23.9	24.5	25.9	23.1	23.6	24.0	24.6	25.9
x=8H y=6H	24.7	25.2	25.7	26.2	27.6	24.8	25.3	25.8	26.3	27.6
x=8H y=8H	25.6	26.0	26.6	27.0	28.5	25.8	26.2	26.8	27.2	28.5
x=8H y=12H	26.6	26.9	27.6	28.0	29.5	26.7	27.1	27.7	28.1	29.5
x=12H y=4H	23.0	23.6	24.0	24.6	26.0	23.2	23.7	24.2	24.7	26.0
x=12H y=6H	24.9	25.3	25.9	26.3	27.8	25.0	25.5	26.1	26.5	27.8
x=12H y=8H	25.9	26.3	26.9	27.3	28.8	26.1	26.4	27.1	27.5	28.8

Luminaire


Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measur.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Diam=60mm



C Halfplanes

180.0 ——— 0.0
270.0 ——— 90.0



Luminaire


Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measurem.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Luminance

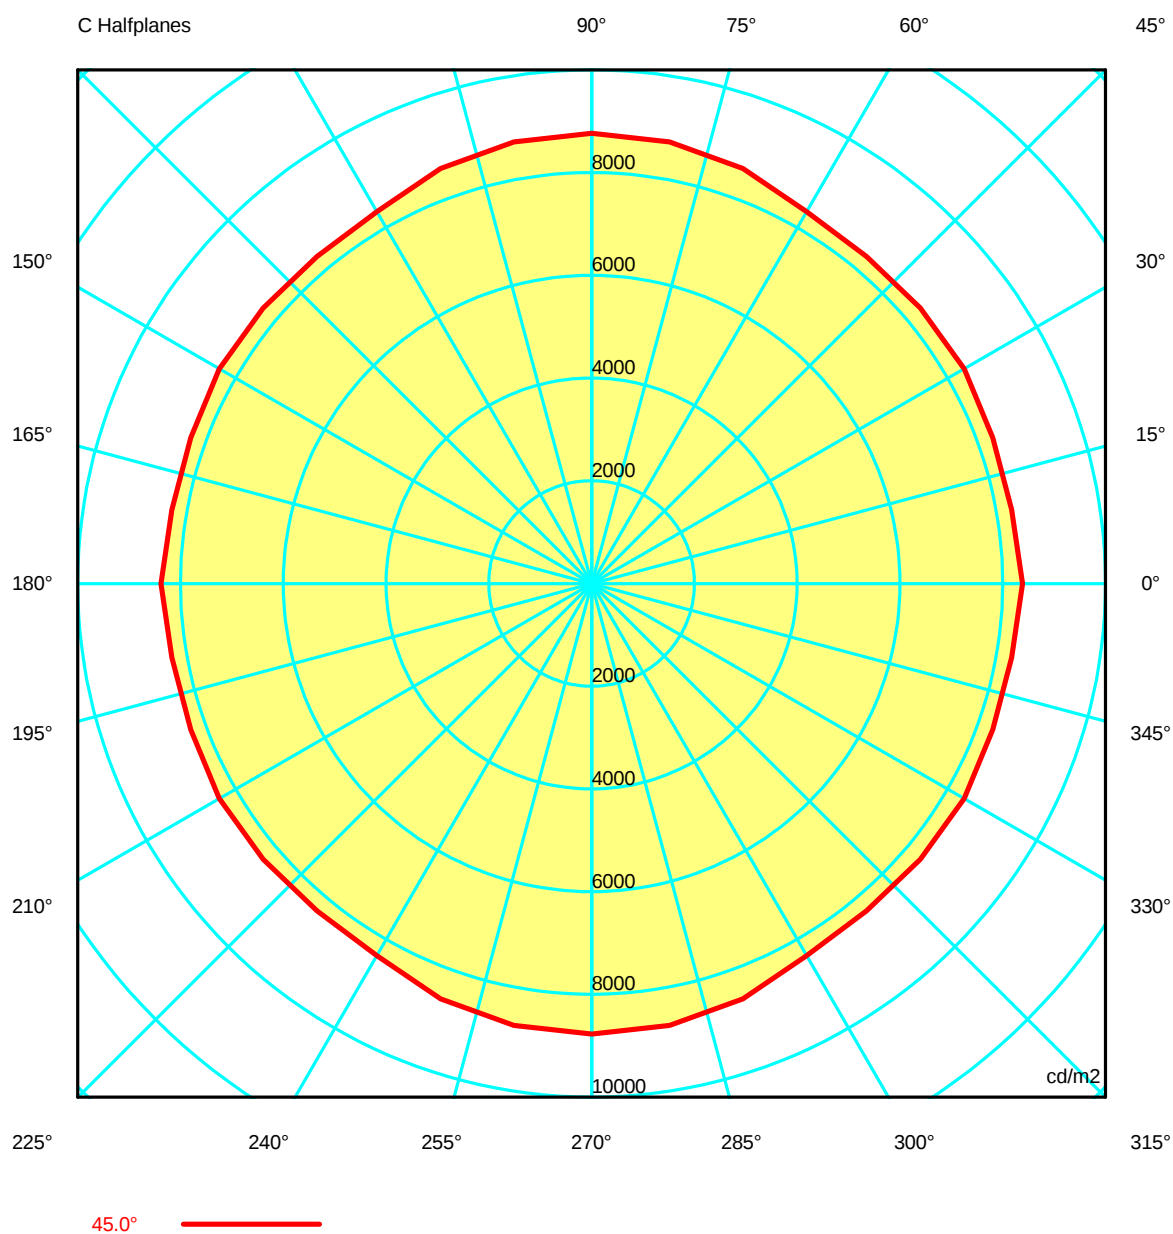

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measurment

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux			526.74 lm		Luminaire Power		42.00 W		Efficacy		12.54 lm/W		Efficiency		99.95%	
Lamps Flux			527.00 lm		Maximum value		100.87 cd/klm		Position		C=90.00 G=100.00		CG		Double Symmetrical	
Luminance cd/m2														Table 1/3		
C 0.00			C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00		
G 0.0	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96
G 5.0	6306.17	6308.96	6332.02	6366.12	6332.77	6297.88	6308.85	6360.04	6446.33	6554.57	6446.33	6360.04	6308.85	6306.17	6308.96	6308.85
G 10.0	5989.71	5972.40	5993.84	6024.41	5998.14	5972.21	5993.30	6062.46	6166.59	6288.62	6166.59	6062.46	5993.30	5989.71	5972.40	5993.84
G 15.0	5978.99	5912.09	5915.53	5953.81	5926.68	5892.77	5927.25	6048.24	6147.24	6184.58	6147.24	6048.24	5927.25	5978.99	5912.09	5915.53
G 20.0	6252.50	6128.09	6129.54	6198.25	6150.24	6106.46	6128.63	6232.68	6354.39	6460.71	6354.39	6232.68	6106.46	6252.50	6128.09	6129.54
G 25.0	6662.00	6539.67	6523.08	6569.44	6530.49	6427.58	6406.59	6596.93	6719.40	6764.79	6719.40	6596.93	6427.58	6662.00	6539.67	6523.08
G 30.0	7079.21	6949.79	6968.56	7046.77	6957.42	6853.90	6897.00	7100.35	7258.82	7300.41	7258.82	7100.35	6897.00	7079.21	6949.79	6968.56
G 35.0	7452.60	7396.49	7428.44	7490.76	7436.68	7341.64	7376.23	7639.74	7762.34	7769.64	7762.34	7639.74	7376.23	7452.60	7396.49	7428.44
G 40.0	7929.33	7814.46	7863.19	7992.60	7942.51	7883.11	7922.03	8145.04	8322.03	8366.31	8322.03	8145.04	7922.03	7929.33	7814.46	7863.19
G 45.0	8385.20	8297.20	8303.98	8368.21	8347.84	8314.85	8362.42	8603.50	8733.67	8769.81	8733.67	8603.50	8362.42	8385.20	8297.20	8303.98
G 50.0	8858.49	8781.32	8743.86	8725.67	8723.95	8690.17	8725.33	8967.83	9101.90	9139.09	9101.90	8967.83	8725.33	8858.49	8781.32	8743.86
G 55.0	9317.81	9212.33	9113.15	9068.15	9114.18	9103.82	9069.77	9276.58	9463.86	9513.86	9463.86	9276.58	9069.77	9317.81	9212.33	9113.15
G 60.0	9684.88	9555.27	9423.10	9369.42	9467.42	9447.20	9389.31	9633.87	9779.74	9808.38	9779.74	9633.87	9389.31	9684.88	9555.27	9423.10
G 65.0	9955.62	9828.46	9688.39	9631.33	9762.19	9807.87	9780.90	9953.95	10124.52	10184.13	10124.52	9953.95	9780.90	9955.62	9828.46	9688.39
G 70.0	10221.41	10086.47	9928.72	9861.73	10022.98	10107.43	10121.38	10258.10	10422.36	10537.78	10422.36	10258.10	10121.38	10221.41	10086.47	9928.72
G 75.0	10572.29	10438.87	10262.17	10180.24	10372.42	10463.48	10463.51	10592.88	10773.47	10921.06	10773.47	10592.88	10463.51	10572.29	10438.87	10262.17
G 80.0	10937.12	10889.85	10717.63	10594.09	10806.92	10940.93	10904.30	11009.06	11177.49	11327.79	11177.49	11009.06	10904.30	10937.12	10889.85	10717.63
G 85.0	11610.00	11568.60	11323.23	11128.78	11417.70	11552.53	11428.57	11563.24	11752.32	11845.62	11752.32	11563.24	11428.57	11610.00	11568.60	11323.23
G 90.0	12297.02	12241.69	12025.03	11772.07	12132.29	12290.10	12108.37	12249.39	12448.60	12516.19	12448.60	12249.39	12108.37	12297.02	12241.69	12025.03

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measurment

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux			526.74 lm		Luminaire Power		42.00 W		Efficacy		12.54 lm/W		Efficiency		99.95%												
Lamps Flux			527.00 lm		Maximum value		100.87 cd/klm		Position		C=90.00 G=100.00		CG		Double Symmetrical												
Luminance cd/m2														Table 2/3													
C 130.00			C 140.00		C 150.00		C 160.00		C 170.00		C 180.00		C 190.00		C 200.00		C 210.00		C 220.00		C 230.00		C 240.00		C 250.00		
G 0.0	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96
G 5.0	6297.88	6332.77	6366.12	6332.02	6308.96	6306.17	6308.96	6332.02	6366.12	6332.77	6297.88	6308.85	6360.04														
G 10.0	5972.21	5998.14	6024.41	5993.84	5972.40	5989.71	5972.40	5993.84	6024.41	5998.14	5972.21	5993.30	6062.46														
G 15.0	5892.77	5926.68	5953.81	5915.53	5912.09	5978.99	5912.09	5915.53	5953.81	5926.68	5892.77	5927.25	6048.24														
G 20.0	6106.46	6150.24	6198.25	6129.54	6128.09	6252.50	6128.09	6129.54	6198.25	6150.24	6106.46	6128.63	6232.68														
G 25.0	6427.58	6530.49	6569.44	6523.08	6539.67	6662.00	6539.67	6523.08	6569.44	6530.49	6427.58	6406.59	6596.93														
G 30.0	6853.90	6957.42	7046.77	6968.56	6949.79	7079.21	6949.79	6968.56	7046.77	6957.42	6853.90	6897.00	7100.35														
G 35.0	7341.64	7436.68	7490.76	7428.44	7396.49	7452.60	7396.49	7428.44	7490.76	7436.68	7341.64	7376.23	7639.74														
G 40.0	7883.11	7942.51	7992.60	7863.19	7814.46	7929.33	7814.46	7863.19	7992.60	7942.51	7883.11	7922.03	8145.04														
G 45.0	8314.85	8347.84	8368.21	8303.98	8297.20	8385.20	8297.20	8303.98	8368.21	8347.84	8314.85	8362.42	8603.50														
G 50.0	8690.17	8723.95	8725.67	8743.86	8781.32	8858.49	8781.32	8743.86	8725.67	8723.95	8690.17	8725.33	8967.83														
G 55.0	9103.82	9114.18	9068.15	9113.15	9212.33	9317.81	9212.33	9113.15	9068.15	9114.18	9103.82	9069.77	9276.58														
G 60.0	9447.20	9467.42	9369.42	9423.10	9555.27	9684.88	9555.27	9423.10	9369.42	9467.42	9447.20	9389.31	9633.87														
G 65.0	9807.87	9762.19	9631.33	9688.39	9828.46	9955.62	9828.46	9688.39	9631.33	9762.19	9807.87	9780.90	9953.95														
G 70.0	10107.43	10022.98	9861.73	9928.72	10086.47	10221.41	10086.47	9928.72	9861.73	10022.98	10107.43	10121.38	10258.10														
G 75.0	10463.48	10372.42	10180.24	10262.17	10438.87	10572.29	10438.87	10262.17	10180.24	10372.42	10463.48	10463.51	10592.88														
G 80.0	10940.93	10806.92	10594.09	10717.63	10889.85	10937.12	10889.85	10717.63	10594.09	10806.92	10940.93	10904.30	11009.06														
G 85.0	11552.53	11417.70	11128.78	11323.23	11568.60	11610.00	11568.60	11323.23	11128.78	11417.70	11552.53	11428.57	11563.24														
G 90.0	12290.10	12132.29	11772.07	12025.03	12241.69	12297.02	12241.69	12025.03	11772.07	12132.29	12290.10	12108.37	12249.39														

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Measur.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG Double Symmetrical	

Luminance cd/m2 Table 3/3

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96
G 5.0	6446.33	6554.57	6446.33	6360.04	6308.85	6297.88	6332.77	6366.12	6332.02	6308.96
G 10.0	6166.59	6288.62	6166.59	6062.46	5993.30	5972.21	5998.14	6024.41	5993.84	5972.40
G 15.0	6147.24	6184.58	6147.24	6048.24	5927.25	5892.77	5926.68	5953.81	5915.53	5912.09
G 20.0	6354.39	6460.71	6354.39	6232.68	6128.63	6106.46	6150.24	6198.25	6129.54	6128.09
G 25.0	6719.40	6764.79	6719.40	6596.93	6406.59	6427.58	6530.49	6569.44	6523.08	6539.67
G 30.0	7258.82	7300.41	7258.82	7100.35	6897.00	6853.90	6957.42	7046.77	6968.56	6949.79
G 35.0	7762.34	7769.64	7762.34	7639.74	7376.23	7341.64	7436.68	7490.76	7428.44	7396.49
G 40.0	8322.03	8366.31	8322.03	8145.04	7922.03	7883.11	7942.51	7992.60	7863.19	7814.46
G 45.0	8733.67	8769.81	8733.67	8603.50	8362.42	8314.85	8347.84	8368.21	8303.98	8297.20
G 50.0	9101.90	9139.09	9101.90	8967.83	8725.33	8690.17	8723.95	8725.67	8743.86	8781.32
G 55.0	9463.86	9513.86	9463.86	9276.58	9069.77	9103.82	9114.18	9068.15	9113.15	9212.33
G 60.0	9779.74	9808.38	9779.74	9633.87	9389.31	9447.20	9467.42	9369.42	9423.10	9555.27
G 65.0	10124.52	10184.13	10124.52	9953.95	9780.90	9807.87	9762.19	9631.33	9688.39	9828.46
G 70.0	10422.36	10537.78	10422.36	10258.10	10121.38	10107.43	10022.98	9861.73	9928.72	10086.47
G 75.0	10773.47	10921.06	10773.47	10592.88	10463.51	10463.48	10372.42	10180.24	10262.17	10438.87
G 80.0	11177.49	11327.79	11177.49	11009.06	10904.30	10940.93	10806.92	10594.09	10717.63	10889.85
G 85.0	11752.32	11845.62	11752.32	11563.24	11428.57	11552.53	11417.70	11128.78	11323.23	11568.60
G 90.0	12448.60	12516.19	12448.60	12249.39	12108.37	12290.10	12132.29	11772.07	12025.03	12241.69

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27


Measur.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area Tilting Angle:0°

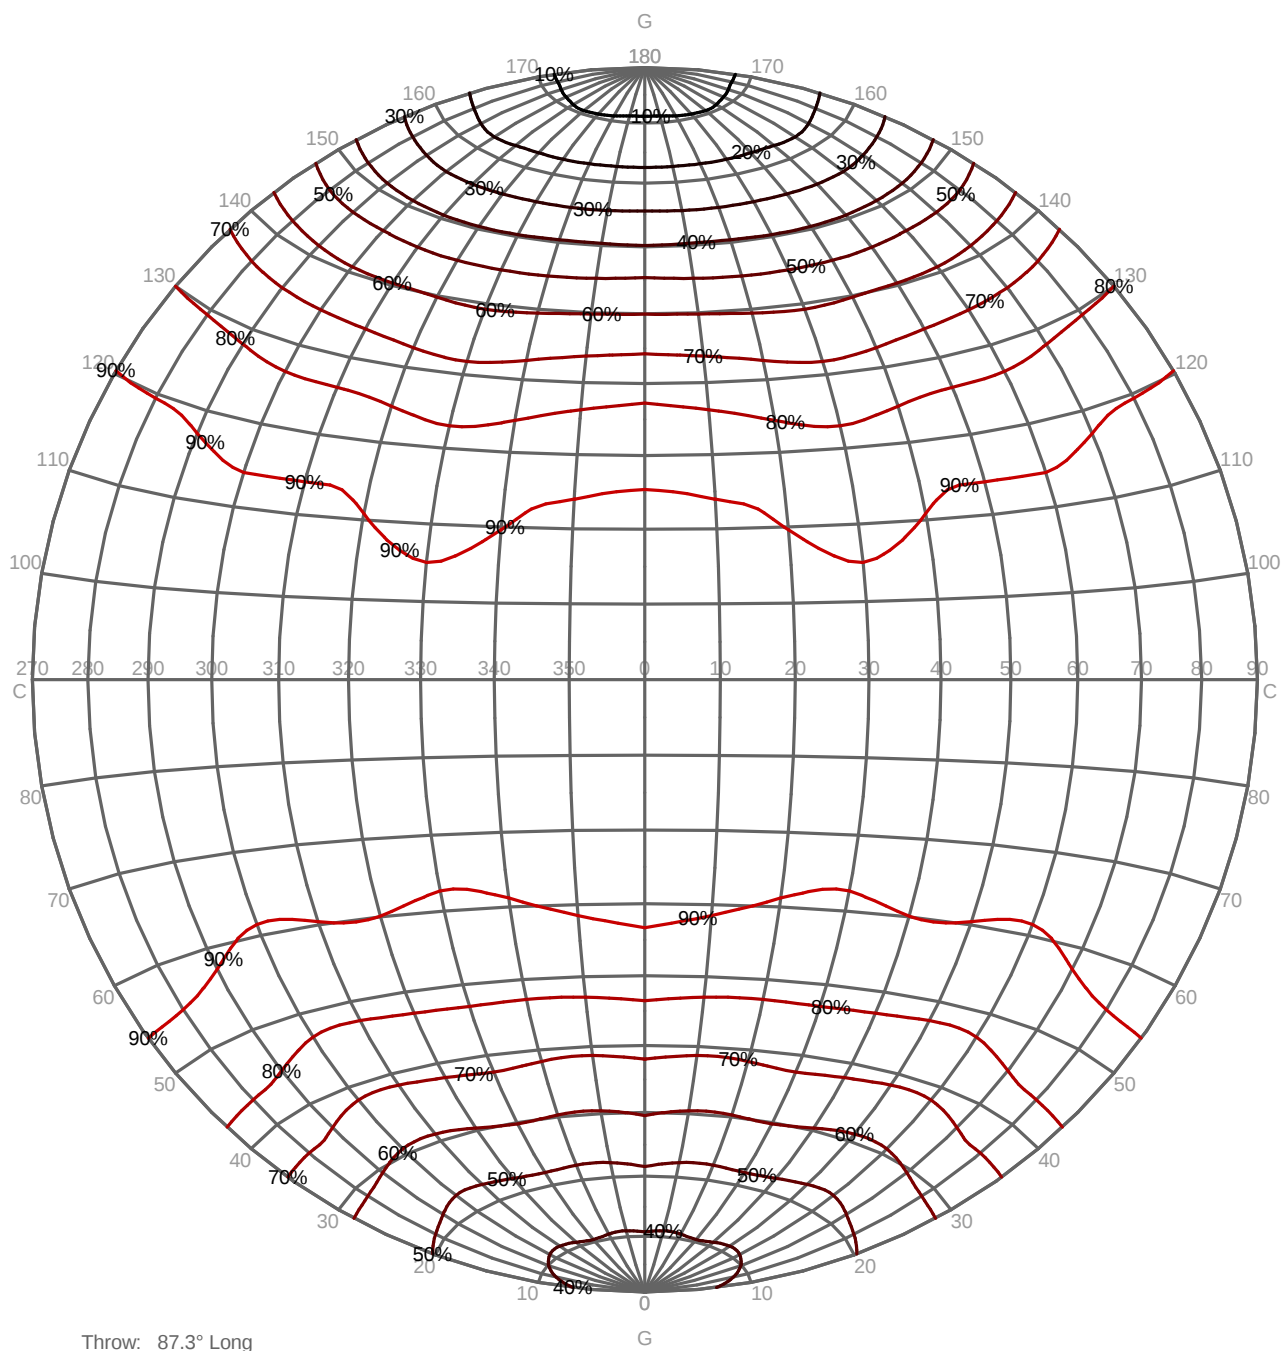

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27


Measurem.

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

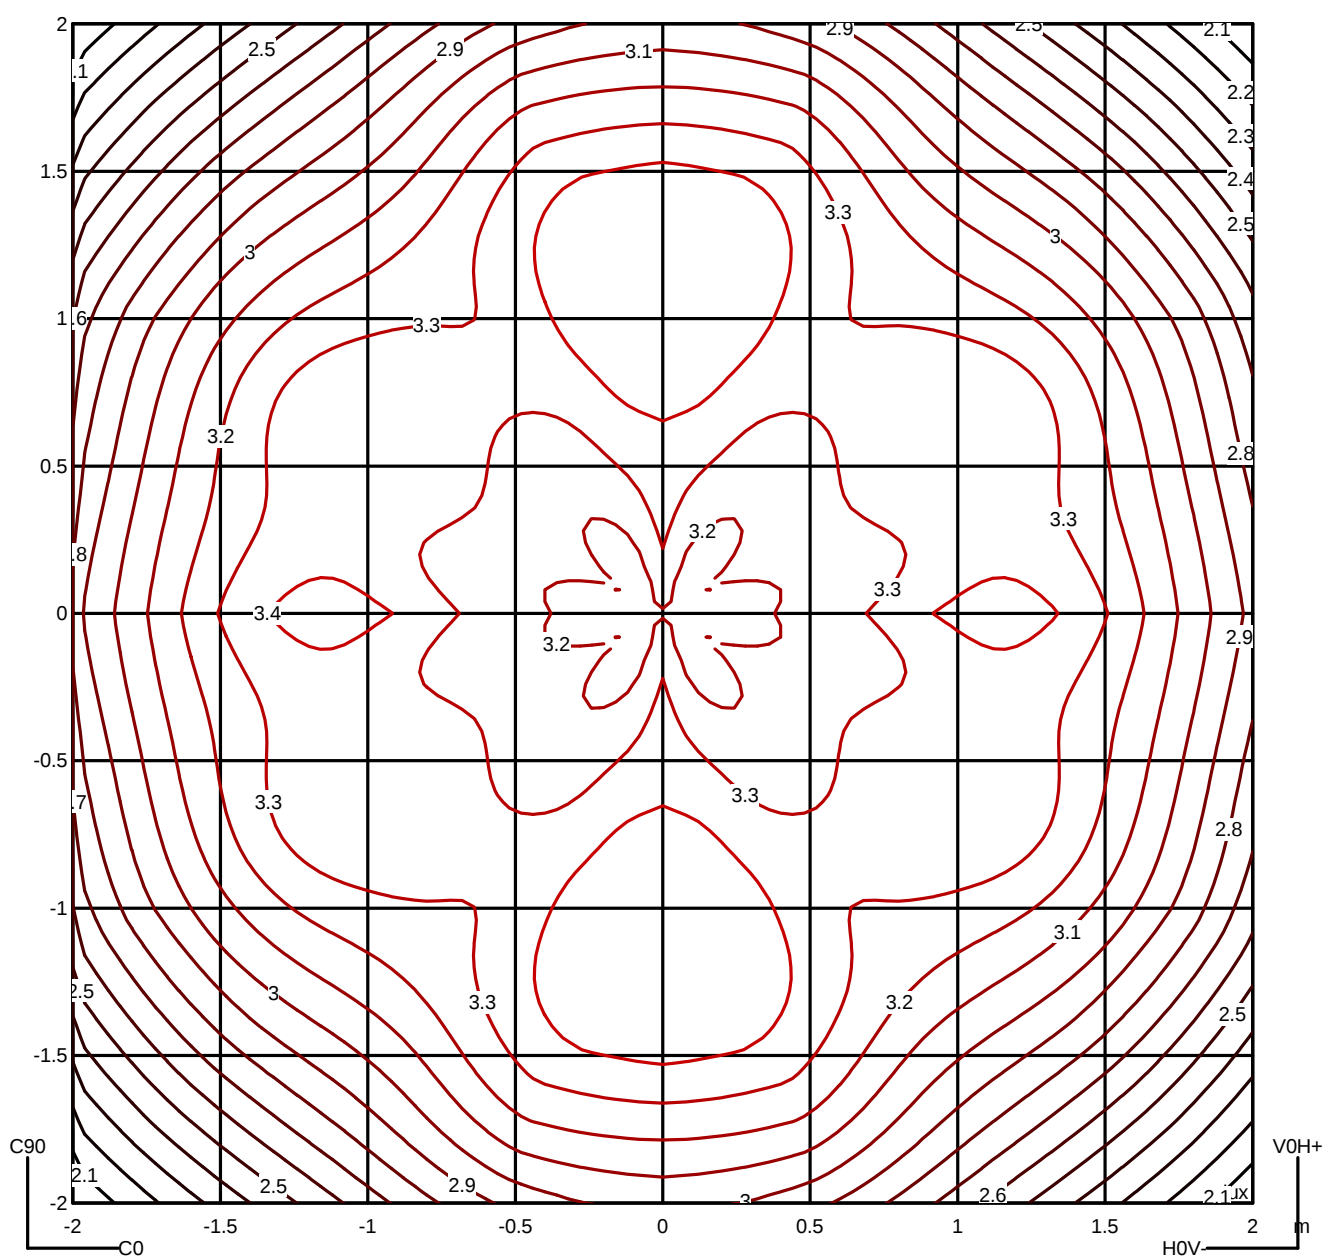

Luminaire

Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27


Measur.




Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27


Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

	Average Luminance [cd/m²]									
	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	8385	8858	9318	9685	9956	10221	10572	10937	11610	---
90.0°	8770	9139	9514	9808	10184	10538	10921	11328	11846	---

Flush mounted or transversal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

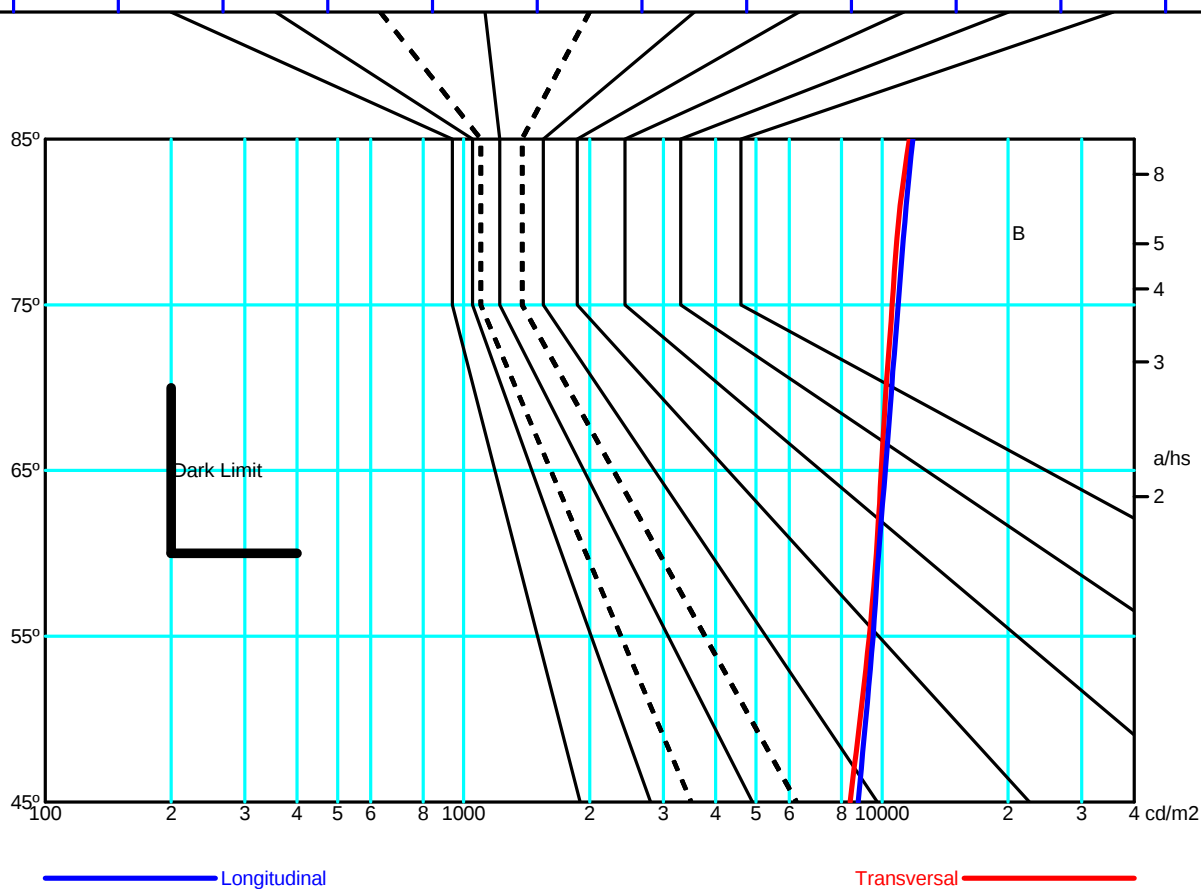

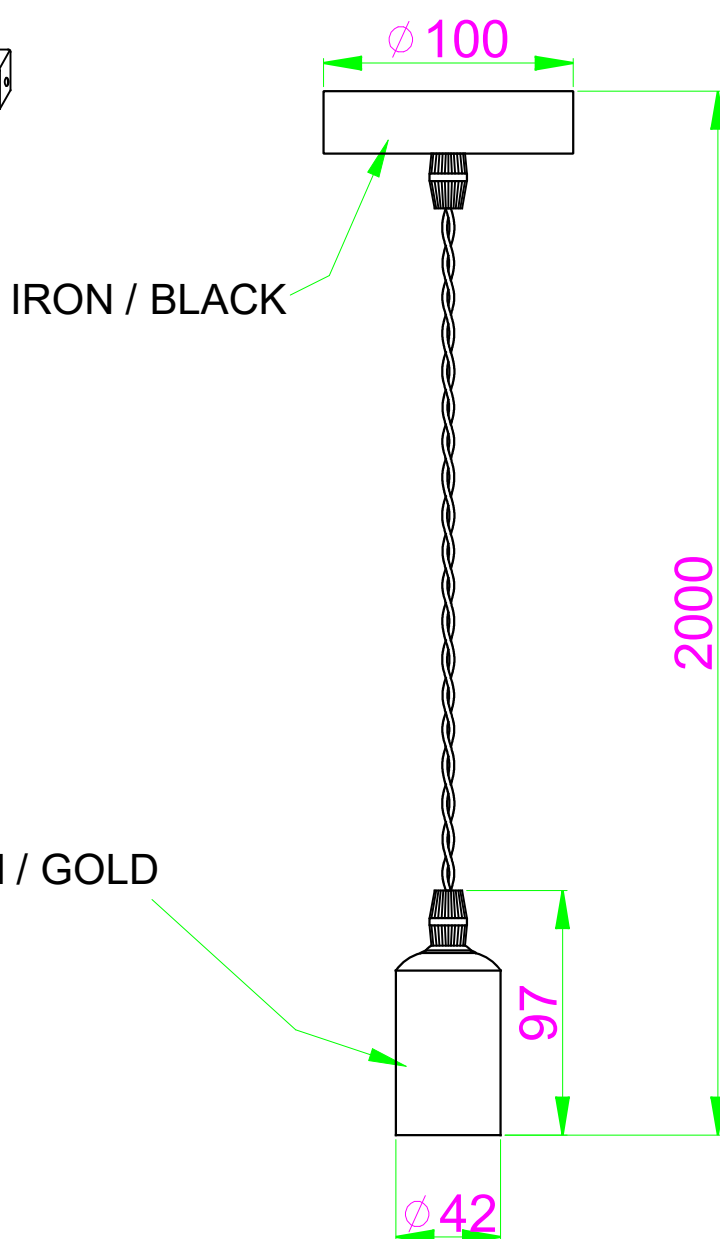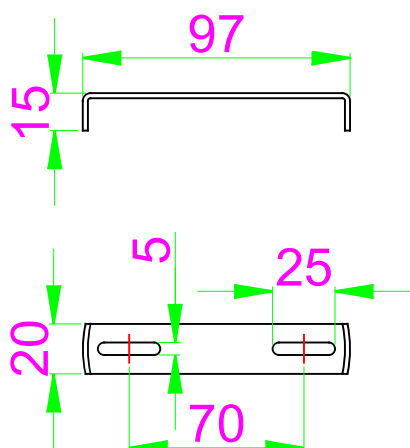



Dixie
DE-0267

FOR
LIGHT

