




Cube Small

LedsC4 Team

PX-0056-NEG

Surface-mounted wall light IP44 Cube Small GU10 16W Black

TECHNICAL FEATURES



IP44 IK03



Luminaire total power : 16W

Structure material : Steel

Structure finish : Black

Diffuser material : Glass

Diffuser finish : Transparent

Max. size of light bulb : 70/75 mm

Recommended light bulb : GU10



Voltage / frequency : 100-240V ~ 50/60Hz

Warranty : 5 Years

Easily recyclable luminaire

LUMINOTECHNIC FEATURES

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
GU10	2	Max. power 8W	-



LOGISTICS


Net weight (kg): 0.84

Packaged weight (kg): 0.97

Packaging: 110mm x 100mm x 230mm



12 Un

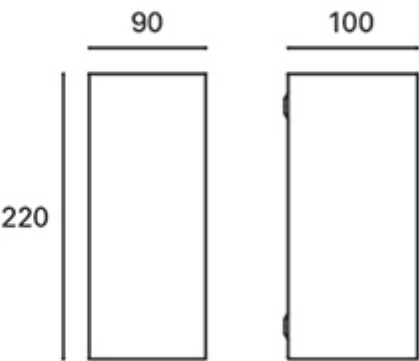

Luminaire


Code PX-0056-NEG
Name WALL FIXTURES

Measur.


Code PX-0056-NEG
Name WALL FIXTURES

Luminaire Flux	179.59 lm	Luminaire Power	63.80 W	Efficacy	2.81 lm/W	Efficiency	6.73%
Lamps Flux	2670.00 lm	Maximum value	60.79 cd/klm	Position	C=45.00 G=175.00	CG	Asymmetrical
Rectangular Luminaire		Length	90 mm	Width	100 mm	Height	220 mm
Rectangular Luminous Area		Length	90 mm	Width	100 mm	Height	219 mm
Horizontal Luminous Area		0.009000 m2		Emitting area on Plane 180°		0.019800 m2	
Emitting area on Plane 0°		0.019800 m2		Emitting area on Plane 270°		0.022000 m2	
Emitting area on Plane 90°		0.022000 m2		Glare area at 76°		0.021389 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		28-02-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2670.00 lm	
Operator				Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Line	Code	Luminaire Lamps	Flux [lm]	Pow. [W]	Q.ty
	11	Name 11	1335.00	31.90	2
C.I.E.	87 98 100 48 7	D DIN 5040	C62		
F UTE	0.03 A + 0.04 T	B NBN	BZ 1		




ULOR 3.51 %
DLOR 3.22 %
RN 52.15 %

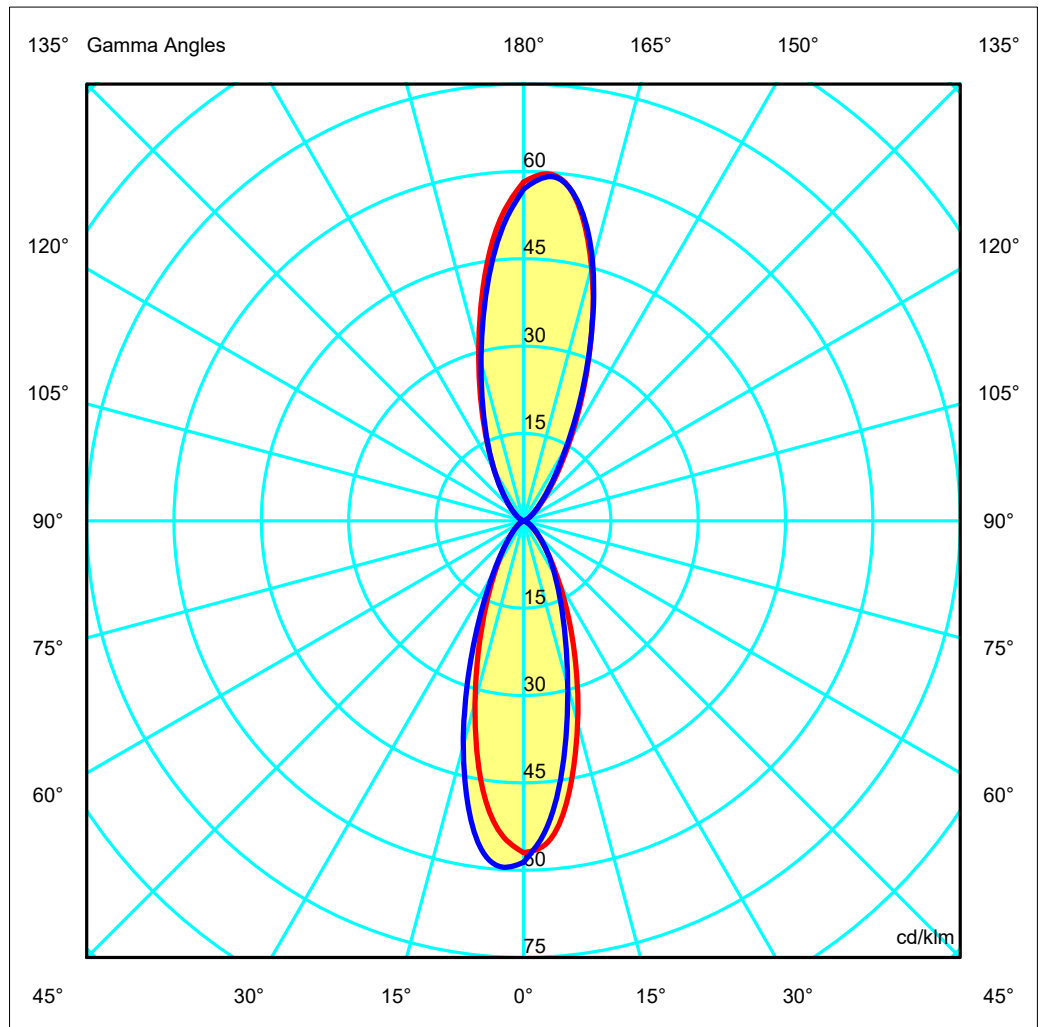



Luminaire
 Code PX-0056-NEG
 Name WALL FIXTURES
Measur.
 Code PX-0056-NEG
 Name WALL FIXTURES

Luminaire Flux	179.59 lm		Luminaire Power		63.80 W		Efficacy	2.81 lm/W		Efficiency		6.73%
Lamps Flux	2670.00 lm		Maximum value		60.79 cd/klm		Position	C=45.00 G=175.00		CG	Asymmetrical	
Luminous Intensity Table cd/klm Table 1/1												
	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00	C 105.00	C 120.00	C 135.00	C 150.00	C 165.00
G 0.0	56.98	56.76	57.13	56.98	57.87	57.16	58.63	56.52	57.51	56.68	57.94	57.46
G 5.0	54.72	51.87	52.73	50.15	51.85	49.22	51.66	49.25	51.25	49.25	51.81	50.57
G 10.0	46.26	41.95	42.93	39.19	40.96	37.76	40.48	38.45	40.95	38.63	41.81	40.25
G 15.0	35.92	31.45	32.11	28.66	29.99	27.25	29.26	27.77	30.04	28.13	31.01	29.70
G 20.0	26.22	22.48	23.14	20.59	21.52	19.47	20.79	19.57	21.21	19.84	22.00	20.80
G 25.0	18.27	15.70	16.47	14.89	15.63	14.21	14.97	14.04	15.13	14.06	15.36	14.12
G 30.0	12.29	10.78	11.75	10.95	11.60	10.45	10.94	10.18	10.94	10.08	10.67	9.43
G 35.0	8.16	7.30	8.31	8.09	8.64	7.60	7.92	7.33	7.97	7.22	7.29	6.23
G 40.0	5.39	4.90	5.79	5.85	6.30	5.42	5.62	5.18	5.73	5.11	4.96	4.11
G 45.0	3.57	3.30	3.96	4.09	4.48	3.81	3.93	3.61	4.04	3.54	3.36	2.73
G 50.0	2.38	2.22	2.70	2.81	3.12	2.66	2.75	2.49	2.79	2.42	2.26	1.83
G 55.0	1.59	1.49	1.82	1.89	2.14	1.84	1.92	1.70	1.89	1.61	1.52	1.20
G 60.0	1.03	0.97	1.19	1.23	1.42	1.24	1.30	1.13	1.24	1.03	0.97	0.75
G 65.0	0.61	0.56	0.73	0.74	0.90	0.76	0.83	0.68	0.76	0.59	0.56	0.39
G 70.0	0.27	0.24	0.37	0.35	0.48	0.38	0.44	0.31	0.36	0.23	0.22	0.10
G 75.0	0.00	0.00	0.06	0.03	0.12	0.05	0.10	0.00	0.03	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G110.0	0.28	0.22	0.34	0.25	0.29	0.17	0.22	0.15	0.25	0.21	0.28	0.17
G115.0	0.65	0.60	0.76	0.65	0.69	0.51	0.57	0.48	0.63	0.58	0.65	0.50
G120.0	1.14	1.08	1.32	1.18	1.21	0.96	1.01	0.91	1.11	1.06	1.12	0.90
G125.0	1.81	1.74	2.10	1.91	1.93	1.55	1.62	1.47	1.76	1.69	1.75	1.42
G130.0	2.79	2.69	3.28	3.00	2.99	2.40	2.48	2.27	2.70	2.61	2.64	2.13
G135.0	4.29	4.16	5.06	4.63	4.61	3.69	3.79	3.45	4.10	3.95	3.98	3.18
G140.0	6.63	6.44	7.85	7.16	7.15	5.71	5.91	5.30	6.27	5.93	5.96	4.76
G145.0	10.33	10.02	12.06	11.03	11.14	8.98	9.33	8.26	9.51	8.79	8.85	7.15
G150.0	15.99	15.51	18.19	16.72	17.28	14.28	14.82	12.99	14.28	12.85	13.01	10.72
G155.0	23.93	23.26	26.67	24.68	25.96	22.25	23.19	20.08	21.21	18.51	18.70	15.75
G160.0	34.07	33.21	37.21	35.03	37.01	32.93	34.07	29.76	30.47	26.36	26.45	22.60
G165.0	45.14	44.51	48.45	46.49	48.60	44.89	45.86	41.13	41.20	36.16	36.11	31.59
G170.0	54.80	54.54	57.40	56.31	57.45	54.82	55.14	51.41	51.09	46.61	46.49	41.94
G175.0	59.66	59.99	60.75	60.79	60.46	59.71	59.30	57.75	57.27	54.77	54.79	51.94
G180.0	58.19	59.03	57.54	58.70	56.87	58.10	56.96	58.08	57.43	57.94	58.32	58.33
	C 180.00	C 195.00	C 210.00	C 225.00	C 240.00	C 255.00	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00
G 0.0	56.98	56.76	57.13	56.98	57.87	57.16	58.63	56.52	57.51	56.68	57.94	57.46
G 5.0	52.84	55.11	54.99	57.23	57.26	58.88	59.13	57.97	57.79	58.62	58.06	58.47
G 10.0	43.64	47.52	46.78	50.76	49.60	53.18	52.06	52.44	51.44	53.91	51.82	52.97
G 15.0	32.13	36.39	35.37	39.67	37.96	41.90	39.91	41.96	40.86	44.51	41.81	42.94
G 20.0	22.02	25.57	24.74	28.24	26.31	29.36	27.28	29.70	28.91	33.18	30.70	31.71
G 25.0	14.51	16.99	16.44	18.93	17.14	18.98	17.13	19.27	18.96	22.78	21.11	21.84
G 30.0	9.36	10.97	10.71	12.28	10.75	11.66	10.38	11.87	11.92	14.93	14.05	14.49
G 35.0	6.01	7.07	6.88	7.82	6.70	7.11	6.32	7.31	7.46	9.65	9.15	9.43
G 40.0	3.91	4.57	4.45	4.99	4.19	4.41	3.94	4.55	4.72	6.19	5.93	6.13
G 45.0	2.57	2.97	2.87	3.18	2.64	2.76	2.48	2.90	3.01	4.00	3.85	4.00
G 50.0	1.71	1.96	1.86	2.03	1.67	1.74	1.57	1.85	1.94	2.57	2.50	2.63
G 55.0	1.10	1.27	1.17	1.27	1.01	1.07	0.95	1.15	1.22	1.65	1.61	1.73
G 60.0	0.67	0.78	0.68	0.74	0.56	0.60	0.52	0.67	0.72	1.01	0.99	1.10
G 65.0	0.32	0.40	0.31	0.35	0.22	0.26	0.20	0.31	0.34	0.55	0.54	0.64
G 70.0	0.03	0.09	0.01	0.05	0.00	0.00	0.00	0.04	0.05	0.21	0.20	0.29
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 95.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G100.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G105.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G110.0	0.12	0.20	0.14	0.23	0.13	0.17	0.10	0.19	0.16	0.28	0.19	0.27
G115.0	0.43	0.52	0.46	0.58	0.45	0.49	0.40	0.52	0.50	0.66	0.56	0.64
G120.0	0.81	0.93	0.86	1.02	0.85	0.89	0.77	0.93	0.93	1.16	1.02	1.12
G125.0	1.29	1.43	1.38	1.62	1.38	1.42	1.25	1.49	1.52	1.88	1.64	1.77
G130.0	1.96	2.16	2.10	2.46	2.14	2.19	1.95	2.30	2.37	2.91	2.55	2.72
G135.0	2.94	3.24	3.15	3.69	3.25	3.34	2.97	3.51	3.62	4.42	3.90	4.15
G140.0	4.41	4.86	4.70	5.41	4.83	5.04	4.55	5.35	5.46	6.55	5.91	6.39
G145.0	6.67	7.28	6.87	7.71	7.02	7.49	6.85	8.03	8.04	9.43	8.87	9.81
G150.0	10.01	10.69	9.89	10.77	9.94	10.77	10.13	11.67	11.60	13.46	13.04	14.99
G155.0	14.73	15.43	13.94	14.99	13.86	15.18	14.49	16.60	16.37	19.04	18.96	22.34
G160.0	21.21	21.94	19.60	20.90	19.29	21.21	20.27	23.09	22.94	26.77	27.08	32.02
G165.0	29.78	30.62	27.42	29.15	26.82	29.38	28.11	31.78	31.51	36.50	37.12	43.07
G170.0	40.22	41.30	37.61	39.64	36.67	39.68	38.14	42.12	41.74	46.72	47.56	52.91
G175.0	50.92	52.02	48.75	50.71	47.87	50.49	48.81	52.09	51.42	54.82	55.52	58.72
G180.0	58.19	59.03	57.54	58.70	56.87	58.10	56.96	58.08	57.43	57.94	58.32	58.33

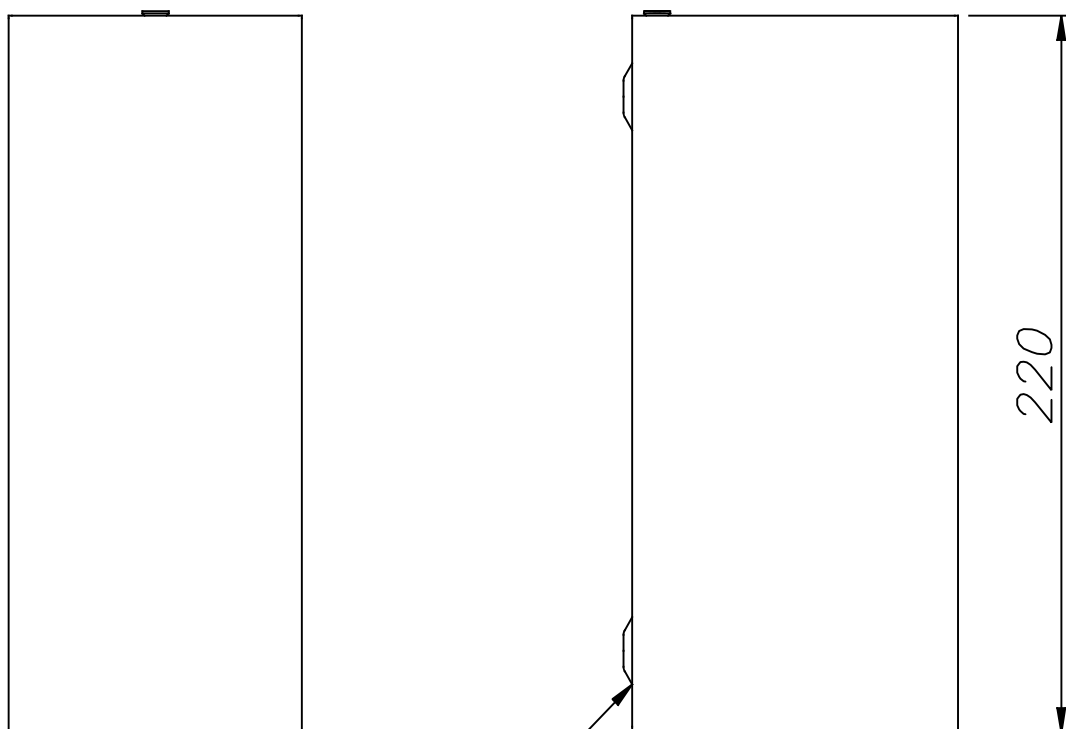


ACERO GALVANIZADO Y PINTADO
GALVANIZED AND PAINTED STEEL

CRISTAL ARENADO INTERIOR
INSIDE SANDFROSTED GLASS

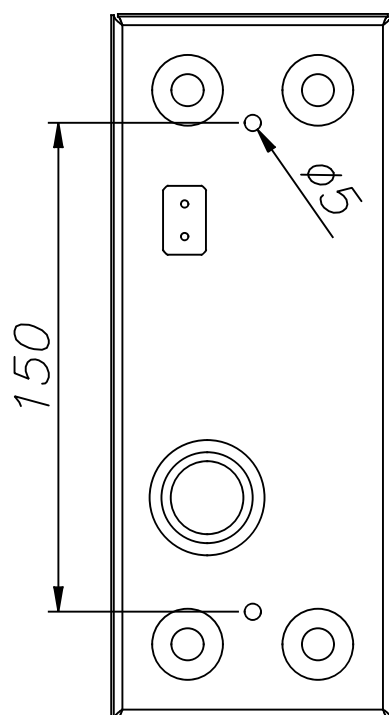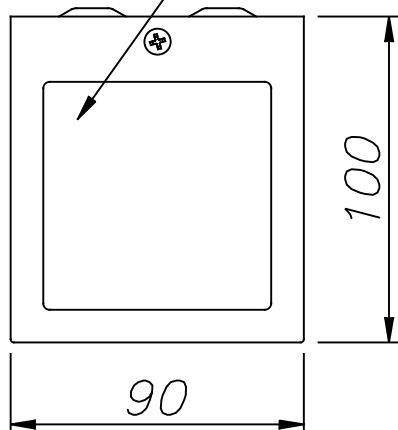

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE



Cube

PX-0056

FOR
LIGHT

