
Lord

PX-0273-INO

Surface-mounted wall light IP54 Lord GU10 8W Stainless steel





TECHNICAL FEATURES

IP54 IK05 RF 850ºC ±90º 0,2m

Luminaire total power : 8W

Real lumens : 300

Real lm/W : 38

Lens / reflector angle : MEDIUM 40º

Structure material : Stainless steel AISI202

Structure finish : Stainless steel

Diffuser material : Glass

Diffuser finish : Tinted

Max. size of light bulb : 70/50 mm

Recommended light bulb : GU10


Voltage / frequency : 100-240V ~ 50/60Hz


Warranty : 3 Years

Easily recyclable luminaire

LUMINOTECHNIC FEATURES

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
GU10	1	Max. power 8W	-





LOGISTICS

Net weight (kg): 0.57

Packaged weight (kg): 0.67

Packaging: 135mm x 105mm x 155mm

12 Un

LIGHT APPLICATION

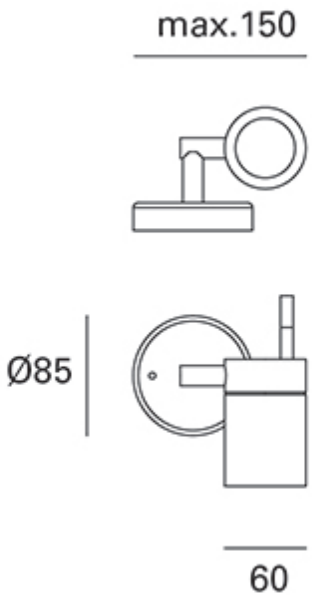


Image may not match reference. LEDS C4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature are subject to a tolerance of ±10%.

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10


Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Round Luminaire	Diam. 85 mm	Height	150 mm
Round Luminous Area	Diam. 75 mm	Height	0 mm
Horizontal Luminous Area	0.004418 m2	Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.001069 m2
Coordinate system	CG Roads	Symmetry Type	Sym. on planes 270-90
Date	27-01-2017	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	300.00 lm
Operator	Asselum T3	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			


Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	0021312	0021312	300.00	50.00	1

C.I.E. 94 99 100 100 75 D DIN 5040 A60



ULOR 0.00 %
DLOR 74.65 %
RN 0.00 %

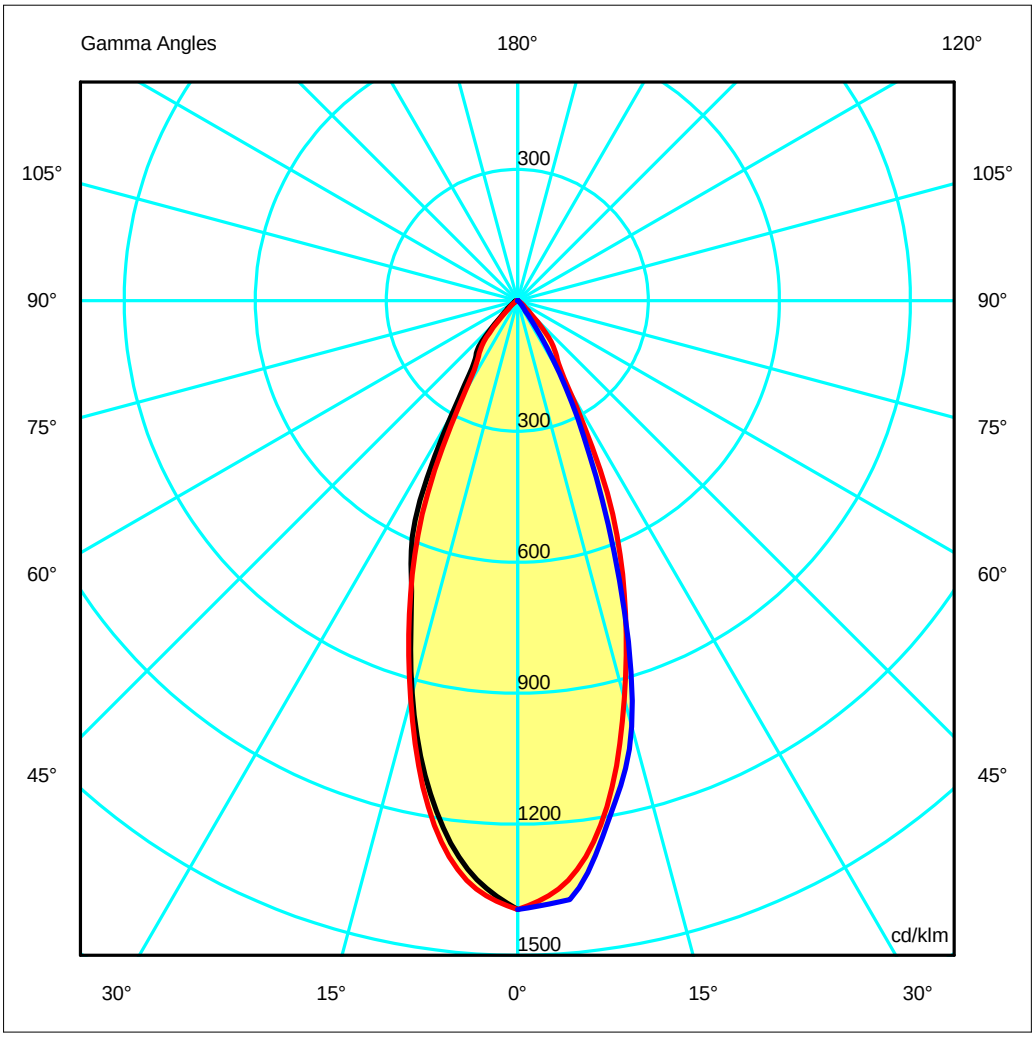

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10


Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90


Luminous Intensity Table cd/klm **Table 1/1**


	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33	1395.33
G 5.0	1307.61	1308.93	1321.20	1334.99	1344.95	1346.33	1333.45	1327.98	1328.62	1325.44	1353.33	1371.02	1377.49
G 10.0	1147.64	1149.13	1159.11	1161.36	1180.25	1191.81	1177.87	1163.31	1156.18	1130.34	1173.68	1204.71	1206.66
G 15.0	931.97	940.92	982.52	985.16	972.73	964.42	945.35	935.82	951.38	956.75	968.23	991.22	1010.85
G 20.0	708.99	715.84	746.33	741.73	730.21	741.03	715.35	706.57	712.20	700.84	683.58	672.23	682.13
G 25.0	555.21	530.60	509.48	502.81	485.94	491.05	485.85	477.96	447.38	423.83	407.60	400.93	391.65
G 30.0	300.52	291.21	276.90	270.37	250.07	247.64	236.88	236.56	228.78	218.40	209.20	198.88	192.51
G 35.0	172.98	174.04	180.63	172.78	165.69	161.98	156.01	151.95	149.48	125.05	89.19	59.27	54.29
G 40.0	137.73	129.32	127.78	126.63	122.10	114.42	110.89	100.47	50.47	28.76	20.38	18.47	18.12
G 45.0	59.96	59.11	56.62	59.69	56.39	54.54	42.99	29.18	18.59	14.64	11.56	10.34	8.91
G 50.0	32.32	31.90	31.29	31.18	29.93	29.23	20.70	12.81	7.85	4.51	1.64	1.40	1.31
G 55.0	17.95	17.32	17.80	17.35	16.87	14.72	8.76	5.15	2.02	1.44	1.10	0.92	0.82
G 60.0	9.85	10.11	9.94	9.31	8.83	6.78	3.95	2.12	1.45	0.97	0.56	0.30	0.28
G 65.0	6.61	6.58	6.22	5.79	5.06	3.38	2.38	1.63	1.01	0.43	0.31	0.27	0.26
G 70.0	4.79	4.65	4.42	4.02	3.43	2.68	1.95	1.20	0.61	0.39	0.39	0.41	0.41
G 75.0	4.40	4.25	4.01	3.55	2.99	2.27	1.53	0.89	0.56	0.55	0.59	0.61	0.63
G 80.0	4.08	3.90	3.63	3.12	2.55	1.80	1.25	0.82	0.74	0.74	0.79	0.83	0.86
G 85.0	3.30	3.15	2.94	2.50	2.08	1.60	1.15	0.91	0.93	0.94	0.99	1.05	1.10
G 90.0	3.23	3.08	2.83	2.44	2.00	1.47	1.05	1.08	1.10	1.12	1.18	1.27	1.32

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90



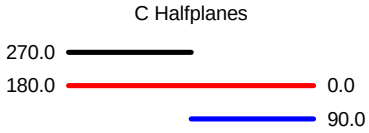

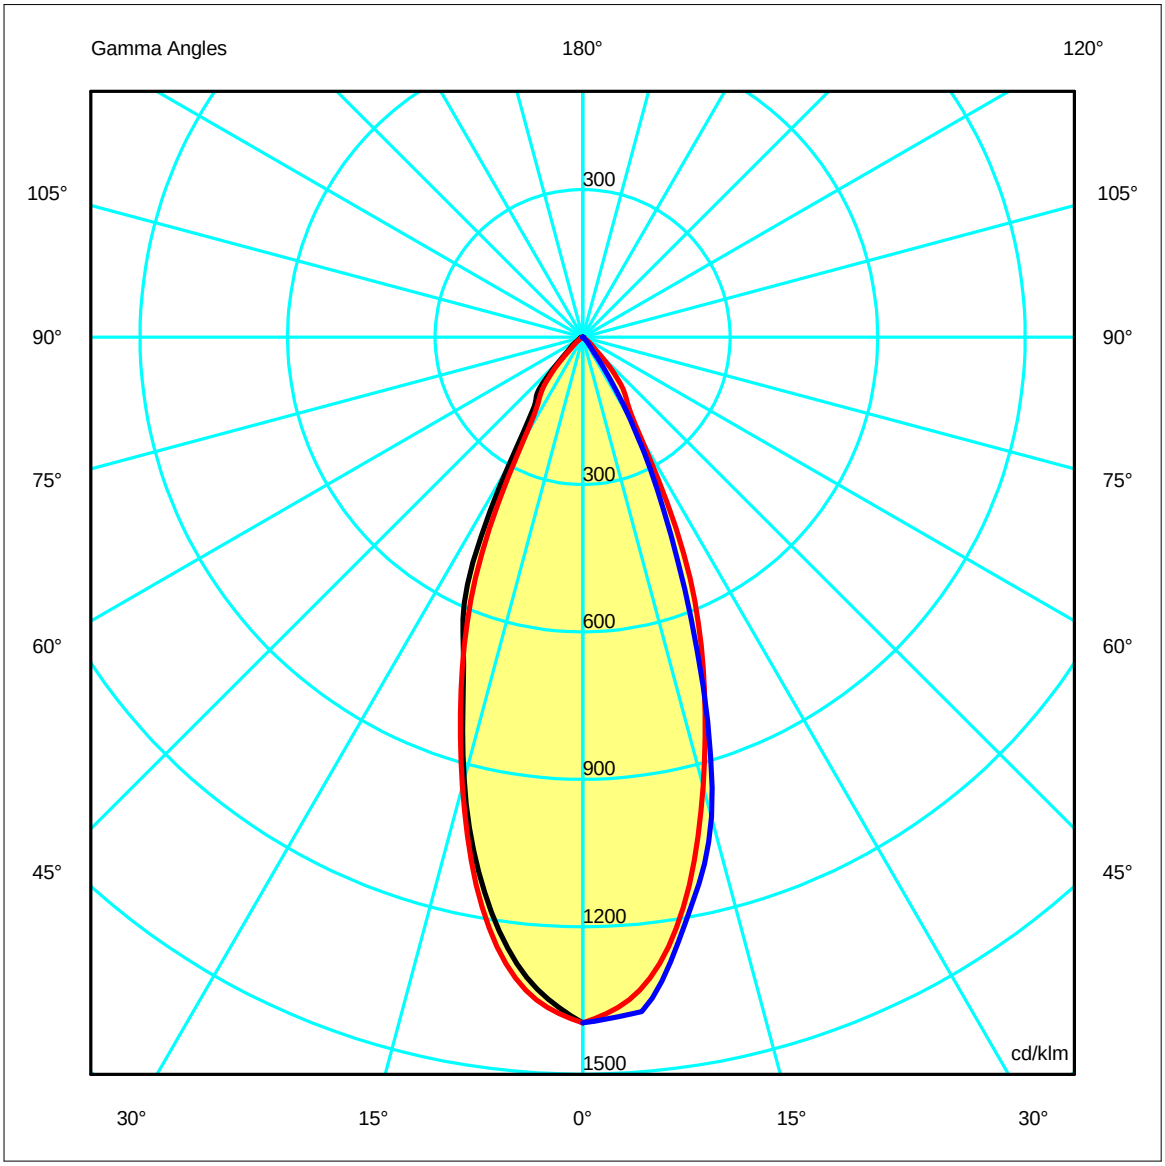

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10


Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.37	0.74	1.12	1.49	1.86	OC	0.36	0.72	1.08	1.44	1.80
OB	0.37	0.74	1.12	1.49	1.86	OD	0.37	0.74	1.11	1.48	1.86

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	418.60	400.04	283.61	145.76	46.80	12.90	2.63	0.71	0.46	0.35
OB	418.60	400.04	283.61	145.76	46.80	12.90	2.63	0.71	0.46	0.35
OC	418.60	413.25	303.26	117.49	16.29	2.67	0.25	0.08	0.19	0.33
OD	418.60	392.28	279.59	166.56	51.89	17.99	5.38	1.98	1.32	0.99

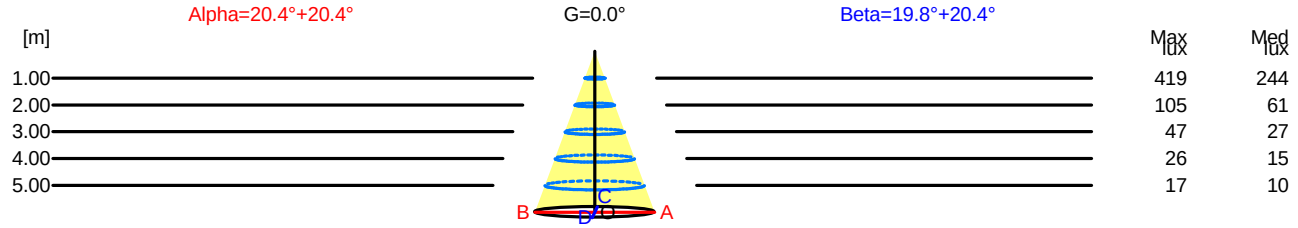

H[m]	D[m]	Max lux	Med lux	Alpha=20.4°+20.4° G=0.0
1.00	0.74	419	244	
2.00	1.49	105	61	
3.00	2.23	47	27	
4.00	2.98	26	15	
5.00	3.72	17	10	

H[m]	D[m]	Max lux	Med lux	Beta=20.4°+19.8° G=0.0
1.00	0.73	419	244	
2.00	1.46	105	61	
3.00	2.19	47	27	
4.00	2.92	26	15	
5.00	3.65	17	10	

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10


Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90


UGR
S = 0.250


Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	11.4	12.1	11.7	12.3	14.2	13.1	13.8	13.4	14.0	14.2
x=2H y=3H	11.3	12.0	11.6	12.2	14.3	13.1	13.8	13.4	14.0	14.3
x=2H y=4H	11.3	11.9	11.6	12.1	14.3	13.2	13.8	13.5	14.0	14.3
x=2H y=6H	11.2	11.8	11.6	12.1	14.4	13.3	13.9	13.7	14.2	14.4
x=2H y=8H	11.2	11.8	11.6	12.1	14.6	13.5	14.0	13.8	14.3	14.6
x=2H y=12H	11.3	11.8	11.6	12.0	14.7	13.6	14.1	14.0	14.4	14.7
x=4H y=2H	11.3	11.9	11.6	12.1	14.1	13.0	13.6	13.3	13.9	14.1
x=4H y=3H	11.2	11.7	11.6	12.0	14.2	13.1	13.6	13.4	13.9	14.2
x=4H y=4H	11.2	11.6	11.6	12.0	14.3	13.2	13.6	13.6	14.0	14.3
x=4H y=6H	11.2	11.6	11.6	11.9	14.6	13.5	13.8	13.9	14.2	14.6
x=4H y=8H	11.2	11.5	11.6	11.9	14.8	13.7	14.0	14.1	14.4	14.8
x=4H y=12H	11.3	11.6	11.7	11.9	15.1	14.0	14.3	14.4	14.6	15.1
x=8H y=4H	11.2	11.5	11.6	11.9	14.3	13.2	13.5	13.6	13.9	14.3
x=8H y=6H	11.2	11.5	11.7	11.9	14.7	13.6	13.8	14.0	14.2	14.7
x=8H y=8H	11.3	11.5	11.8	12.0	15.0	13.9	14.1	14.4	14.5	15.0
x=8H y=12H	11.4	11.6	11.9	12.0	15.5	14.3	14.5	14.8	15.0	15.5
x=12H y=4H	11.2	11.5	11.6	11.8	14.3	13.2	13.4	13.6	13.8	14.3
x=12H y=6H	11.3	11.5	11.7	11.9	14.7	13.6	13.8	14.1	14.2	14.7
x=12H y=8H	11.4	11.5	11.8	12.0	15.1	13.9	14.1	14.4	14.6	15.1

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90






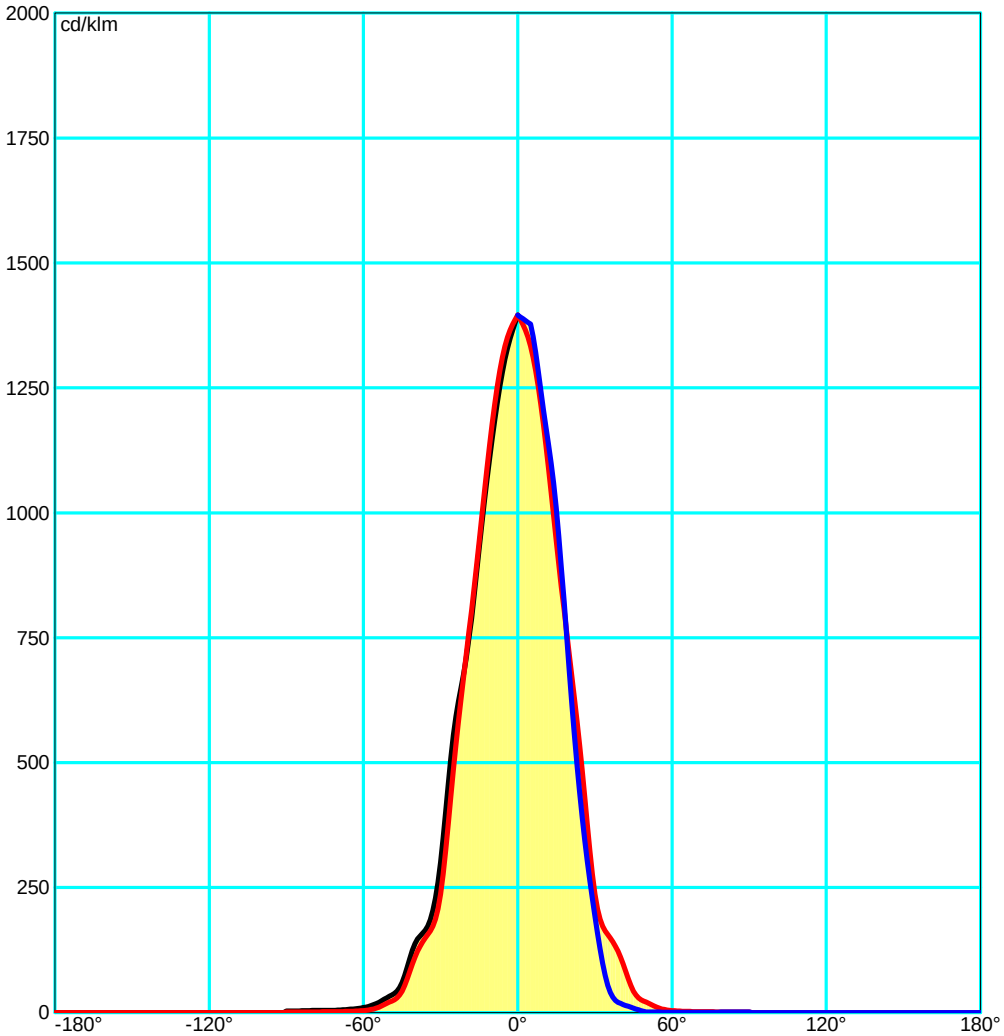

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Luminance

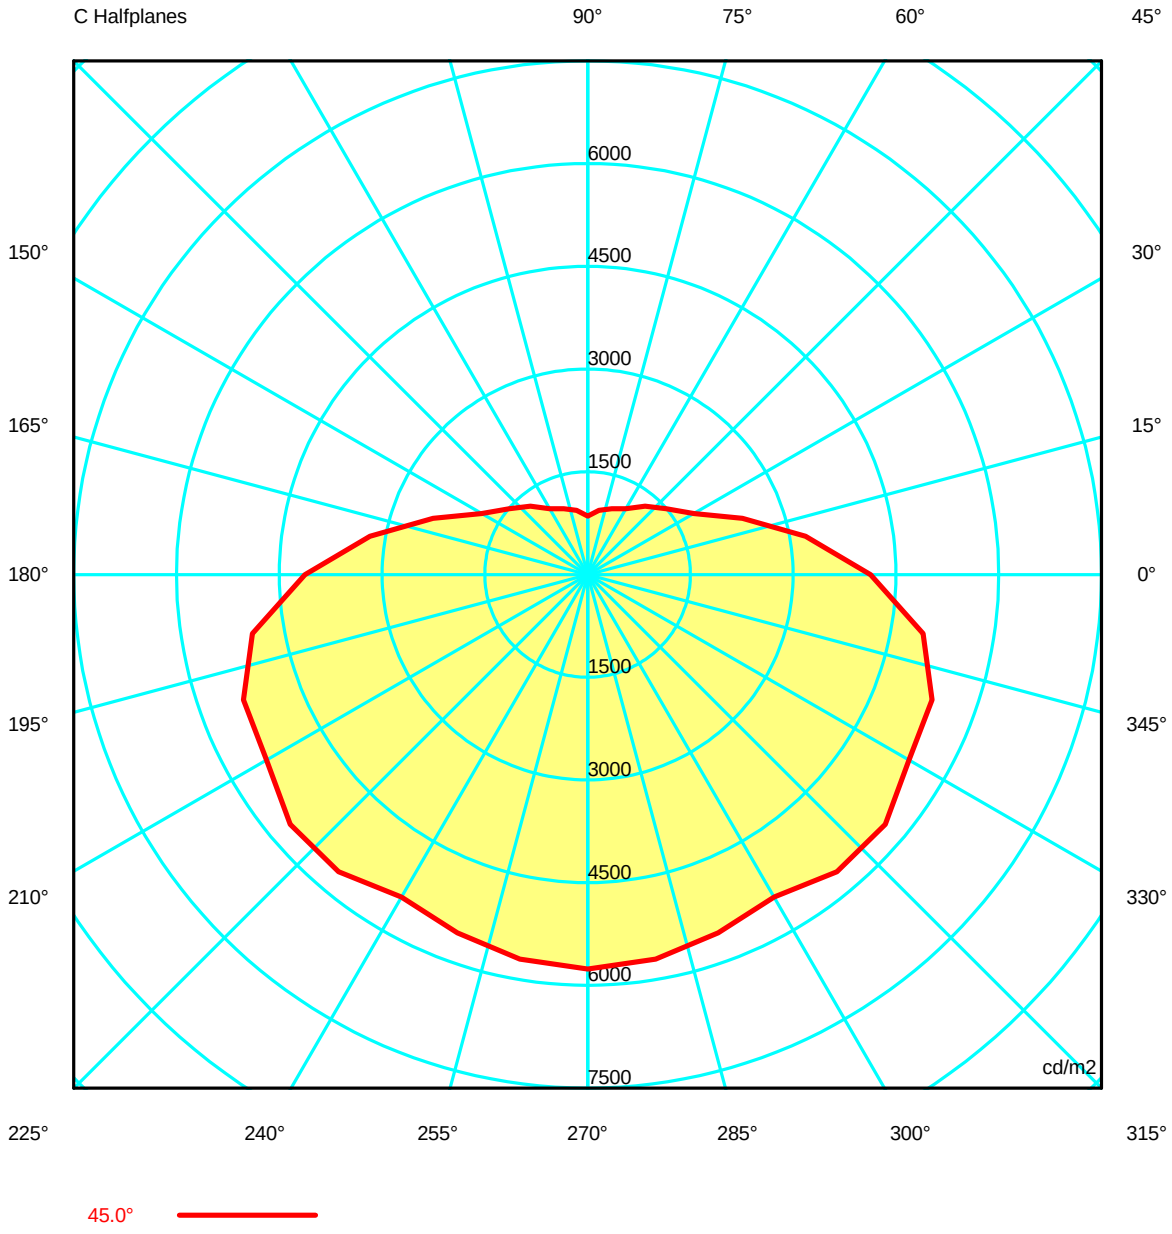

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82
G 5.0	90892.51	90547.86	90533.91	90563.06	90418.54	90823.38	92247.82	93186.45	93642.01	93894.11	93642.01	93186.45	92247.82
G 10.0	81215.71	80424.52	80161.20	79720.69	78204.18	78521.75	80926.72	82640.14	83111.52	83200.86	83111.52	82640.14	80926.72
G 15.0	66457.63	65794.53	66068.30	66881.70	67180.29	67417.14	68065.98	69125.79	70181.72	71062.41	70181.72	69125.79	68065.98
G 20.0	51692.48	51041.30	51215.57	51465.30	51032.24	50231.33	49396.91	48704.49	48674.59	49291.81	48674.59	48704.49	49396.91
G 25.0	36402.05	36152.28	35168.26	33519.55	32258.02	31282.68	30538.64	30183.16	29843.55	29343.62	29843.55	30183.16	30538.64
G 30.0	18573.31	18556.65	18432.98	17938.24	17382.23	16886.32	16403.29	15845.97	15393.69	15094.55	15393.69	15845.97	16403.29
G 35.0	12932.70	12649.03	12527.69	12391.62	11224.98	9414.68	7393.32	5542.67	4775.37	4500.08	4775.37	5542.67	7393.32
G 40.0	9829.13	9213.77	7580.21	4473.54	2910.33	2248.34	1806.41	1653.58	1626.59	1606.36	1626.59	1653.58	1806.41
G 45.0	4128.28	3229.08	2402.88	1785.58	1497.55	1302.01	1109.70	1021.76	954.09	855.31	954.09	1021.76	1109.70
G 50.0	2186.48	1592.44	1149.43	829.16	589.79	358.46	173.66	156.65	144.91	138.43	144.91	156.65	173.66
G 55.0	1037.56	732.35	473.25	239.35	173.81	160.81	129.73	112.88	104.92	97.53	104.92	112.88	129.73
G 60.0	536.79	349.47	245.96	196.69	152.95	111.05	75.53	48.68	39.51	37.44	39.51	48.68	75.53
G 65.0	381.90	299.98	228.10	162.73	94.74	56.31	49.82	44.99	42.69	42.52	42.69	44.99	49.82
G 70.0	387.53	286.99	192.12	120.26	84.44	77.83	78.41	80.74	81.59	82.12	81.59	80.74	78.41
G 75.0	401.91	282.36	193.60	148.14	140.44	147.34	153.64	157.35	160.62	164.60	160.62	157.35	153.64
G 80.0	489.32	366.26	298.37	287.75	288.02	295.61	309.37	321.16	330.25	337.96	330.25	321.16	309.37
G 85.0	898.50	746.99	713.91	722.66	729.16	742.36	774.72	806.10	832.77	856.53	832.77	806.10	774.72
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82
G 5.0	90823.38	90418.54	90563.06	90533.91	90547.86	90892.51	91528.90	91857.82	91676.44	91261.16	90704.21	90057.46	89432.64
G 10.0	78521.75	78204.18	79720.69	80161.20	80424.52	81215.71	82005.96	82100.26	81380.31	80403.66	79966.34	79922.28	79467.44
G 15.0	67417.14	67180.29	66881.70	66068.30	65794.53	66457.63	67414.35	68040.40	68382.15	68951.17	69482.48	69070.78	67083.41
G 20.0	50231.33	51032.24	51465.30	51215.57	51041.30	51692.48	53136.60	53441.01	52766.26	53161.44	53973.10	53931.29	52459.83
G 25.0	31282.68	32258.02	33519.55	35168.26	36152.28	36402.05	36753.39	36625.53	36408.69	37231.28	37887.55	38171.93	39123.24
G 30.0	16886.32	17382.23	17938.24	18432.98	18556.65	18573.31	19175.50	19458.00	19607.42	20681.78	21457.83	21711.12	22430.48
G 35.0	9414.68	11224.98	12391.62	12527.69	12649.03	12932.70	13281.64	13536.47	13735.23	14073.45	14615.87	14973.04	14642.78
G 40.0	2248.34	2910.33	4473.54	7580.21	9213.77	9829.13	9974.45	10361.48	10823.67	11133.03	11282.53	11326.30	11364.85
G 45.0	1302.01	1497.55	1785.58	2402.88	3229.08	4128.28	4967.89	5349.49	5415.56	5669.82	5661.09	5437.10	5566.40
G 50.0	358.46	589.79	829.16	1149.43	1592.44	2186.48	2859.03	3112.46	3161.80	3244.89	3297.51	3305.86	3344.44
G 55.0	160.81	173.81	239.35	473.25	732.35	1037.56	1524.78	1883.51	1997.09	2035.35	2078.65	2106.91	2065.99
G 60.0	111.05	152.95	196.69	245.96	349.47	536.79	791.75	1037.63	1199.05	1249.57	1289.76	1350.19	1374.48
G 65.0	56.31	94.74	162.73	228.10	299.98	381.90	475.12	632.65	813.06	906.03	954.00	999.97	1043.23
G 70.0	77.83	84.44	120.26	192.12	286.99	387.53	482.79	581.68	680.82	763.62	829.24	878.49	911.30
G 75.0	147.34	140.44	148.14	193.60	282.36	401.91	530.36	661.48	784.72	886.80	976.57	1051.84	1099.57
G 80.0	295.61	288.02	287.75	298.37	366.26	489.32	624.54	799.56	995.69	1151.77	1293.33	1420.14	1498.00
G 85.0	742.36	729.16	722.66	713.91	746.99	898.50	1119.81	1372.32	1618.24	1837.07	2070.73	2289.72	2411.89
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency 74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG Sym. on planes 270-90

Luminance cd/m2 **Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82	94748.82
G 5.0	89190.88	89130.86	89190.88	89432.64	90057.46	90704.21	91261.16	91676.44	91857.82	91528.90
G 10.0	79199.94	79131.22	79199.94	79467.44	79922.28	79966.34	80403.66	81380.31	82100.26	82005.96
G 15.0	65936.23	65516.81	65936.23	67083.41	69070.78	69482.48	68951.17	68382.15	68040.40	67414.35
G 20.0	51563.15	51233.16	51563.15	52459.83	53931.29	53973.10	53161.44	52766.26	53441.01	53136.60
G 25.0	40380.72	41598.18	40380.72	39123.24	38171.93	37887.55	37231.28	36408.69	36625.53	36753.39
G 30.0	23142.83	23563.08	23142.83	22430.48	21711.12	21457.83	20681.78	19607.42	19458.00	19175.50
G 35.0	14397.56	14338.98	14397.56	14642.78	14973.04	14615.87	14073.45	13735.23	13536.47	13281.64
G 40.0	11653.89	12209.08	11653.89	11364.85	11326.30	11282.53	11133.03	10823.67	10361.48	9974.45
G 45.0	5703.31	5757.57	5703.31	5566.40	5437.10	5661.09	5669.82	5415.56	5349.49	4967.89
G 50.0	3389.72	3413.81	3389.72	3344.44	3305.86	3297.51	3244.89	3161.80	3112.46	2859.03
G 55.0	2059.54	2124.46	2059.54	2065.99	2106.91	2078.65	2035.35	1997.09	1883.51	1524.78
G 60.0	1364.47	1337.44	1364.47	1374.48	1350.19	1289.76	1249.57	1199.05	1037.63	791.75
G 65.0	1059.17	1062.17	1059.17	1043.23	999.97	954.00	906.03	813.06	632.65	475.12
G 70.0	933.67	951.62	933.67	911.30	878.49	829.24	763.62	680.82	581.68	482.79
G 75.0	1129.78	1153.65	1129.78	1099.57	1051.84	976.57	886.80	784.72	661.48	530.36
G 80.0	1548.87	1593.95	1548.87	1498.00	1420.14	1293.33	1151.77	995.69	799.56	624.54
G 85.0	2490.33	2569.07	2490.33	2411.89	2289.72	2070.73	1837.07	1618.24	1372.32	1119.81
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 11.7 Tight Tilting Angle:0°

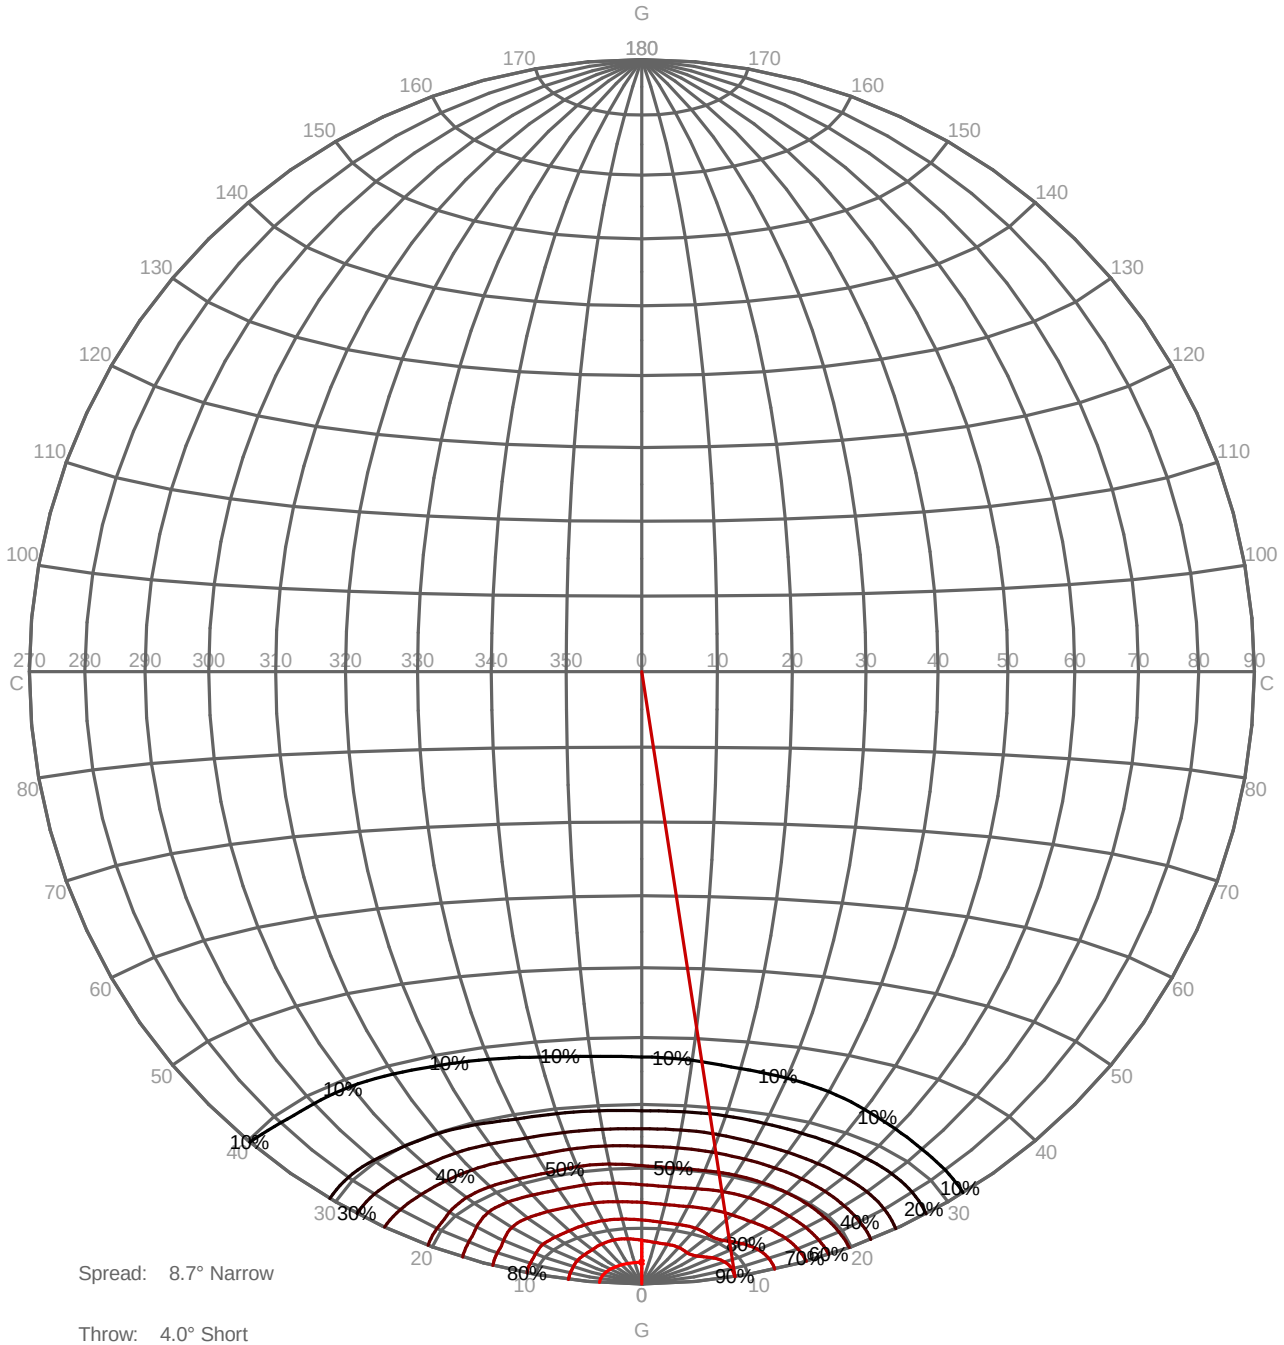

Spread: 8.7° Narrow


Throw: 4.0° Short

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10

Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

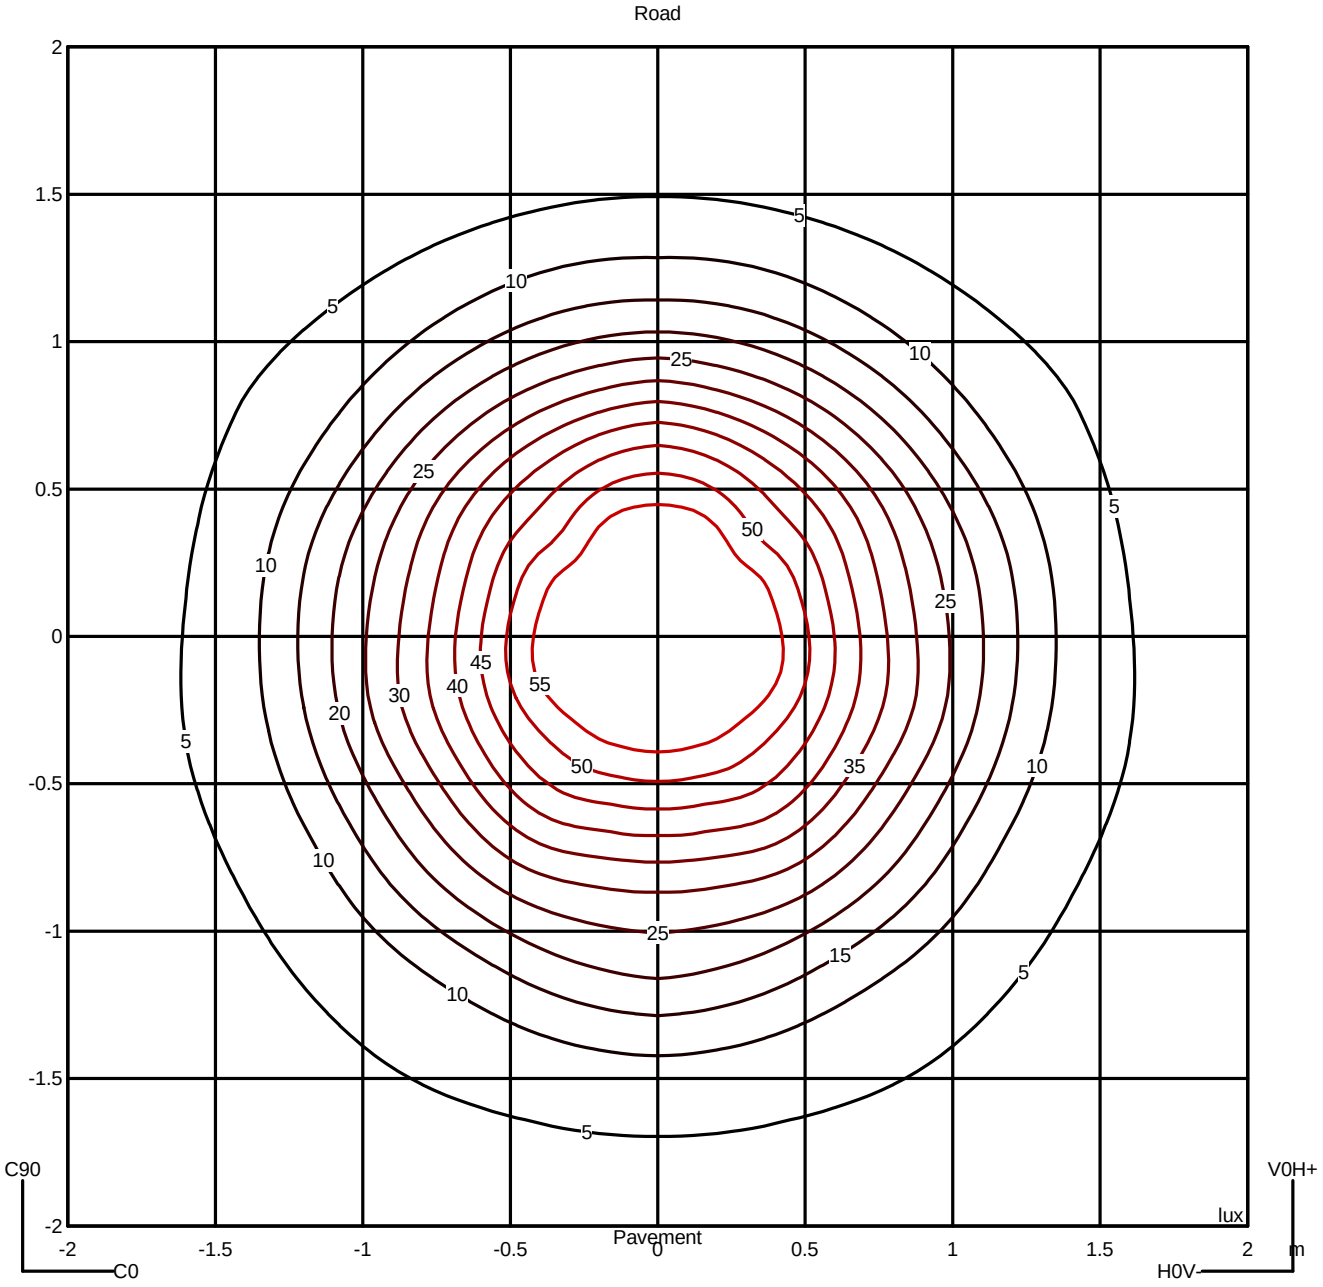

Luminaire
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10
Measurem.
Code PX-0273-INO
Name Proyector HUBBLE 50W GU10


Luminaire Flux	223.94 lm	Luminaire Power	50.00 W	Efficacy	4.48 lm/W	Efficiency	74.65%
Lamps Flux	300.00 lm	Maximum value	1395.33 cd/klm	Position	C=0.00 G=0.00	CG	Sym. on planes 270-90


Average Luminance [cd/m²]


	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	4128	2186	1038	537	382	388	402	489	899	---
90.0°	855	138	98	37	43	82	165	338	857	---

Flush mounted or longitudinal view

		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

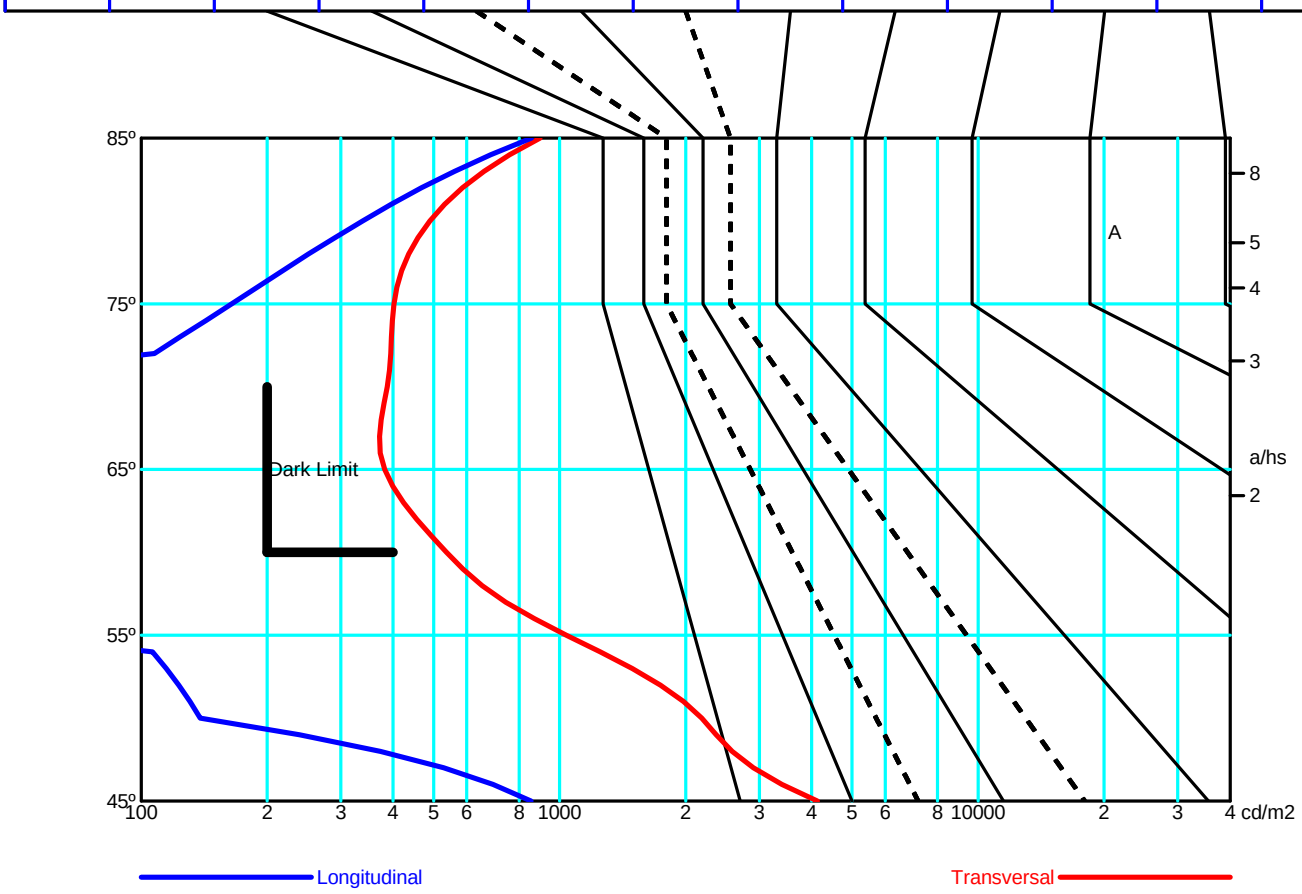


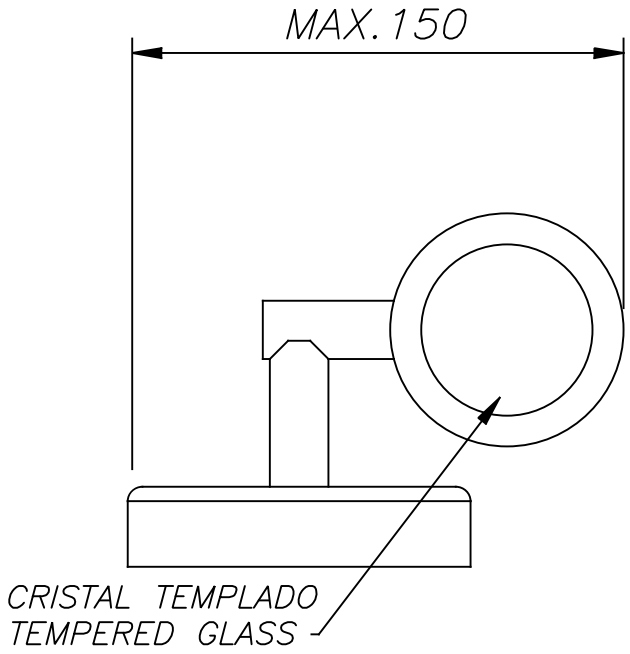

MAX. 150
CRISTAL TEMPLADO
TEMPERED GLASS

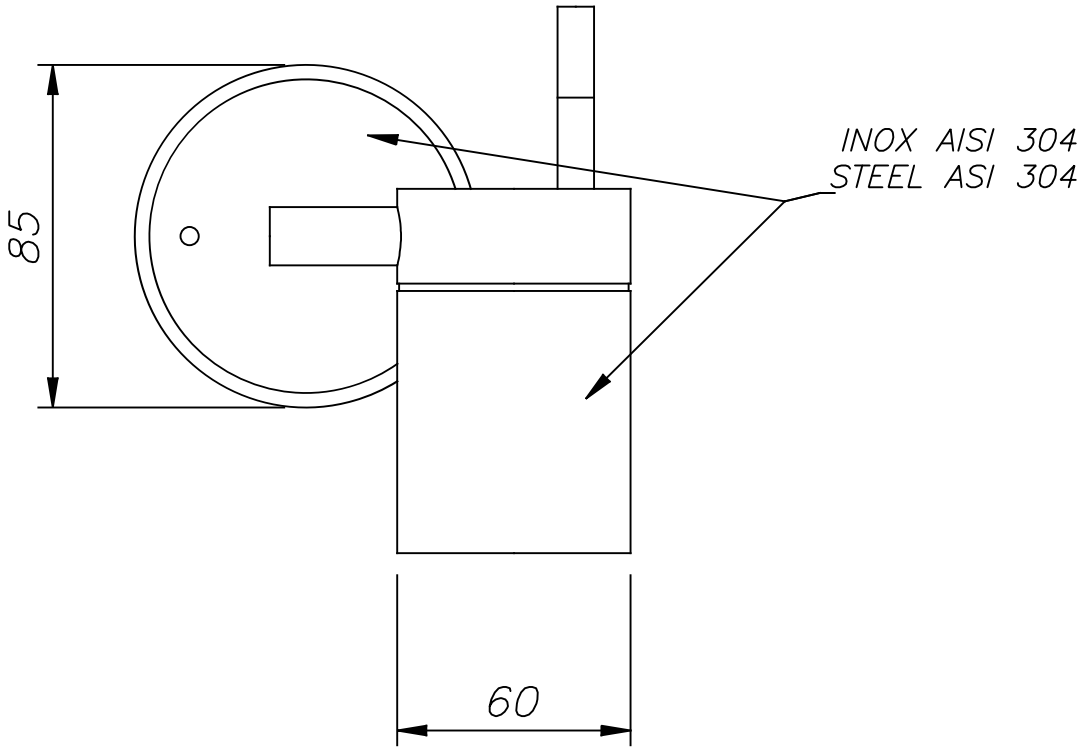

85
INOX AISI 304
STEEL ASI 304
60


Lord

PX-0273





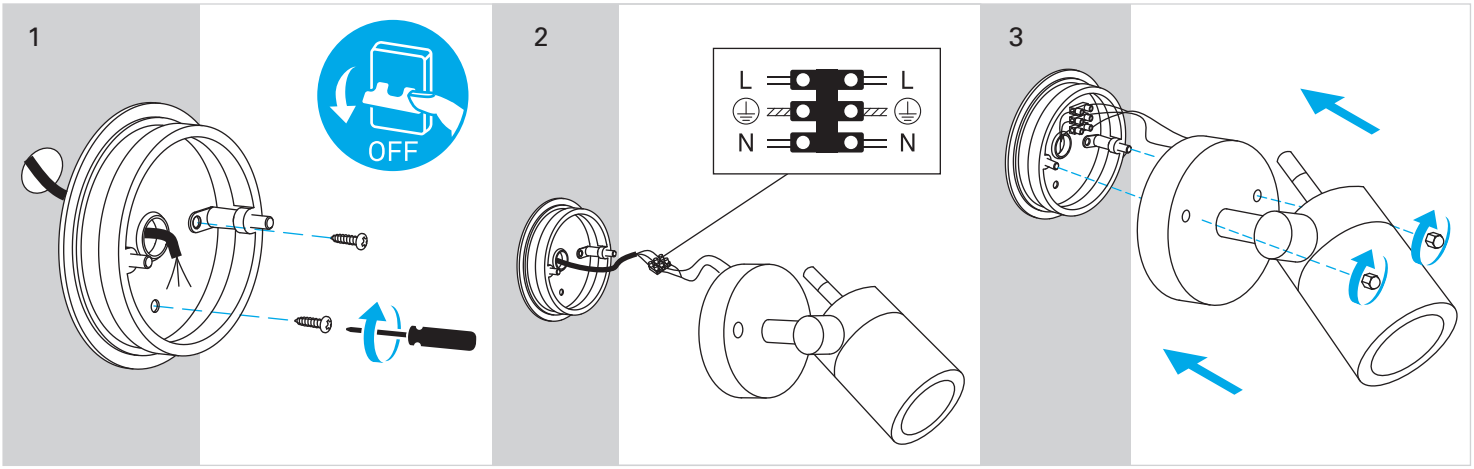

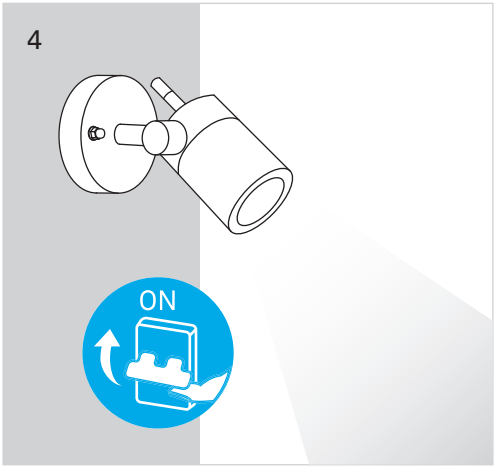

07-09-2021