FOR LIGHT

STRIP


TC-2900-SIN

Led strip STRIP LED 24 LED warm-white 3000K NA IP20



TECHNICAL FEATURES

IP20



Luminaire total power : 24W

Real lumens : 358

Nominal lumens : 1200


Real lm/W : 15

Lens / reflector angle : HORIZONTAL 114º

Equipment necessary but not included :

Useful life : 36.000h L70B30


Warranty : 3 Years




LUMINOTECHNIC FEATURES

Photobiological risk: RG0

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	24W	3000K





LOGISTICS

Net weight (kg): 0.1

Packaged weight (kg): 0.14

Packaging: 210mm x 20mm x 240mm

25 Un

LIGHT APPLICATION

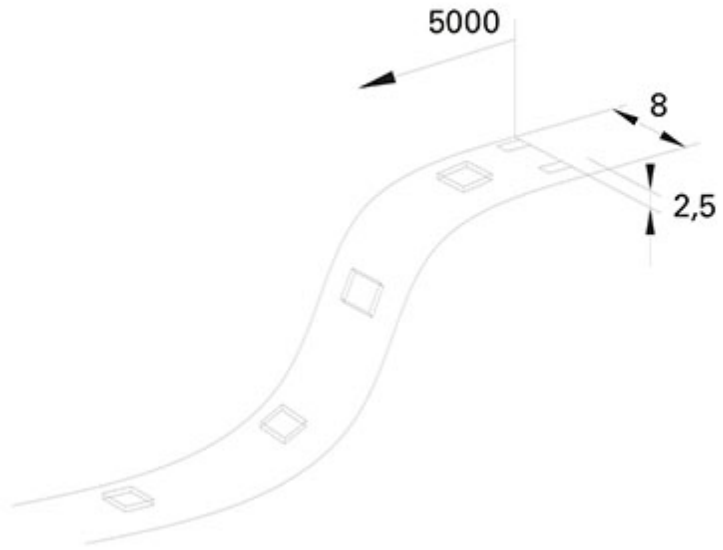


Image may not match reference. LEDS C4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature are subject to a tolerance of ±10%.

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Rectangular Luminaire	Length	1000 mm	Width	8 mm	Height	3 mm
Rectangular Luminous Area	Length	1000 mm	Width	3 mm	Height	0 mm
Horizontal Luminous Area	0.003000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°		0.000726 m2	


Coordinate system	CG	Symmetry Type	Double Symmetrical
Date	24-02-2016	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	358.15 lm
Operator	Asselum T2	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	TC-2900-SIN	TC-2900-SIN - 24.00 W	358.15	24.00	1


C.I.E.	47 79 95 99 100	D DIN 5040	A31
F UTE	0.99 E + 0.01 T	B NBN	BZ 5

1000mm x 8mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

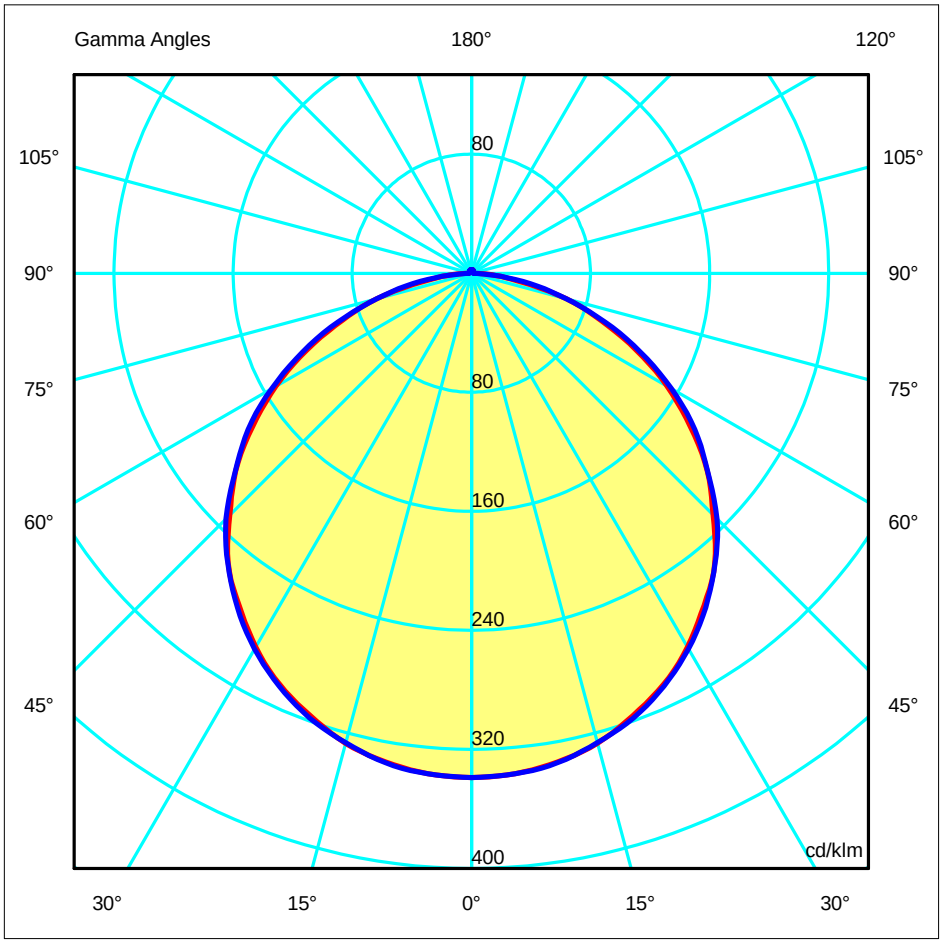

ULOR	1.15 %
DLOR	98.85 %
RN	1.15 %

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


Luminous Intensity Table cd/klm **Table 1/1**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	338.92	338.92	338.92	338.92	338.92	338.92	338.92
G 5.0	337.46	337.41	337.62	337.53	337.44	337.52	337.53
G 10.0	333.28	333.73	333.33	333.65	333.36	333.44	333.89
G 15.0	326.90	326.15	326.80	326.72	327.12	327.07	326.46
G 20.0	316.39	317.31	317.20	317.26	317.52	317.83	317.89
G 25.0	304.90	303.94	305.39	305.00	305.78	305.99	305.88
G 30.0	289.94	290.27	289.65	290.76	291.05	291.31	291.42
G 35.0	272.26	272.89	272.86	273.18	273.73	274.07	274.10
G 40.0	254.24	252.30	253.92	253.28	253.68	254.33	254.56
G 45.0	229.49	231.90	230.67	232.11	231.47	231.90	233.12
G 50.0	206.73	204.52	206.25	207.16	208.80	209.51	207.10
G 55.0	179.54	179.94	179.41	180.79	181.72	183.11	183.12
G 60.0	151.57	151.40	152.37	152.56	154.01	154.45	154.99
G 65.0	122.18	122.66	123.40	123.66	124.52	124.82	125.15
G 70.0	92.49	94.50	93.70	94.84	94.69	95.33	95.19
G 75.0	65.89	63.53	65.42	65.34	64.85	65.37	65.78
G 80.0	34.76	37.89	37.20	37.61	37.00	37.58	40.15
G 85.0	16.78	15.73	17.64	17.17	18.50	18.66	15.44
G 90.0	2.75	3.58	3.59	4.11	4.45	4.46	2.17
G 95.0	1.30	1.29	1.35	1.34	1.25	1.22	1.25
G100.0	1.30	1.33	1.31	1.34	1.34	1.31	1.31
G105.0	1.42	1.43	1.37	1.40	1.41	1.40	1.37
G110.0	1.42	1.49	1.49	1.48	1.49	1.50	1.43
G115.0	1.54	1.58	1.59	1.55	1.55	1.55	1.49
G120.0	1.66	1.67	1.69	1.64	1.64	1.64	1.61
G125.0	1.74	1.77	1.79	1.76	1.76	1.73	1.73
G130.0	1.87	1.85	1.83	1.82	1.79	1.84	1.79
G135.0	1.90	1.94	1.92	1.94	1.91	1.91	1.91
G140.0	2.02	2.03	2.03	2.00	2.00	2.00	1.98
G145.0	2.13	2.14	2.13	2.12	2.07	2.11	2.10
G150.0	2.25	2.19	2.25	2.21	2.19	2.21	2.21
G155.0	2.37	2.27	2.30	2.30	2.27	2.27	2.27
G160.0	2.37	2.38	2.39	2.36	2.36	2.34	2.39
G165.0	2.49	2.44	2.51	2.43	2.45	2.39	2.51
G170.0	2.51	2.52	2.51	2.51	2.51	2.48	2.51
G175.0	2.61	2.59	2.57	2.53	2.57	2.57	2.58
G180.0	2.60	2.62	2.61	2.63	2.57	2.57	2.63

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V


Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

1000mm x 8mm



C Halfplanes



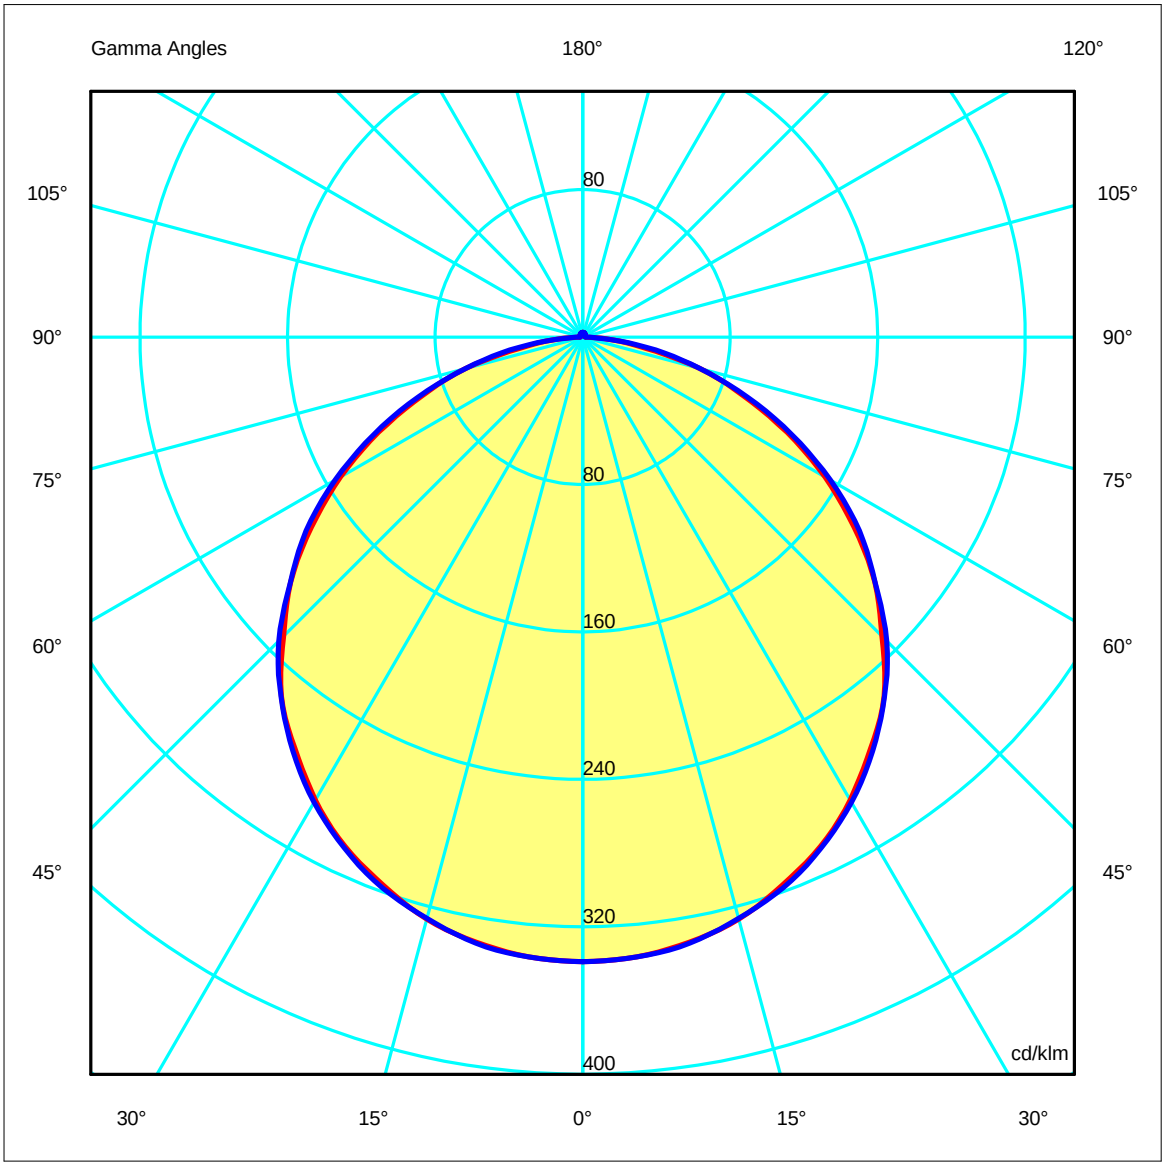

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V


Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.53	3.06	4.58	6.11	7.64	OC	1.57	3.14	4.71	6.28	7.85
OB	1.53	3.06	4.58	6.11	7.64	OD	1.57	3.14	4.71	6.28	7.85

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	121.38	120.86	117.08	109.20	97.51	82.19	64.30	43.76	23.60	6.01
OB	121.38	120.86	117.08	109.20	97.51	82.19	64.30	43.76	23.60	6.01
OC	121.38	120.89	116.92	109.55	98.17	83.49	65.58	44.82	23.56	5.53
OD	121.38	120.89	116.92	109.55	98.17	83.49	65.58	44.82	23.56	5.53

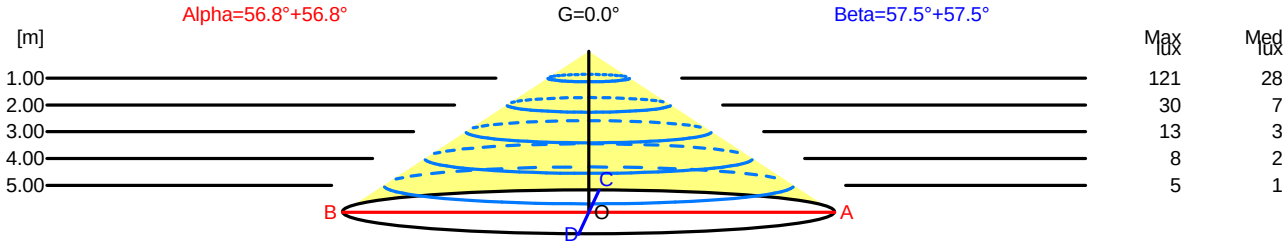

H[m]	D[m]	Max lux	Med lux	Alpha=56.8°+56.8° G=0.0
1.00	3.06	121	28	
2.00	6.11	30	7	
3.00	9.17	13	3	
4.00	12.23	8	2	
5.00	15.28	5	1	

H[m]	D[m]	Max lux	Med lux	Beta=57.5°+57.5° G=0.0
1.00	3.14	121	28	
2.00	6.28	30	7	
3.00	9.42	13	3	
4.00	12.57	8	2	
5.00	15.71	5	1	

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


UGR
S = 0.250


Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	25.0	26.3	25.3	26.6	26.9	25.1	26.4	25.4	26.7	26.9
x=2H y=3H	26.6	27.8	26.9	28.1	28.5	26.7	27.9	27.0	28.2	28.5
x=2H y=4H	27.2	28.4	27.6	28.7	29.1	27.3	28.5	27.7	28.8	29.1
x=2H y=6H	27.6	28.7	28.0	29.0	29.5	27.8	28.8	28.2	29.2	29.5
x=2H y=8H	27.8	28.8	28.1	29.1	29.6	27.9	28.9	28.3	29.3	29.6
x=2H y=12H	27.8	28.8	28.3	29.2	29.7	28.0	29.0	28.4	29.3	29.7
x=4H y=2H	25.8	26.9	26.1	27.2	27.6	25.8	27.0	26.2	27.3	27.6
x=4H y=3H	27.5	28.5	27.9	28.9	29.3	27.6	28.6	28.0	28.9	29.3
x=4H y=4H	28.3	29.1	28.7	29.5	30.0	28.4	29.2	28.8	29.6	30.0
x=4H y=6H	28.8	29.6	29.3	30.0	30.5	28.9	29.7	29.4	30.1	30.5
x=4H y=8H	29.0	29.7	29.5	30.1	30.7	29.1	29.8	29.6	30.2	30.7
x=4H y=12H	29.1	29.7	29.6	30.2	30.8	29.3	29.9	29.7	30.3	30.8
x=8H y=4H	28.6	29.3	29.1	29.7	30.2	28.7	29.4	29.1	29.8	30.2
x=8H y=6H	29.3	29.8	29.8	30.3	30.9	29.4	29.9	29.9	30.4	30.9
x=8H y=8H	29.5	30.0	30.0	30.5	31.1	29.7	30.1	30.1	30.6	31.1
x=8H y=12H	29.7	30.2	30.2	30.6	31.3	29.9	30.3	30.4	30.8	31.3
x=12H y=4H	28.6	29.3	29.1	29.7	30.2	28.7	29.3	29.2	29.8	30.2
x=12H y=6H	29.4	29.8	29.8	30.3	30.9	29.4	29.9	29.9	30.4	30.9
x=12H y=8H	29.6	30.1	30.2	30.6	31.2	29.8	30.2	30.3	30.7	31.2


Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

1000mm x 8mm






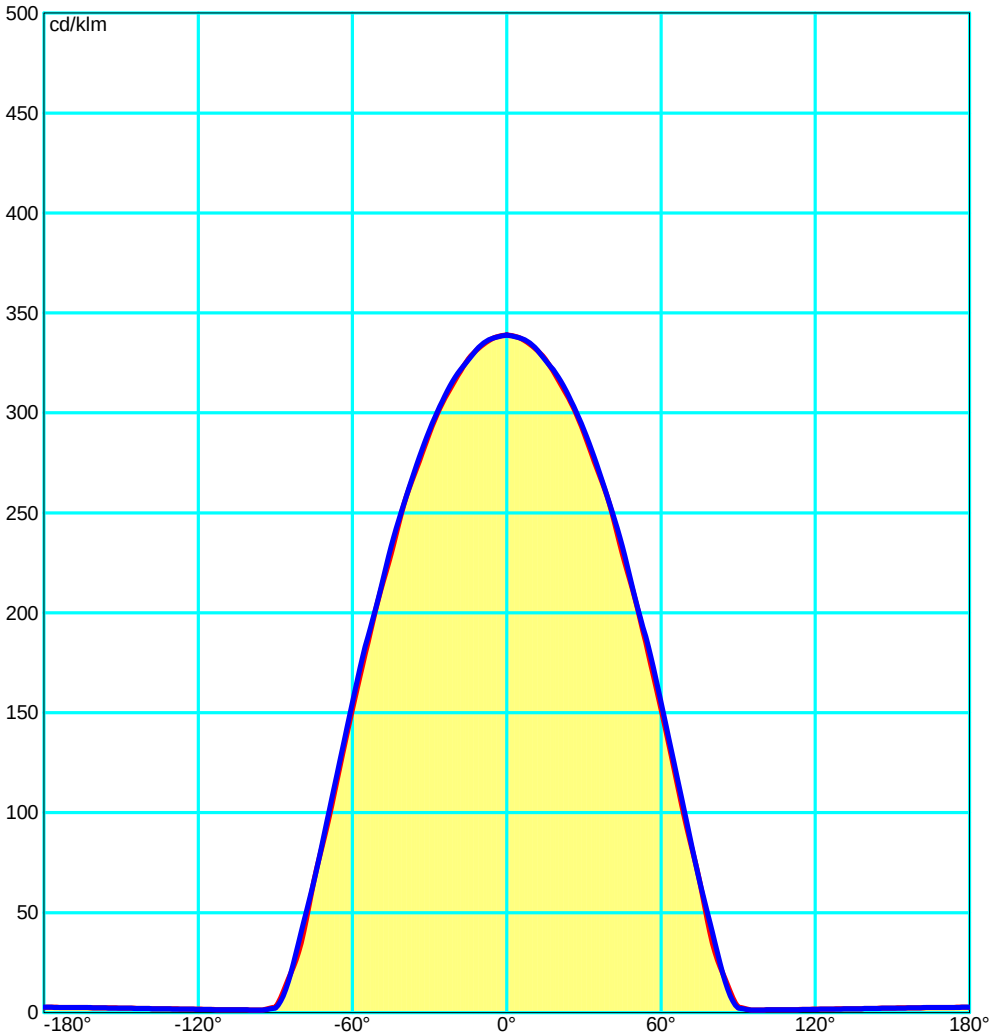

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance

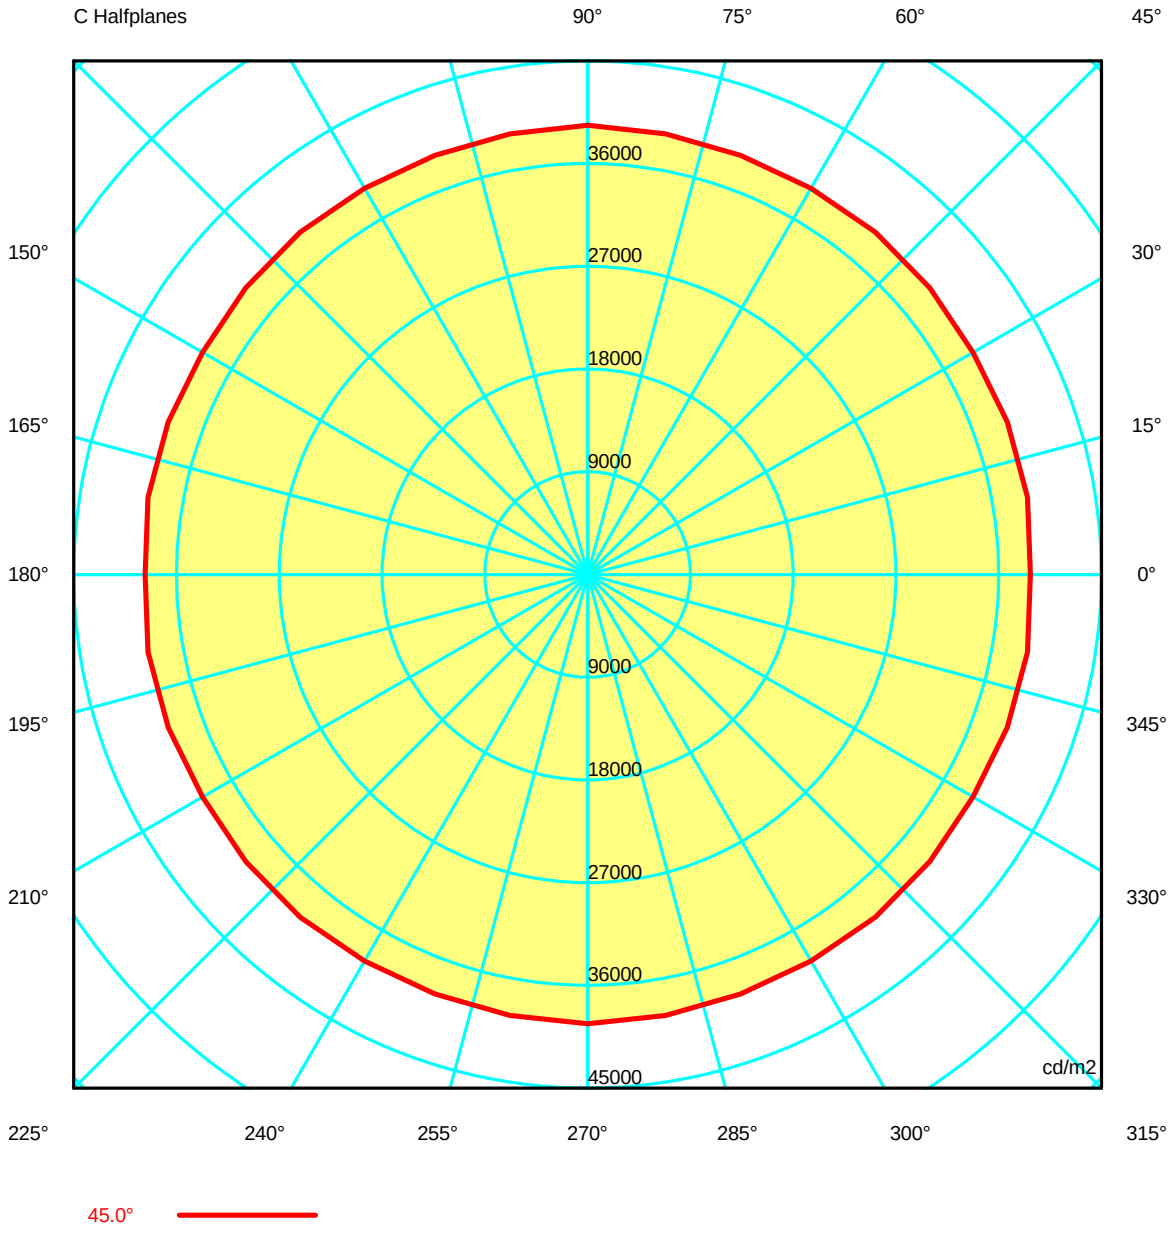

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46
G 5.0	40441.16	40433.09	40443.06	40460.19	40455.70	40443.44	40438.86	40444.54	40448.32	40449.20	40448.32	40444.54	40438.86
G 10.0	40402.05	40451.66	40441.86	40407.57	40434.35	40441.84	40411.06	40409.72	40436.70	40476.04	40436.70	40409.72	40411.06
G 15.0	40402.79	40320.90	40329.84	40390.65	40385.68	40391.35	40430.19	40436.08	40403.57	40349.08	40403.57	40436.08	40430.19
G 20.0	40195.98	40286.93	40307.67	40298.29	40298.40	40315.24	40339.23	40367.79	40381.23	40386.41	40381.23	40367.79	40339.23
G 25.0	40163.33	40040.03	40092.72	40227.65	40197.13	40194.15	40279.45	40309.36	40302.55	40292.05	40302.55	40309.36	40279.45
G 30.0	39969.31	40019.44	39980.36	39928.98	40025.20	40111.16	40122.44	40144.62	40165.78	40173.44	40165.78	40144.62	40122.44
G 35.0	39679.27	39750.79	39774.27	39766.19	39789.73	39839.48	39893.19	39932.10	39944.33	39946.71	39944.33	39932.10	39893.19
G 40.0	39622.12	39354.95	39383.02	39571.39	39520.83	39465.31	39534.24	39609.47	39653.56	39672.01	39653.56	39609.47	39534.24
G 45.0	38746.16	39092.95	39099.12	38945.22	39105.14	39186.58	39080.74	39099.42	39216.01	39358.81	39216.01	39099.42	39080.74
G 50.0	38394.88	38043.73	38045.58	38305.58	38426.10	38560.47	38780.64	38926.28	38813.05	38463.85	38813.05	38926.28	38780.64
G 55.0	37369.51	37455.07	37404.51	37341.66	37520.80	37702.87	37822.38	38029.36	38113.07	38113.77	38113.07	38029.36	37822.38
G 60.0	36189.04	36128.82	36222.09	36379.85	36394.25	36524.72	36772.01	36859.60	36908.58	37007.19	36908.58	36859.60	36772.01
G 65.0	34513.98	34591.59	34723.86	34857.52	34898.26	35004.95	35175.53	35243.70	35283.95	35351.59	35283.95	35243.70	35175.53
G 70.0	32282.88	32869.78	32919.74	32705.02	32963.11	33124.64	33051.76	33194.18	33296.83	33225.30	33296.83	33194.18	33051.76
G 75.0	30391.42	29450.53	29489.78	30174.48	30150.20	30020.45	29912.36	30051.18	30230.25	30340.30	30230.25	30051.18	29912.36
G 80.0	23900.71	25620.21	26040.44	25577.80	25754.65	25780.57	25436.34	25533.63	26322.35	27605.32	26322.35	25533.63	25436.34
G 85.0	22981.77	21519.06	22332.90	24159.64	23760.45	23855.57	25345.93	25995.50	24473.67	21143.17	24473.67	25995.50	25345.93
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46
G 5.0	40443.44	40455.70	40460.19	40443.06	40433.09	40441.16	40433.09	40443.06	40460.19	40455.70	40443.44	40438.86	40444.54
G 10.0	40441.84	40434.35	40407.57	40441.86	40451.66	40402.05	40451.66	40441.86	40407.57	40434.35	40441.84	40411.06	40409.72
G 15.0	40391.35	40385.68	40390.65	40329.84	40320.90	40402.79	40320.90	40329.84	40390.65	40385.68	40391.35	40430.19	40436.08
G 20.0	40315.24	40298.40	40298.29	40307.67	40286.93	40195.98	40286.93	40307.67	40298.29	40298.40	40315.24	40339.23	40367.79
G 25.0	40194.15	40197.13	40227.65	40092.72	40040.03	40163.33	40040.03	40092.72	40227.65	40197.13	40194.15	40279.45	40309.36
G 30.0	40111.16	40025.20	39928.98	39980.36	40019.44	39969.31	40019.44	39980.36	39928.98	40025.20	40111.16	40122.44	40144.62
G 35.0	39839.48	39789.73	39766.19	39774.27	39750.79	39679.27	39750.79	39774.27	39766.19	39789.73	39839.48	39893.19	39932.10
G 40.0	39465.31	39520.83	39571.39	39383.02	39354.95	39622.12	39354.95	39383.02	39571.39	39520.83	39465.31	39534.24	39609.47
G 45.0	39186.58	39105.14	38945.22	39099.12	39092.95	38746.16	39092.95	39099.12	38945.22	39105.14	39186.58	39080.74	39099.42
G 50.0	38560.47	38426.10	38305.58	38045.58	38043.73	38394.88	38043.73	38045.58	38305.58	38426.10	38560.47	38780.64	38926.28
G 55.0	37702.87	37520.80	37341.66	37404.51	37455.07	37369.51	37455.07	37404.51	37341.66	37520.80	37702.87	37822.38	38029.36
G 60.0	36524.72	36394.25	36379.85	36222.09	36128.82	36189.04	36128.82	36222.09	36379.85	36394.25	36524.72	36772.01	36859.60
G 65.0	35004.95	34898.26	34857.52	34723.86	34591.59	34513.98	34591.59	34723.86	34857.52	34898.26	35004.95	35175.53	35243.70
G 70.0	33124.64	32963.11	32705.02	32919.74	32869.78	32282.88	32869.78	32919.74	32705.02	32963.11	33124.64	33051.76	33194.18
G 75.0	30020.45	30150.20	30174.48	29489.78	29450.53	30391.42	29450.53	29489.78	30174.48	30150.20	30020.45	29912.36	30051.18
G 80.0	25780.57	25754.65	25577.80	26040.44	25620.21	23900.71	25620.21	26040.44	25577.80	25754.65	25780.57	25436.34	25533.63
G 85.0	23855.57	23760.45	24159.64	22332.90	21519.06	22981.77	21519.06	22332.90	24159.64	23760.45	23855.57	25345.93	25995.50
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency 100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG Double Symmetrical

Luminance cd/m2 **Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46	40461.46
G 5.0	40448.32	40449.20	40448.32	40444.54	40438.86	40443.44	40455.70	40460.19	40443.06	40433.09
G 10.0	40436.70	40476.04	40436.70	40409.72	40411.06	40441.84	40434.35	40407.57	40441.86	40451.66
G 15.0	40403.57	40349.08	40403.57	40436.08	40430.19	40391.35	40385.68	40390.65	40329.84	40320.90
G 20.0	40381.23	40386.41	40381.23	40367.79	40339.23	40315.24	40298.40	40298.29	40307.67	40286.93
G 25.0	40302.55	40292.05	40302.55	40309.36	40279.45	40194.15	40197.13	40227.65	40092.72	40040.03
G 30.0	40165.78	40173.44	40165.78	40144.62	40122.44	40111.16	40025.20	39928.98	39980.36	40019.44
G 35.0	39944.33	39946.71	39944.33	39932.10	39893.19	39839.48	39789.73	39766.19	39774.27	39750.79
G 40.0	39653.56	39672.01	39653.56	39609.47	39534.24	39465.31	39520.83	39571.39	39383.02	39354.95
G 45.0	39216.01	39358.81	39216.01	39099.42	39080.74	39186.58	39105.14	38945.22	39099.12	39092.95
G 50.0	38813.05	38463.85	38813.05	38926.28	38780.64	38560.47	38426.10	38305.58	38045.58	38043.73
G 55.0	38113.07	38113.77	38113.07	38029.36	37822.38	37702.87	37520.80	37341.66	37404.51	37455.07
G 60.0	36908.58	37007.19	36908.58	36859.60	36772.01	36524.72	36394.25	36379.85	36222.09	36128.82
G 65.0	35283.95	35351.59	35283.95	35243.70	35175.53	35004.95	34898.26	34857.52	34723.86	34591.59
G 70.0	33296.83	33225.30	33296.83	33194.18	33051.76	33124.64	32963.11	32705.02	32919.74	32869.78
G 75.0	30230.25	30340.30	30230.25	30051.18	29912.36	30020.45	30150.20	30174.48	29489.78	29450.53
G 80.0	26322.35	27605.32	26322.35	25533.63	25436.34	25780.57	25754.65	25577.80	26040.44	25620.21
G 85.0	24473.67	21143.17	24473.67	25995.50	25345.93	23855.57	23760.45	24159.64	22332.90	21519.06
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI (glare) 7.2 Tight Tilting Angle:0°

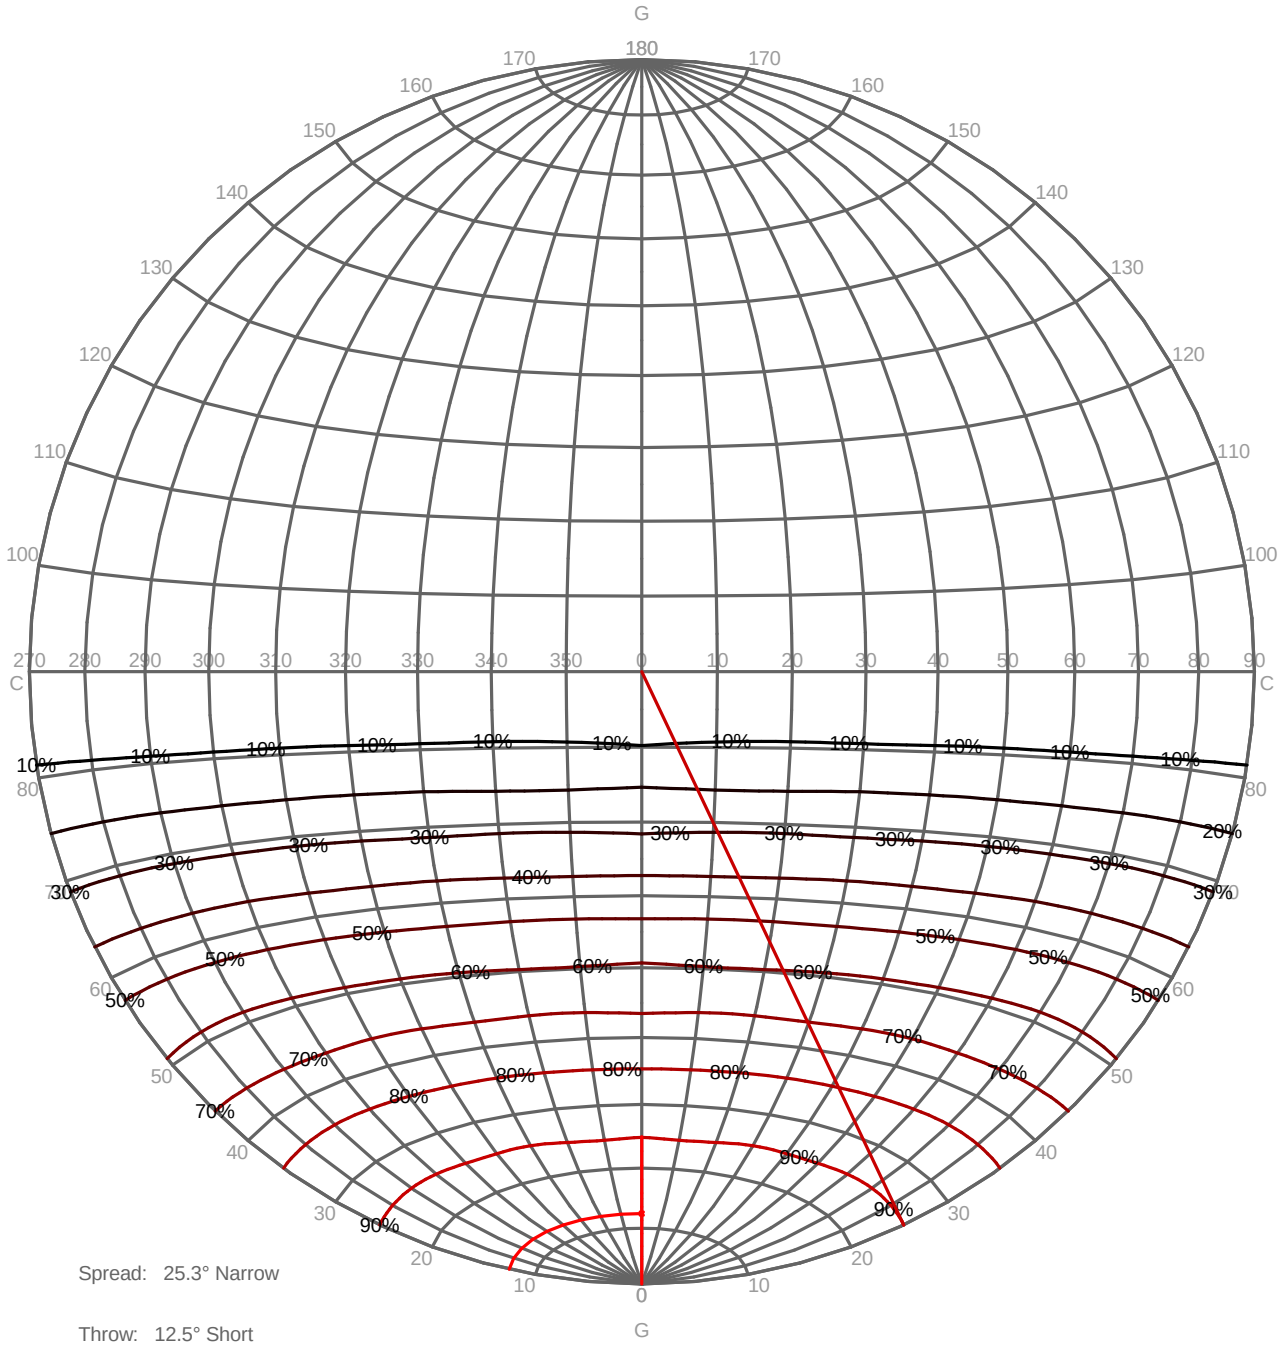

Spread: 25.3° Narrow


Throw: 12.5° Short

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V

Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

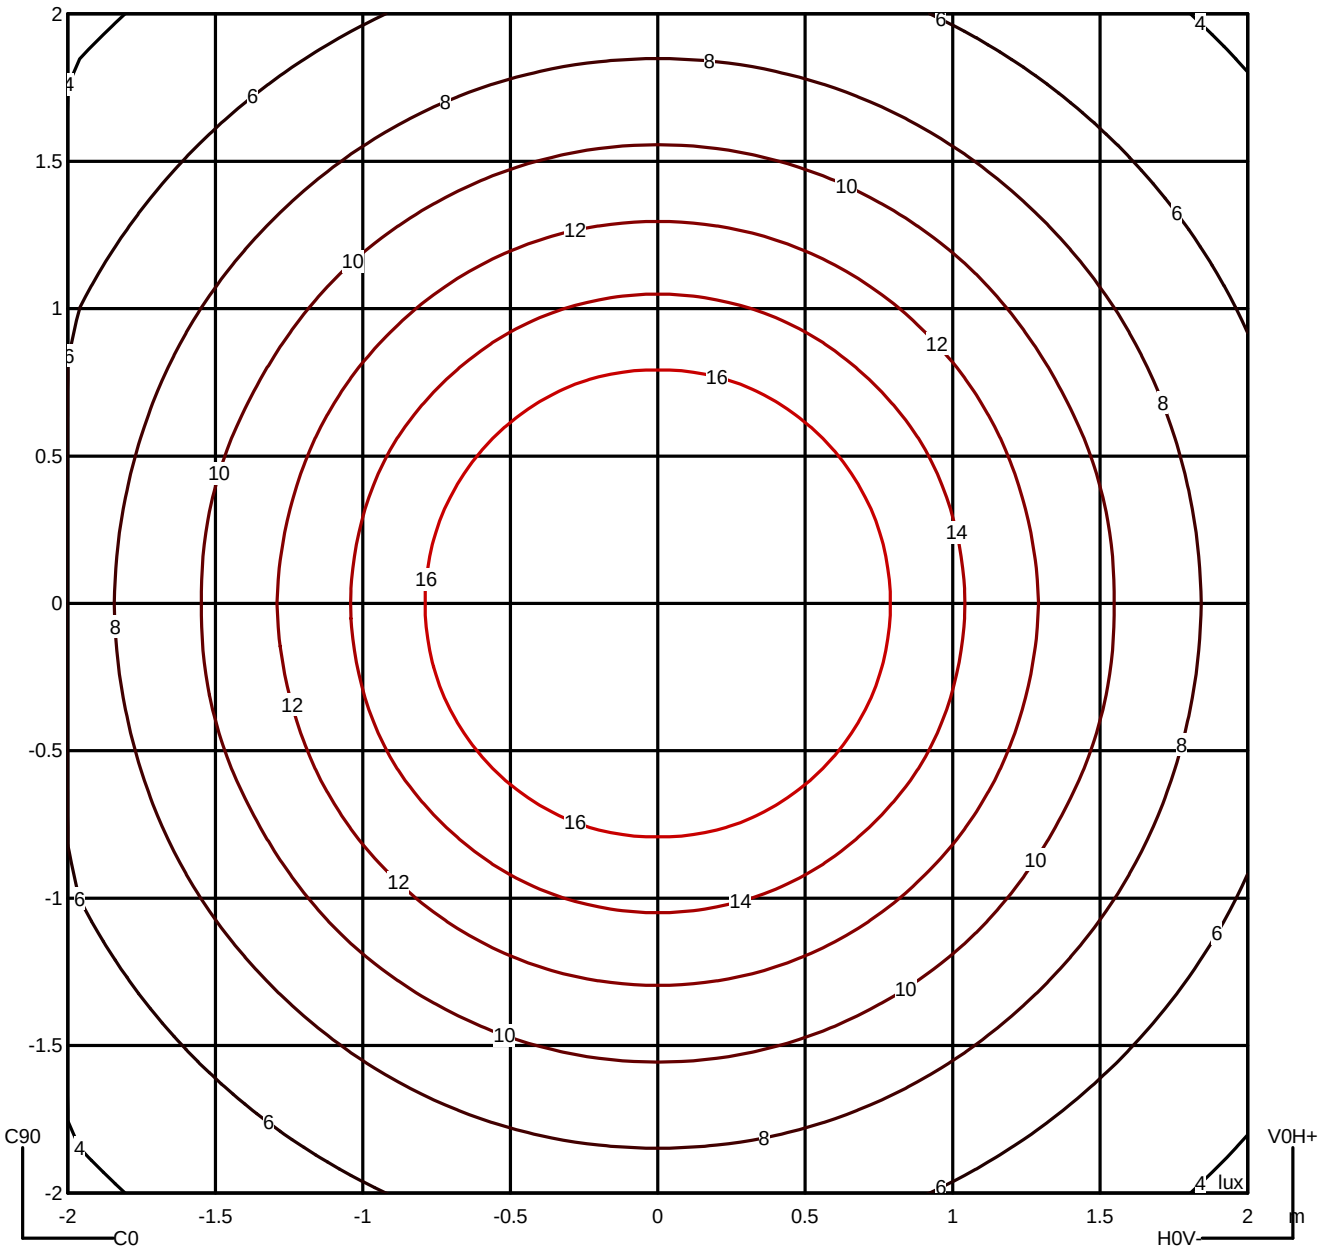

Luminaire
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V
Measurem.
Code TC-2900-SIN
Name Tira 5-LED-SMD 1m 24W 24V


Luminaire Flux	358.14 lm	Luminaire Power	24.00 W	Efficacy	14.92 lm/W	Efficiency	100.00%
Lamps Flux	358.15 lm	Maximum value	338.92 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


Average Luminance [cd/m²]


	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	38746	38395	37370	36189	34514	32283	30391	23901	22982	---
90.0°	39359	38464	38114	37007	35352	33225	30340	27605	21143	---

Flush mounted or longitudinal view

		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

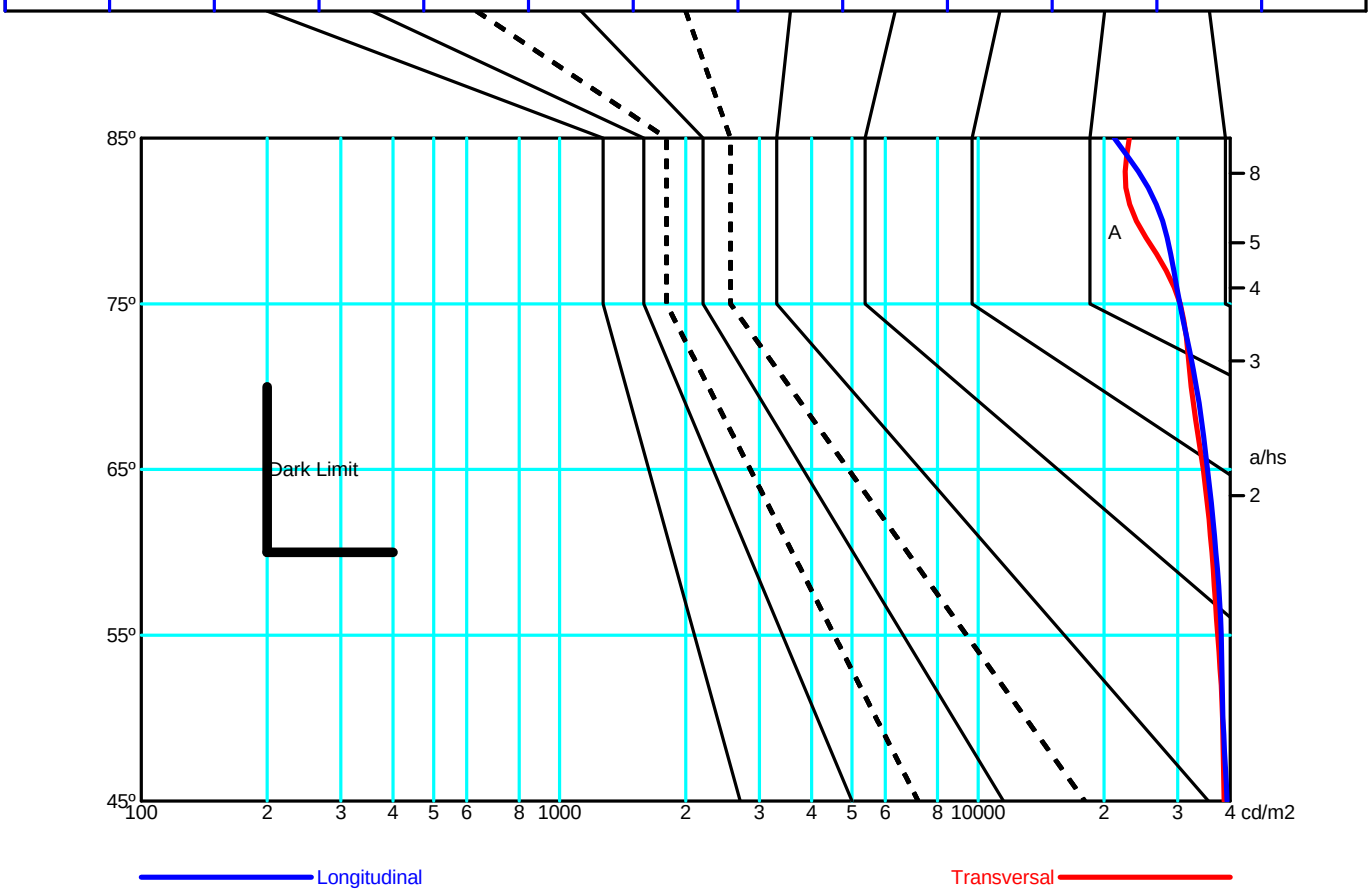

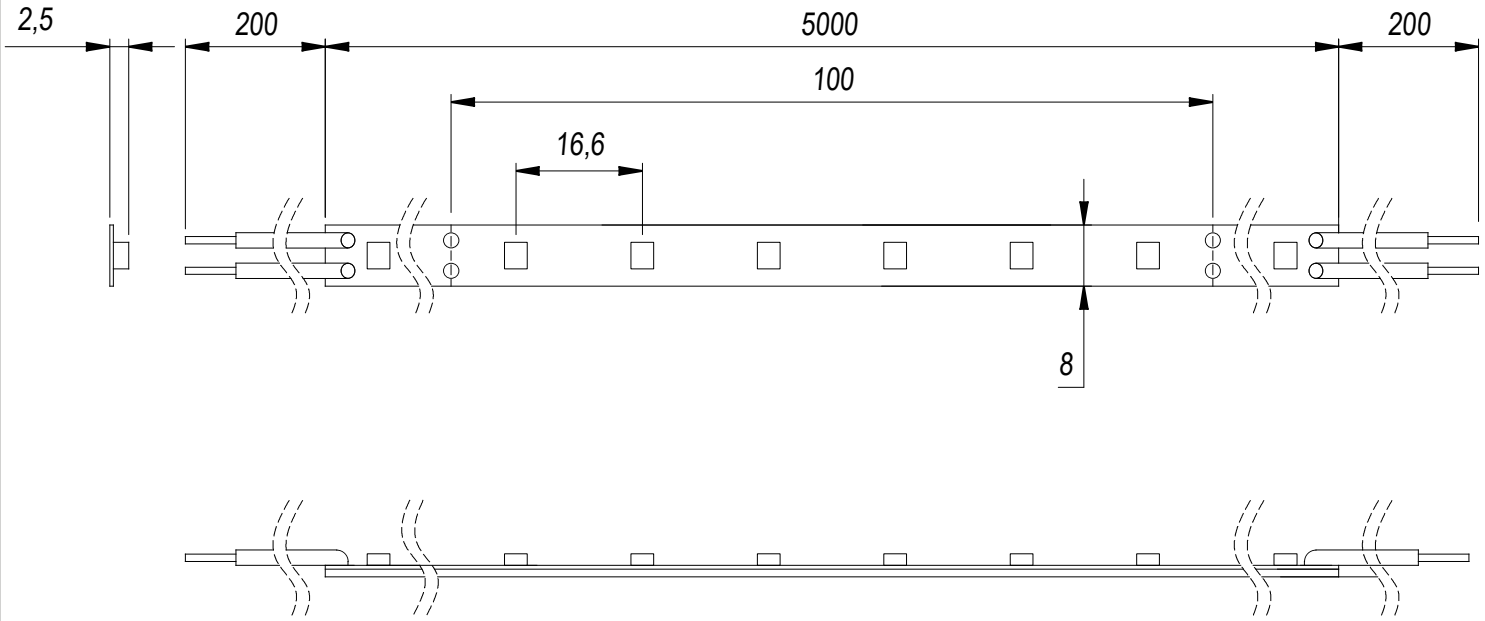


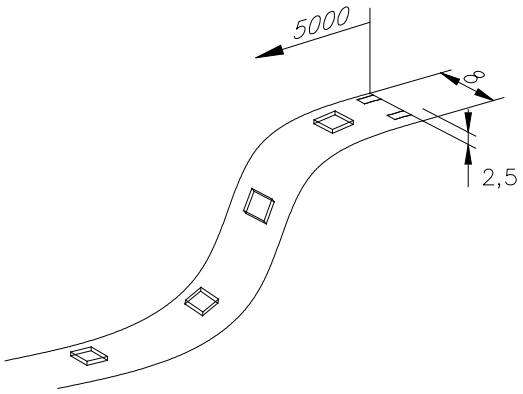

ACCESORIOS
ACCESSORIES




X2

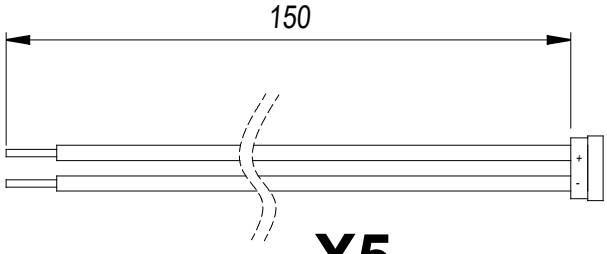



X5

Scale 1:1

02-03-2015



x5



x2

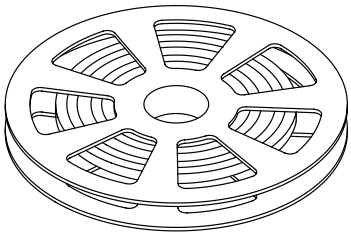





OFF




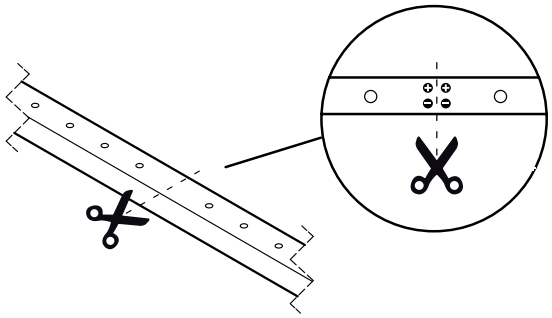

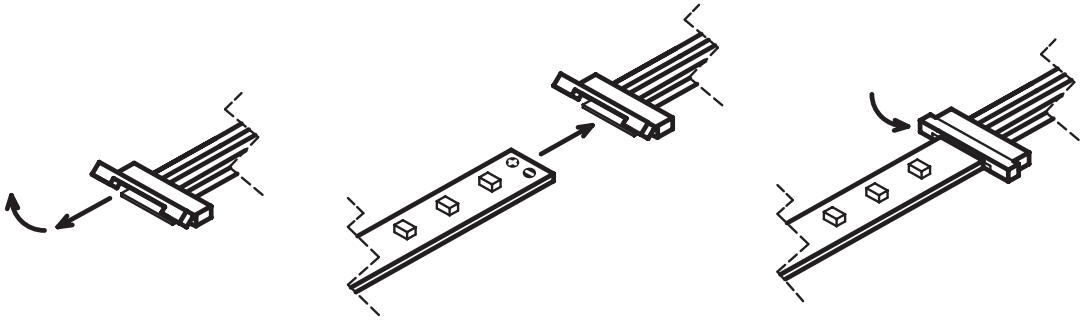


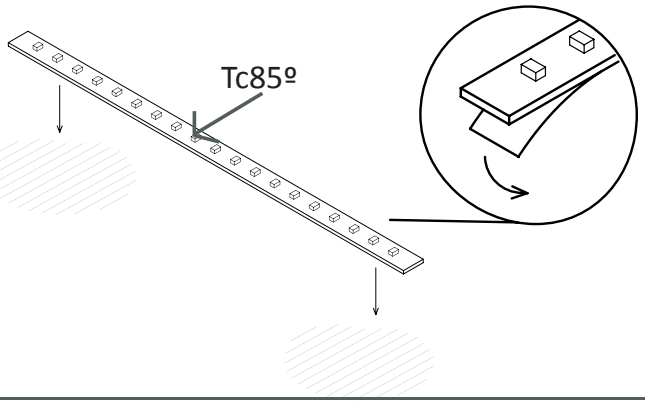
Tc85º

ON



ON / OFF

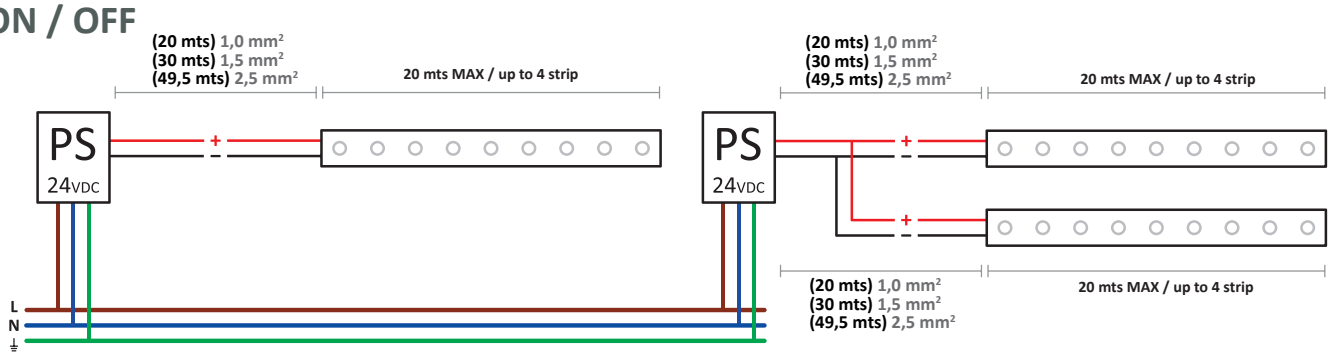
(20 mts) 1,0 mm²
(30 mts) 1,5 mm²
(49,5 mts) 2,5 mm²
20 mts MAX / up to 4 strip
PS
24VDC
+
-
L
N
⏚
(20 mts) 1,0 mm²
(30 mts) 1,5 mm²
(49,5 mts) 2,5 mm²
20 mts MAX / up to 4 strip
PS
24VDC
+
-
+
-
(20 mts) 1,0 mm²
(30 mts) 1,5 mm²
(49,5 mts) 2,5 mm²
20 mts MAX / up to 4 strip