Dixie

DE-0267-COR

Pendant IP20 Dixie E27 max. 15W copper 527lm





TECHNICAL FEATURES

IP20

Luminaire total power : 15W

Real lumens : 527

Real lm/W : 35

Structure material : Aluminium

Structure finish : copper

Recommended light bulb : E27

Voltage / frequency : 100-240V ~ 50/60Hz

Warranty : 3 Years

Easily recyclable luminaire

LUMINOTECHNIC FEATURES

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
E27	1	Max. power 15W	-



LOGISTICS

Net weight (kg): 0.31

Packaged weight (kg): 0.42

Packaging: 110mm x 110mm x 100mm

8 Un

LIGHT APPLICATION

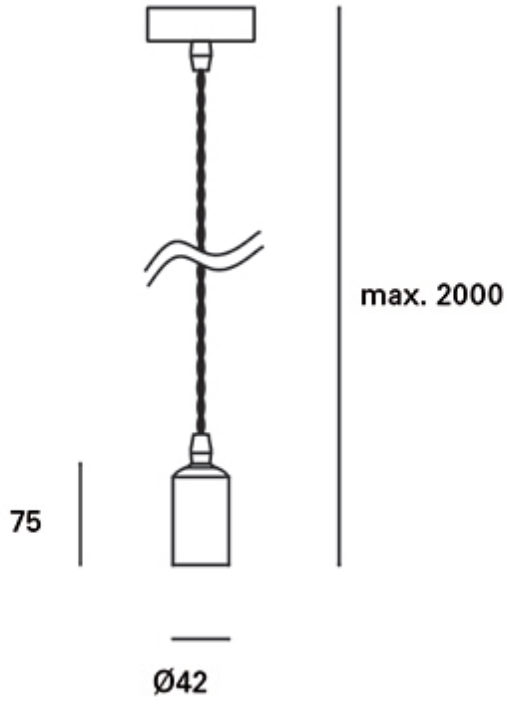

Image may not match reference. LEDS C4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature are subject to a tolerance of ±10%.

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Round Luminaire	Diam. 60 mm	Height	270 mm
Round Luminous Area	Diam. 60 mm	Height	70 mm
Horizontal Luminous Area	0.002827 m2	Emitting area on Plane 180°	0.004200 m2
Emitting area on Plane 0°	0.004200 m2	Emitting area on Plane 270°	0.004200 m2
Emitting area on Plane 90°	0.004200 m2	Glare area at 76°	0.004759 m2
Coordinate system	CG	Symmetry Type	Double Symmetrical
Date	30-03-2016	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	527.00 lm
Operator	Asselum T2	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	252026	252026	527.00	42.00	1

C.I.E.	17 43 71 52 100	D DIN 5040	C11
F UTE	0.52 J + 0.48 T	B NBN	BZ 9



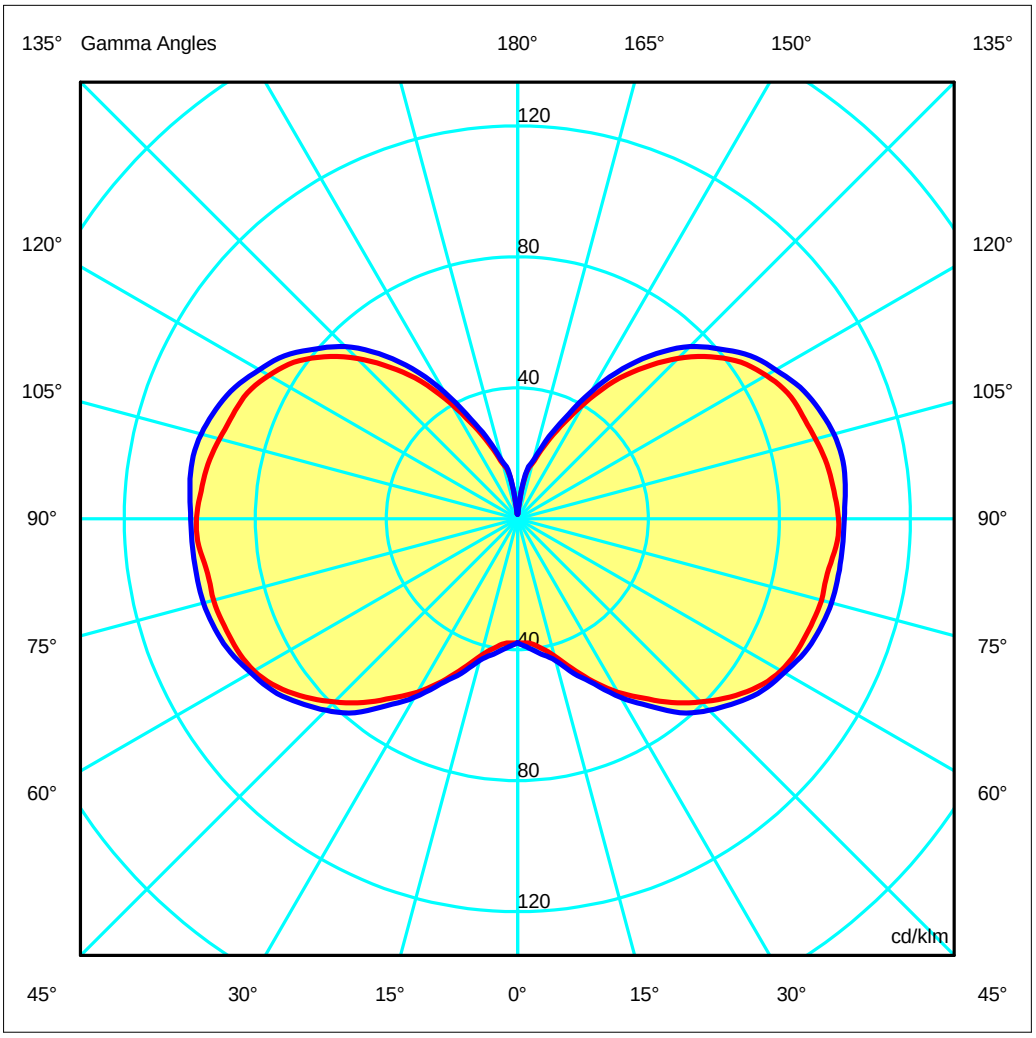

ULOR 47.63 %
DLOR 52.32 %
RN 47.65 %

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm **Table 1/1**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	37.84	37.84	37.84	37.84	37.84	37.84	37.84
G 5.0	38.08	38.11	38.44	38.10	38.10	38.64	39.58
G 10.0	39.93	39.85	40.16	39.87	39.96	40.74	41.92
G 15.0	43.31	42.76	43.13	42.77	42.94	44.25	44.80
G 20.0	48.56	47.44	48.14	47.58	47.60	48.90	50.18
G 25.0	54.83	53.61	54.07	53.34	52.73	55.11	55.67
G 30.0	61.10	59.85	60.82	59.49	59.52	62.13	63.01
G 35.0	66.82	66.33	67.16	66.21	66.13	69.56	69.66
G 40.0	73.20	72.12	73.79	73.09	73.14	76.21	77.24
G 45.0	79.06	78.11	78.90	78.61	78.85	82.18	82.69
G 50.0	84.63	83.62	83.36	83.23	83.36	86.77	87.31
G 55.0	89.50	87.99	87.10	87.61	87.12	90.22	91.38
G 60.0	92.82	90.94	89.80	90.94	89.99	93.59	94.00
G 65.0	94.48	92.62	91.40	93.13	92.82	95.44	96.65
G 70.0	95.30	93.33	91.95	94.17	94.37	96.48	98.25
G 75.0	96.06	94.10	92.50	95.08	95.08	97.11	99.23
G 80.0	96.03	95.03	93.02	95.83	95.74	97.42	99.46
G 85.0	97.60	96.49	93.56	97.11	96.08	98.13	99.58
G 90.0	98.00	97.34	93.82	98.00	96.50	98.58	99.75
G 95.0	96.97	96.89	93.28	97.25	96.47	98.96	100.41
G100.0	95.95	95.31	92.18	95.78	96.05	98.85	100.87
G105.0	94.17	93.81	90.81	94.10	94.77	97.85	100.00
G110.0	92.54	91.86	88.94	92.22	92.67	95.96	97.94
G115.0	91.02	89.94	86.90	90.27	90.27	93.66	95.14
G120.0	87.62	86.01	83.31	86.40	86.42	90.01	91.03
G125.0	83.35	81.15	78.78	81.47	82.43	85.19	86.84
G130.0	77.00	75.20	72.94	75.13	76.56	79.30	80.71
G135.0	69.34	68.14	66.45	68.34	70.23	72.04	74.46
G140.0	60.43	59.97	59.34	60.76	61.81	63.82	65.86
G145.0	51.22	50.34	50.43	51.13	52.60	53.93	55.97
G150.0	40.69	41.21	41.05	41.26	42.16	43.09	44.79
G155.0	31.20	30.97	31.19	31.24	31.58	32.90	33.64
G160.0	23.58	23.61	23.50	23.52	23.29	23.88	25.33
G165.0	17.60	17.19	17.44	17.30	17.24	18.05	18.33
G170.0	12.93	11.72	11.54	11.09	12.71	12.92	13.76
G175.0	1.69	4.11	1.47	3.23	1.54	4.08	1.63
G180.0	1.38	1.38	1.38	1.38	1.38	1.38	1.38

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Diam=60mm



C Halfplanes

180.0 0.0

270.0 90.0

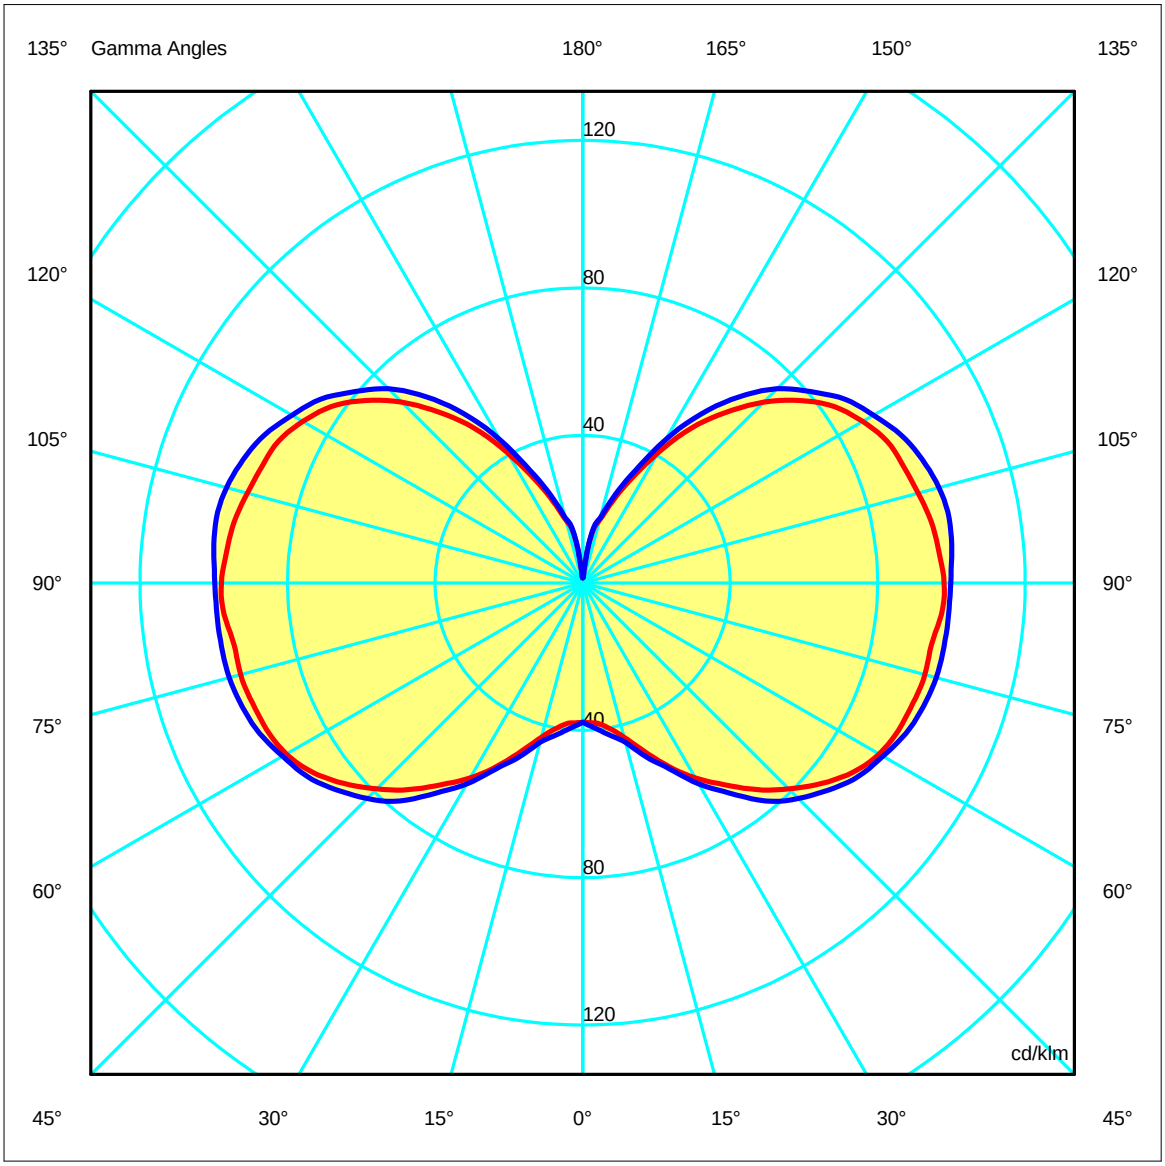

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Gamma 0-180 beyond limit of 89 degrees

Gamma 0-180 beyond limit of 89 degrees

Gamma 0-180 beyond limit of 89 degrees

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.9	17.9	17.8	18.8	20.1	17.0	18.0	17.9	18.9	20.1
x=2H y=3H	19.7	20.6	20.6	21.5	22.9	19.9	20.8	20.8	21.7	22.9
x=2H y=4H	21.1	22.0	22.0	22.9	24.3	21.3	22.2	22.2	23.1	24.3
x=2H y=6H	22.5	23.3	23.4	24.3	25.7	22.7	23.5	23.6	24.5	25.7
x=2H y=8H	23.2	24.0	24.1	24.9	26.4	23.4	24.2	24.3	25.1	26.4
x=2H y=12H	23.9	24.6	24.8	25.6	27.0	24.1	24.8	25.0	25.8	27.0
x=4H y=2H	17.9	18.8	18.8	19.7	21.0	18.0	18.9	18.9	19.8	21.0
x=4H y=3H	20.8	21.5	21.7	22.5	23.9	20.9	21.7	21.9	22.6	23.9
x=4H y=4H	22.3	23.0	23.2	23.9	25.4	22.5	23.2	23.4	24.1	25.4
x=4H y=6H	23.8	24.5	24.8	25.4	26.9	24.0	24.6	25.0	25.6	26.9
x=4H y=8H	24.6	25.2	25.6	26.2	27.7	24.8	25.4	25.8	26.4	27.7
x=4H y=12H	25.4	25.9	26.4	26.9	28.4	25.6	26.1	26.6	27.1	28.4
x=8H y=4H	22.9	23.5	23.9	24.5	25.9	23.1	23.6	24.0	24.6	25.9
x=8H y=6H	24.7	25.2	25.7	26.2	27.6	24.8	25.3	25.8	26.3	27.6
x=8H y=8H	25.6	26.0	26.6	27.0	28.5	25.8	26.2	26.8	27.2	28.5
x=8H y=12H	26.6	26.9	27.6	28.0	29.5	26.7	27.1	27.7	28.1	29.5
x=12H y=4H	23.0	23.6	24.0	24.6	26.0	23.2	23.7	24.2	24.7	26.0
x=12H y=6H	24.9	25.3	25.9	26.3	27.8	25.0	25.5	26.1	26.5	27.8
x=12H y=8H	25.9	26.3	26.9	27.3	28.8	26.1	26.4	27.1	27.5	28.8

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Diam=60mm



C Halfplanes

180.0 0.0
270.0 90.0

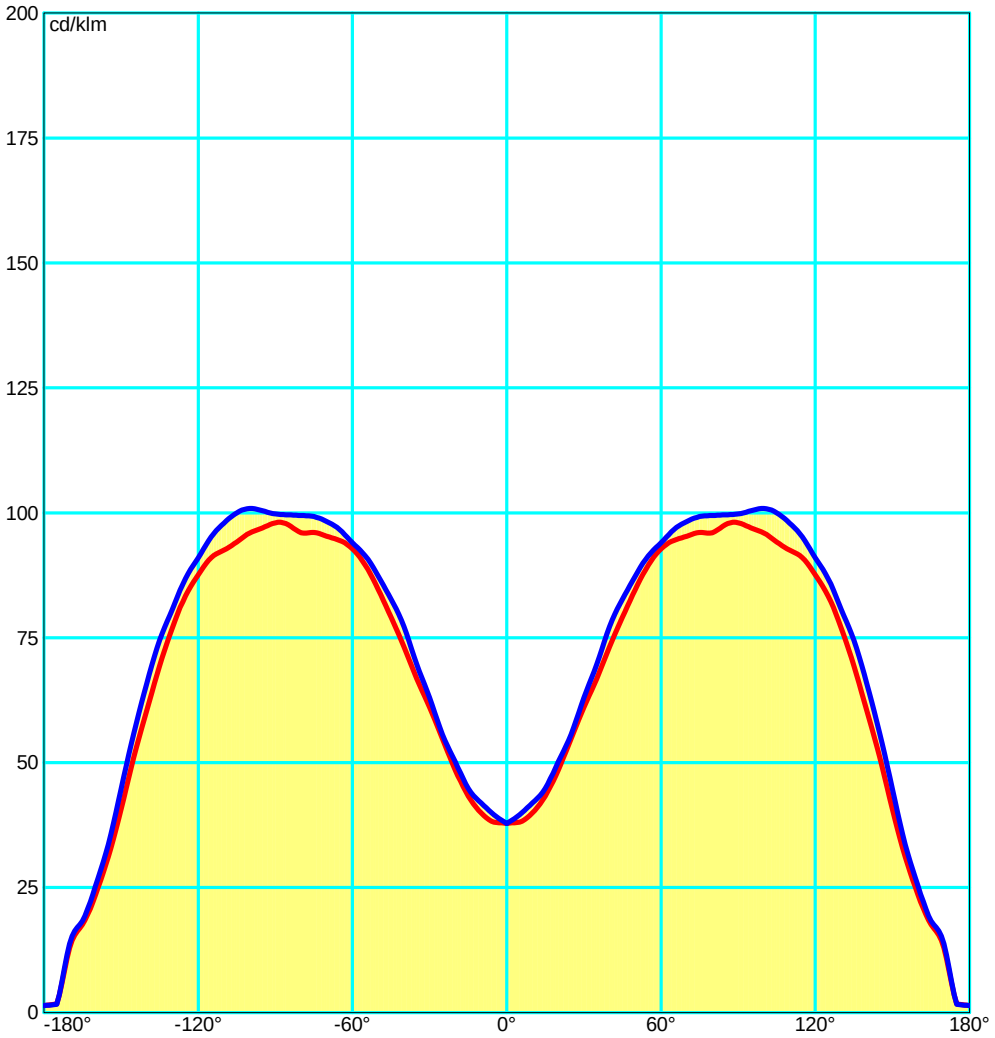

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Luminance

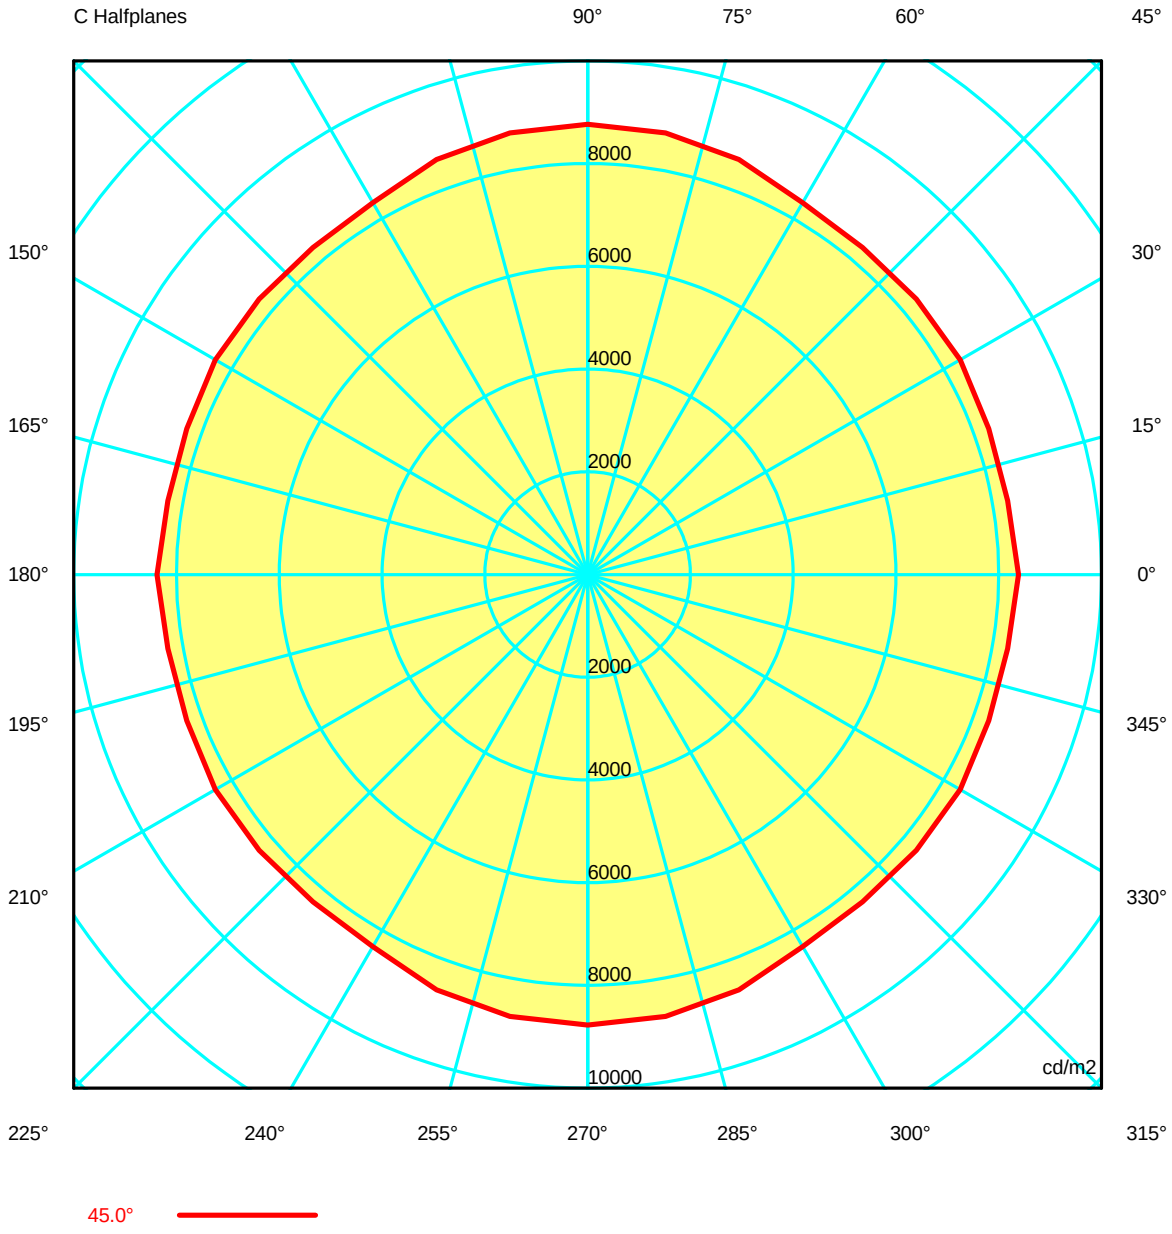

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96
G 5.0	6306.17	6308.96	6332.02	6366.12	6332.77	6297.88	6308.85	6360.04	6446.33	6554.57	6446.33	6360.04	6308.85
G 10.0	5989.71	5972.40	5993.84	6024.41	5998.14	5972.21	5993.30	6062.46	6166.59	6288.62	6166.59	6062.46	5993.30
G 15.0	5978.99	5912.09	5915.53	5953.81	5926.68	5892.77	5927.25	6048.24	6147.24	6184.58	6147.24	6048.24	5927.25
G 20.0	6252.50	6128.09	6129.54	6198.25	6150.24	6106.46	6128.63	6232.68	6354.39	6460.71	6354.39	6232.68	6128.63
G 25.0	6662.00	6539.67	6523.08	6569.44	6530.49	6427.58	6406.59	6596.93	6719.40	6764.79	6719.40	6596.93	6406.59
G 30.0	7079.21	6949.79	6968.56	7046.77	6957.42	6853.90	6897.00	7100.35	7258.82	7300.41	7258.82	7100.35	6897.00
G 35.0	7452.60	7396.49	7428.44	7490.76	7436.68	7341.64	7376.23	7639.74	7762.34	7769.64	7762.34	7639.74	7376.23
G 40.0	7929.33	7814.46	7863.19	7992.60	7942.51	7883.11	7922.03	8145.04	8322.03	8366.31	8322.03	8145.04	7922.03
G 45.0	8385.20	8297.20	8303.98	8368.21	8347.84	8314.85	8362.42	8603.50	8733.67	8769.81	8733.67	8603.50	8362.42
G 50.0	8858.49	8781.32	8743.86	8725.67	8723.95	8690.17	8725.33	8967.83	9101.90	9139.09	9101.90	8967.83	8725.33
G 55.0	9317.81	9212.33	9113.15	9068.15	9114.18	9103.82	9069.77	9276.58	9463.86	9513.86	9463.86	9276.58	9069.77
G 60.0	9684.88	9555.27	9423.10	9369.42	9467.42	9447.20	9389.31	9633.87	9779.74	9808.38	9779.74	9633.87	9389.31
G 65.0	9955.62	9828.46	9688.39	9631.33	9762.19	9807.87	9780.90	9953.95	10124.52	10184.13	10124.52	9953.95	9780.90
G 70.0	10221.41	10086.47	9928.72	9861.73	10022.98	10107.43	10121.38	10258.10	10422.36	10537.78	10422.36	10258.10	10121.38
G 75.0	10572.29	10438.87	10262.17	10180.24	10372.42	10463.48	10463.51	10592.88	10773.47	10921.06	10773.47	10592.88	10463.51
G 80.0	10937.12	10889.85	10717.63	10594.09	10806.92	10940.93	10904.30	11009.06	11177.49	11327.79	11177.49	11009.06	10904.30
G 85.0	11610.00	11568.60	11323.23	11128.78	11417.70	11552.53	11428.57	11563.24	11752.32	11845.62	11752.32	11563.24	11428.57
G 90.0	12297.02	12241.69	12025.03	11772.07	12132.29	12290.10	12108.37	12249.39	12448.60	12516.19	12448.60	12249.39	12108.37

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96
G 5.0	6297.88	6332.77	6366.12	6332.02	6308.96	6306.17	6308.96	6332.02	6366.12	6332.77	6297.88	6308.85	6360.04
G 10.0	5972.21	5998.14	6024.41	5993.84	5972.40	5989.71	5972.40	5993.84	6024.41	5998.14	5972.21	5993.30	6062.46
G 15.0	5892.77	5926.68	5953.81	5915.53	5912.09	5978.99	5912.09	5915.53	5953.81	5926.68	5892.77	5927.25	6048.24
G 20.0	6106.46	6150.24	6198.25	6129.54	6128.09	6252.50	6128.09	6129.54	6198.25	6150.24	6106.46	6128.63	6232.68
G 25.0	6427.58	6530.49	6569.44	6523.08	6539.67	6662.00	6539.67	6523.08	6569.44	6530.49	6427.58	6406.59	6596.93
G 30.0	6853.90	6957.42	7046.77	6968.56	6949.79	7079.21	6949.79	6968.56	7046.77	6957.42	6853.90	6897.00	7100.35
G 35.0	7341.64	7436.68	7490.76	7428.44	7396.49	7452.60	7396.49	7428.44	7490.76	7436.68	7341.64	7376.23	7639.74
G 40.0	7883.11	7942.51	7992.60	7863.19	7814.46	7929.33	7814.46	7863.19	7992.60	7942.51	7883.11	7922.03	8145.04
G 45.0	8314.85	8347.84	8368.21	8303.98	8297.20	8385.20	8297.20	8303.98	8368.21	8347.84	8314.85	8362.42	8603.50
G 50.0	8690.17	8723.95	8725.67	8743.86	8781.32	8858.49	8781.32	8743.86	8725.67	8723.95	8690.17	8725.33	8967.83
G 55.0	9103.82	9114.18	9068.15	9113.15	9212.33	9317.81	9212.33	9113.15	9068.15	9114.18	9103.82	9069.77	9276.58
G 60.0	9447.20	9467.42	9369.42	9423.10	9555.27	9684.88	9555.27	9423.10	9369.42	9467.42	9447.20	9389.31	9633.87
G 65.0	9807.87	9762.19	9631.33	9688.39	9828.46	9955.62	9828.46	9688.39	9631.33	9762.19	9807.87	9780.90	9953.95
G 70.0	10107.43	10022.98	9861.73	9928.72	10086.47	10221.41	10086.47	9928.72	9861.73	10022.98	10107.43	10121.38	10258.10
G 75.0	10463.48	10372.42	10180.24	10262.17	10438.87	10572.29	10438.87	10262.17	10180.24	10372.42	10463.48	10463.51	10592.88
G 80.0	10940.93	10806.92	10594.09	10717.63	10889.85	10937.12	10889.85	10717.63	10594.09	10806.92	10940.93	10904.30	11009.06
G 85.0	11552.53	11417.70	11128.78	11323.23	11568.60	11610.00	11568.60	11323.23	11128.78	11417.70	11552.53	11428.57	11563.24
G 90.0	12290.10	12132.29	11772.07	12025.03	12241.69	12297.02	12241.69	12025.03	11772.07	12132.29	12290.10	12108.37	12249.39

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency 99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG Double Symmetrical

Luminance cd/m2 **Table 3/3**

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96	7053.96
G 5.0	6446.33	6554.57	6446.33	6360.04	6308.85	6297.88	6332.77	6366.12	6332.02	6308.96
G 10.0	6166.59	6288.62	6166.59	6062.46	5993.30	5972.21	5998.14	6024.41	5993.84	5972.40
G 15.0	6147.24	6184.58	6147.24	6048.24	5927.25	5892.77	5926.68	5953.81	5915.53	5912.09
G 20.0	6354.39	6460.71	6354.39	6232.68	6128.63	6106.46	6150.24	6198.25	6129.54	6128.09
G 25.0	6719.40	6764.79	6719.40	6596.93	6406.59	6427.58	6530.49	6569.44	6523.08	6539.67
G 30.0	7258.82	7300.41	7258.82	7100.35	6897.00	6853.90	6957.42	7046.77	6968.56	6949.79
G 35.0	7762.34	7769.64	7762.34	7639.74	7376.23	7341.64	7436.68	7490.76	7428.44	7396.49
G 40.0	8322.03	8366.31	8322.03	8145.04	7922.03	7883.11	7942.51	7992.60	7863.19	7814.46
G 45.0	8733.67	8769.81	8733.67	8603.50	8362.42	8314.85	8347.84	8368.21	8303.98	8297.20
G 50.0	9101.90	9139.09	9101.90	8967.83	8725.33	8690.17	8723.95	8725.67	8743.86	8781.32
G 55.0	9463.86	9513.86	9463.86	9276.58	9069.77	9103.82	9114.18	9068.15	9113.15	9212.33
G 60.0	9779.74	9808.38	9779.74	9633.87	9389.31	9447.20	9467.42	9369.42	9423.10	9555.27
G 65.0	10124.52	10184.13	10124.52	9953.95	9780.90	9807.87	9762.19	9631.33	9688.39	9828.46
G 70.0	10422.36	10537.78	10422.36	10258.10	10121.38	10107.43	10022.98	9861.73	9928.72	10086.47
G 75.0	10773.47	10921.06	10773.47	10592.88	10463.51	10463.48	10372.42	10180.24	10262.17	10438.87
G 80.0	11177.49	11327.79	11177.49	11009.06	10904.30	10940.93	10806.92	10594.09	10717.63	10889.85
G 85.0	11752.32	11845.62	11752.32	11563.24	11428.57	11552.53	11417.70	11128.78	11323.23	11568.60
G 90.0	12448.60	12516.19	12448.60	12249.39	12108.37	12290.10	12132.29	11772.07	12025.03	12241.69

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area Tilting Angle:0°

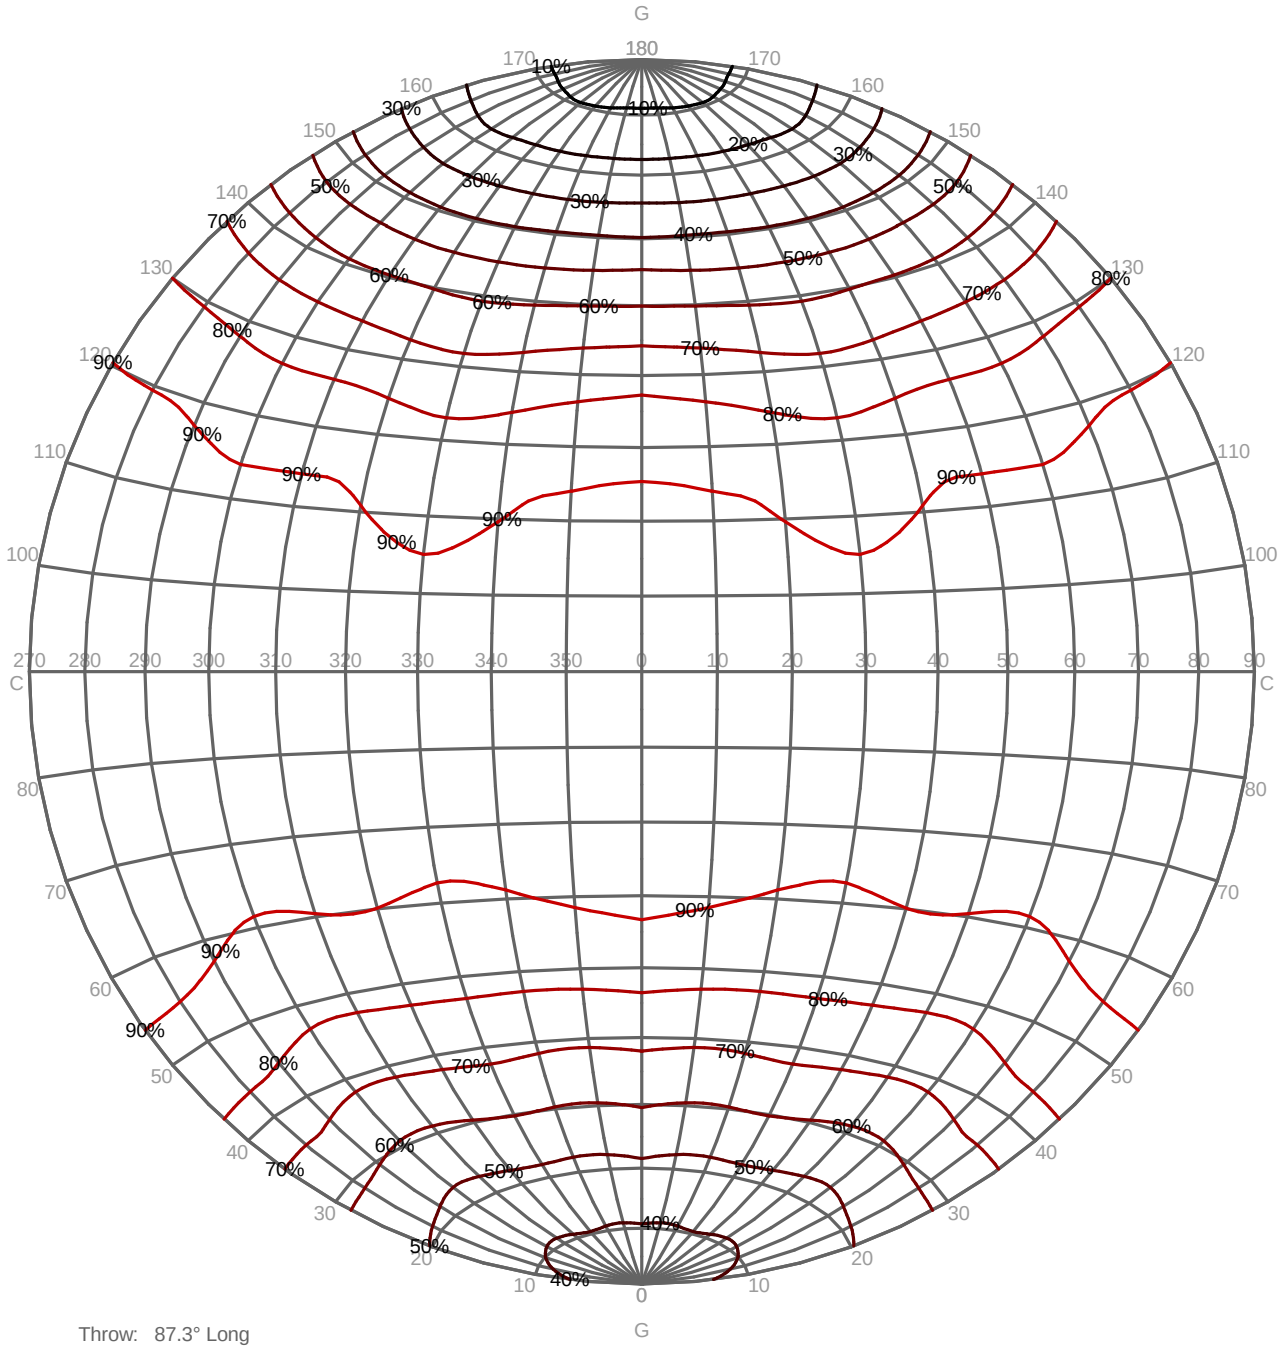

Throw: 87.3° Long

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

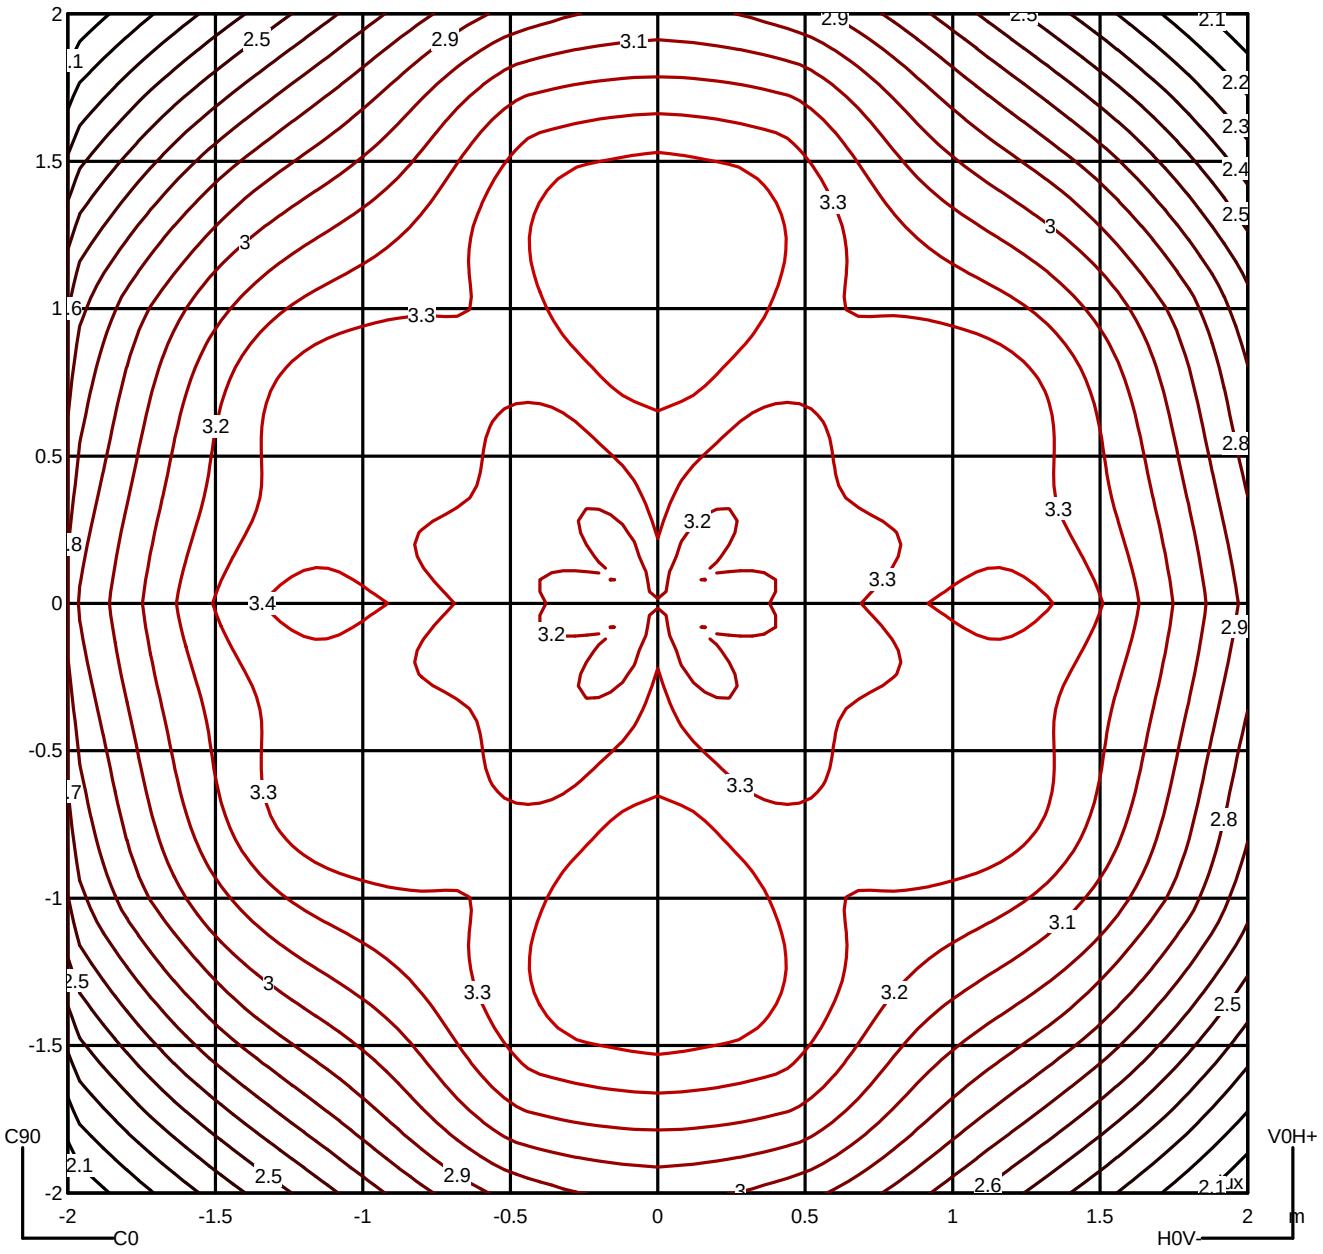

Luminaire
Code DE-0267-COR
Name Colgante DIXIE 60W IA E27
Measurem.
Code DE-0267-ORO
Name Colgante DIXIE 60W IA E27

Luminaire Flux	526.74 lm	Luminaire Power	42.00 W	Efficacy	12.54 lm/W	Efficiency	99.95%
Lamps Flux	527.00 lm	Maximum value	100.87 cd/klm	Position	C=90.00 G=100.00	CG	Double Symmetrical

Average Luminance [cd/m²]

	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	8385	8858	9318	9685	9956	10221	10572	10937	11610	---
90.0°	8770	9139	9514	9808	10184	10538	10921	11328	11846	---

Flush mounted or transveral view

		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

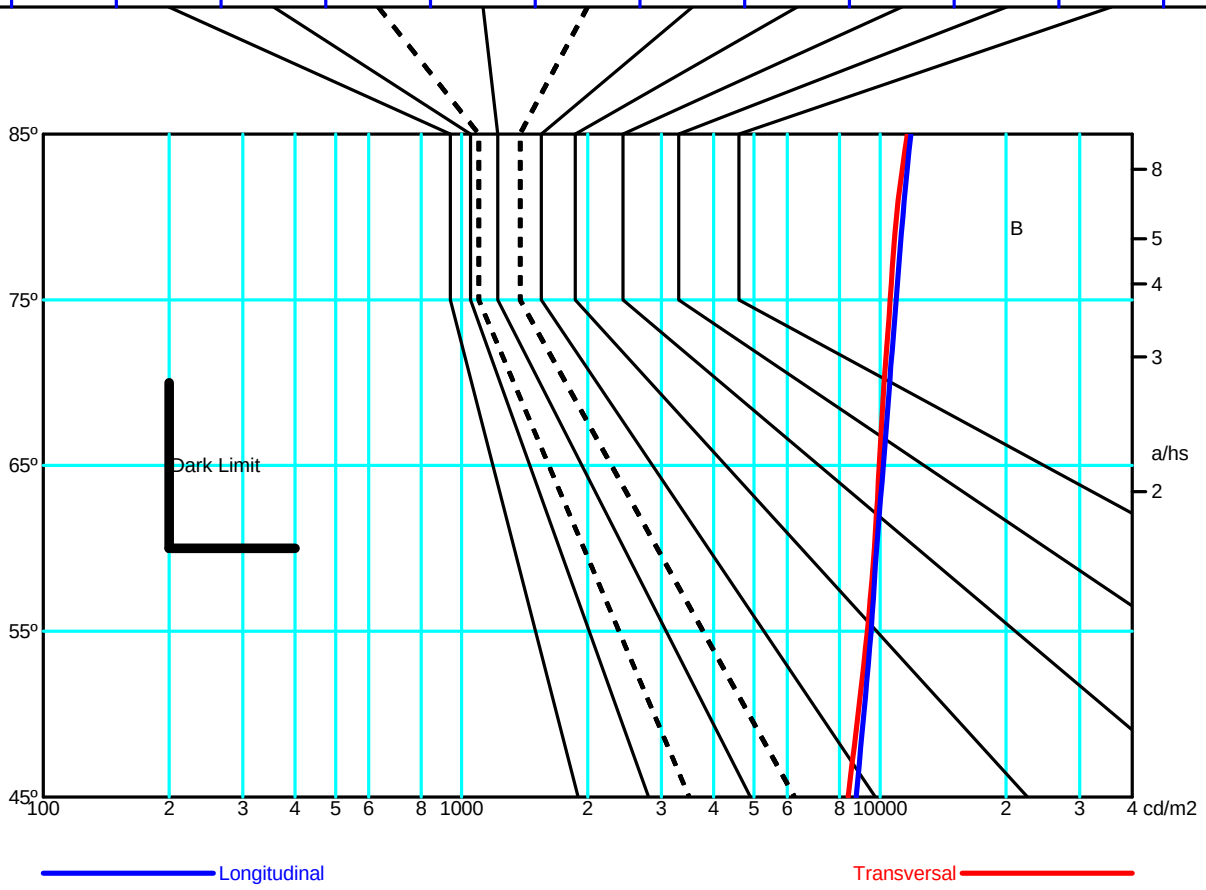

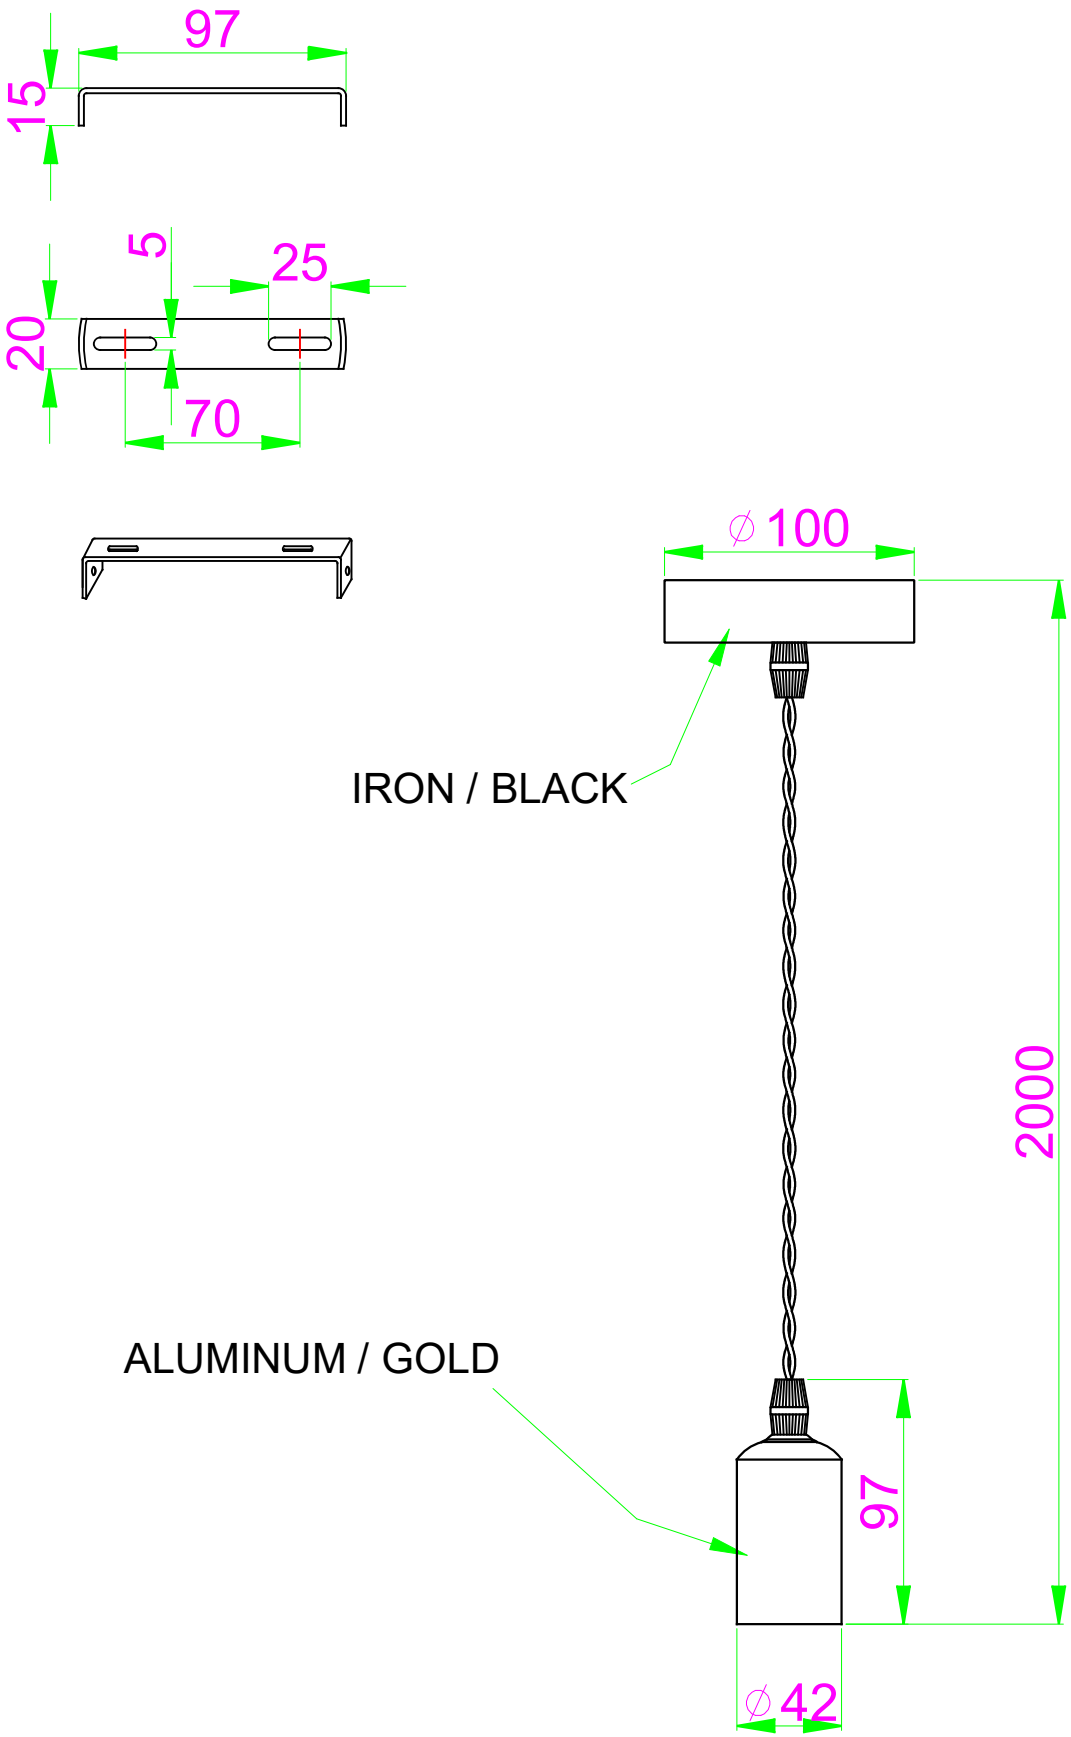
97
15
5
25
20
70
∅100
IRON / BLACK
2000
ALUMINUM / GOLD
97
∅42

Dixie

DE-0267

