

TECHNICAL FEATURES

IP55 IK09



Luminaire total power : 15W

Structure material : Stainless steel AISI202

Structure finish : Brown

Diffuser material : Polycarbonate

Diffuser finish : Opal

Max. size of light bulb : 167/55 mm

Recommended light bulb : E27


Voltage / frequency : 100-240V ~ 50/60Hz

Warranty : 2 Years

Easily recyclable luminaire

LUMINOTECHNIC FEATURES

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
E27	1	Max. power 15W	-



LOGISTICS


Net weight (kg): 1.01

Packaged weight (kg): 1.46

Packaging: 135mm x 135mm x 810mm



4 Un

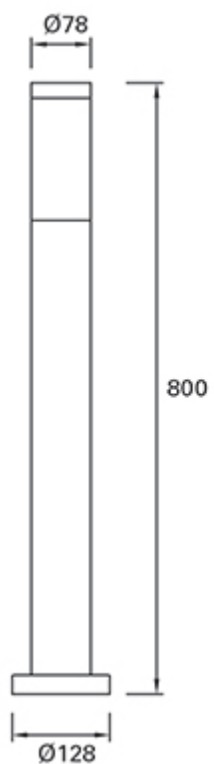

Luminaire

Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL


Measurement

Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam.	80 mm	Height	800 mm		
		Diam.	80 mm	Height	160 mm		
Horizontal Luminous Area	0.005027 m2	Emitting area on Plane 180°	0.012800 m2	Emitting area on Plane 270°	0.012800 m2	Glare area at 76°	0.013636 m2
Coordinate system	CG	Symmetry Type	Asymmetrical				
Date	23-03-2016	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1485.00 lm				
Operator		Source Voltage [V]					
Temperature	25.00 °C	Source current [A]					
Humidity	60.00 %	Photocell					
Notes							

Line	Code	Luminaire Lamps	Flux [lm]	Pow. [W]	Q.ty
	PL ELEC23W/827 E27	Name PL ELEC23W/827 E27	1485.00	23.00	1
C.I.E.	13 38 68 46 50	D DIN 5040	C12		
F UTE	--	B NBN	BZ 10		


Diam=80mm



Semiplanos C

180.0 — 0.0
 270.0 — 90.0

ULOR 26.90 %
 DLOR 23.34 %
 RN 53.55 %

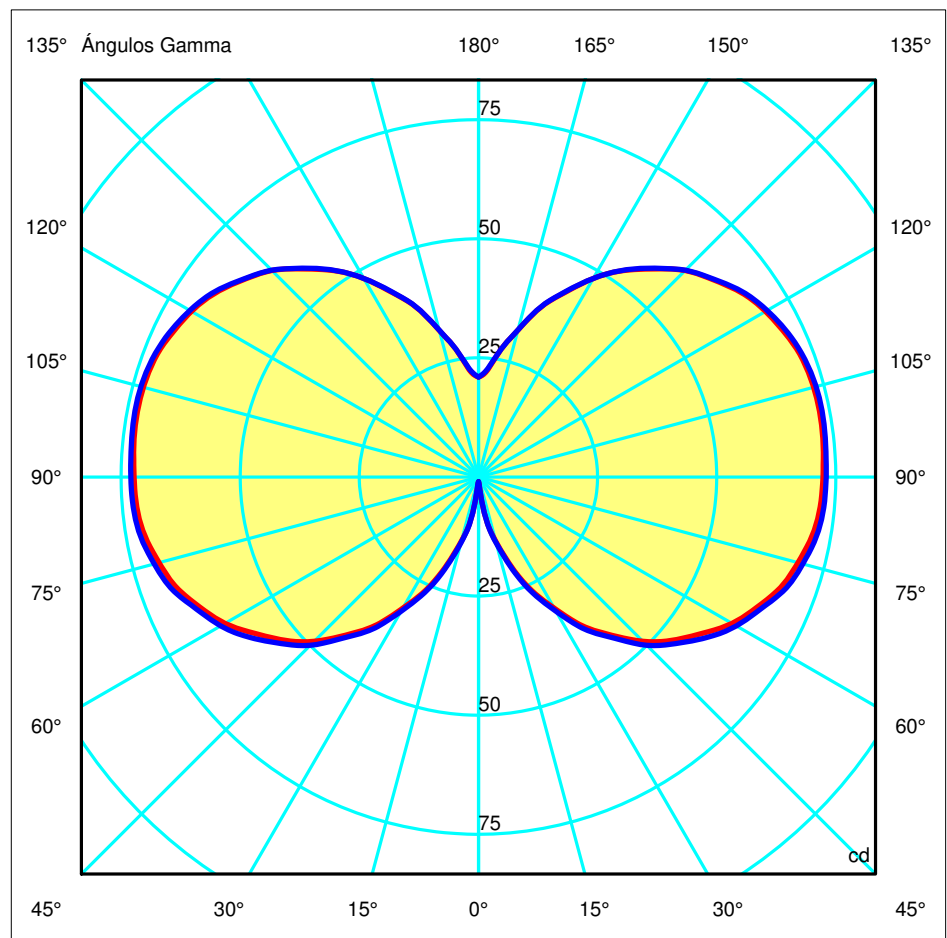

Luminaire

Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL

Measurerm.



Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

Diam=80mm

Semiplanos C

180.0 ——— 0.0
 270.0 ——— 90.0

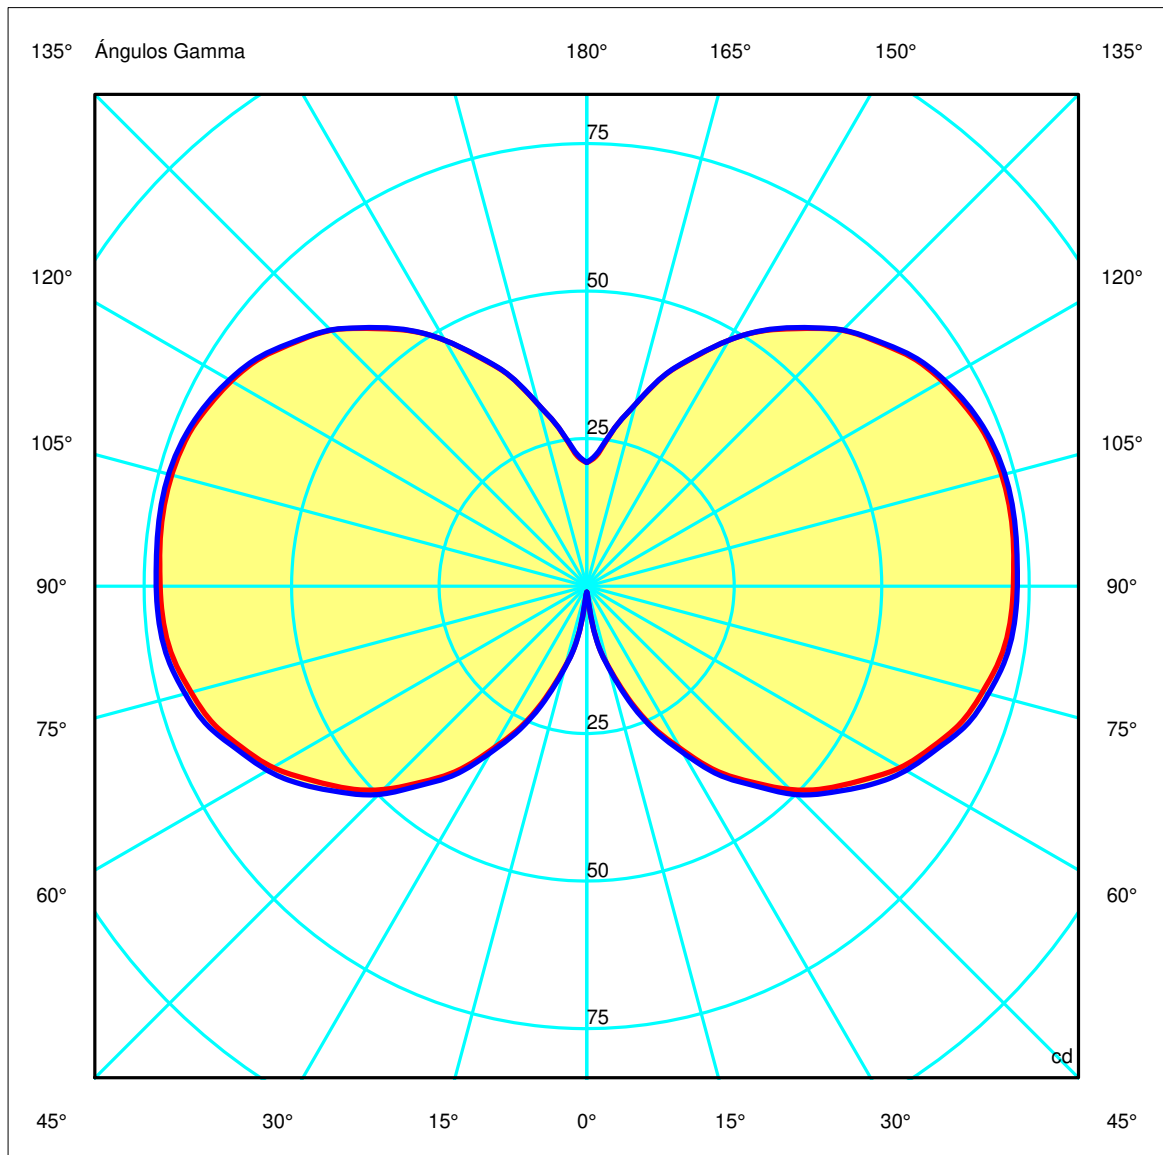



Luminaire

Code PX-0100-MAR
Name Baliza KORAL 1x23W E27 CFL

Measurem.

Code PX-0099-BLA
Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

Apertura a la izquierda no hallada, gamma =-79

Apertura a la izquierda no hallada, gamma =-79

Apertura a la izquierda no hallada, gamma =-79

Luminaire

Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL


Measur.

Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

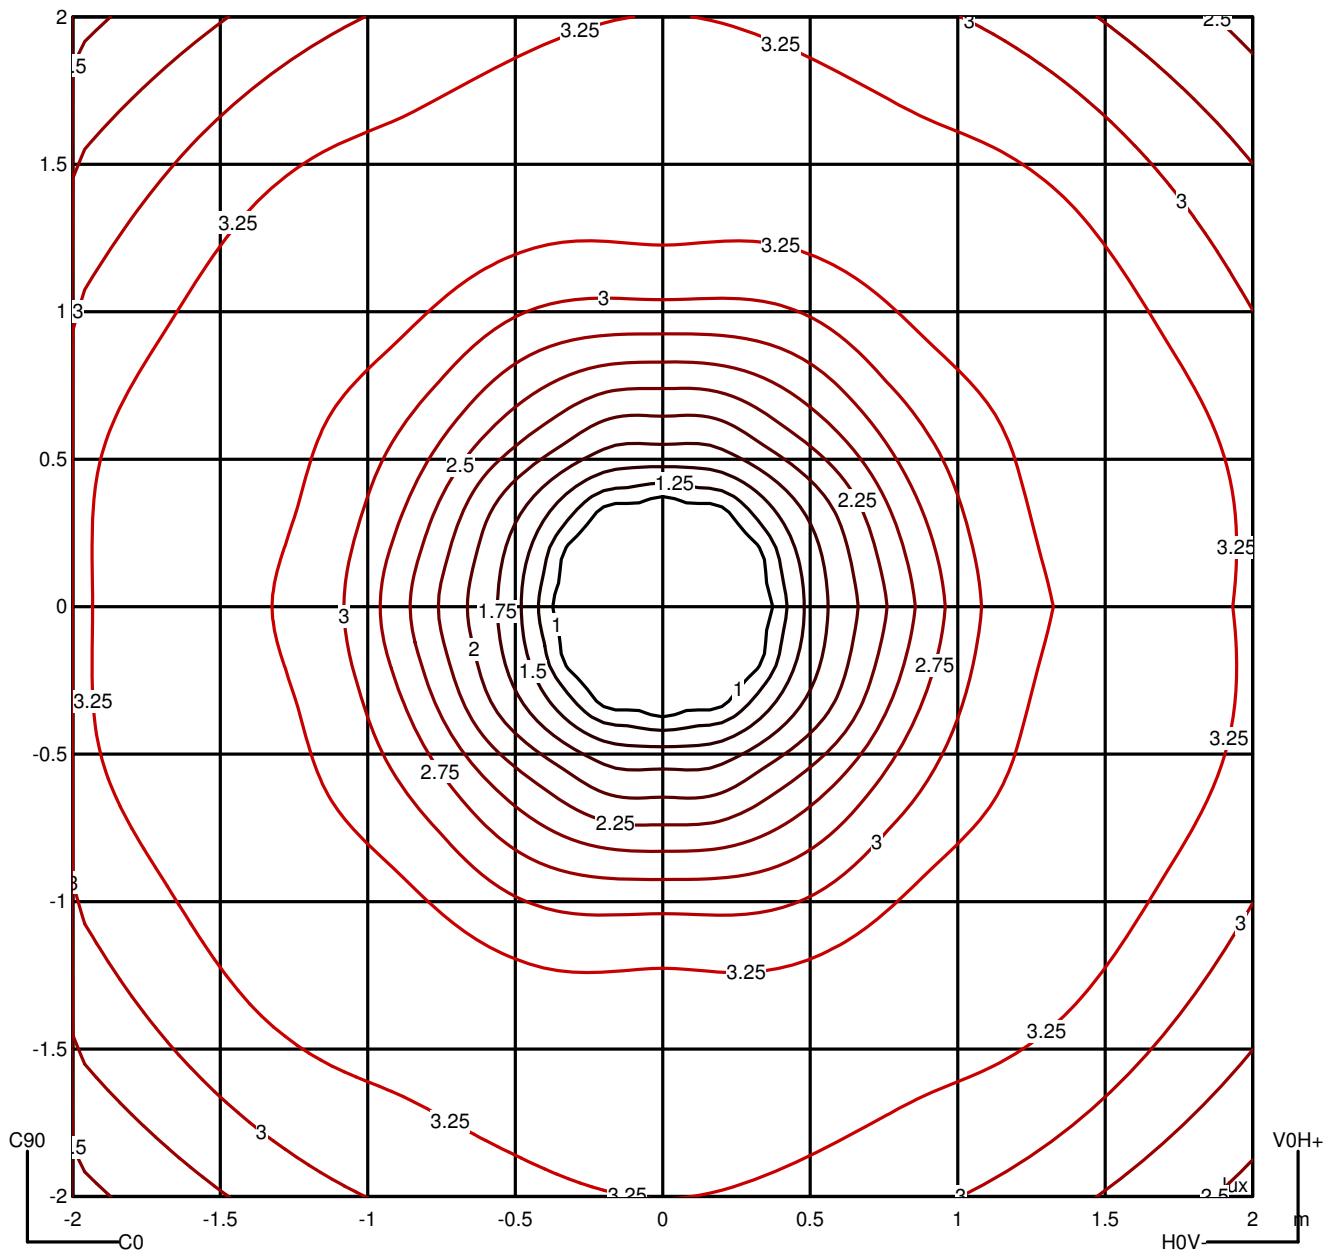

Luminaire

Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL


Measurment

Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

		Average Luminance [cd/m ²]									
		45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°		3867	4087	4281	4518	4703	4912	5079	5274	5457	---
90.0°		3963	4168	4389	4595	4766	4987	5156	5342	5514	---

Flujo montado o vista transversal												
		Iluminancia (lx)										
A	A	2000	1000	750	500		<300				1.15	
B	1		2000	1500	1000	750	500	<300			1.5	
C					2000		1000	500	<300		1.85	
D	2						2000	1000	500	<300	2.2	
E	3							2000	1000	500	<300	2.55

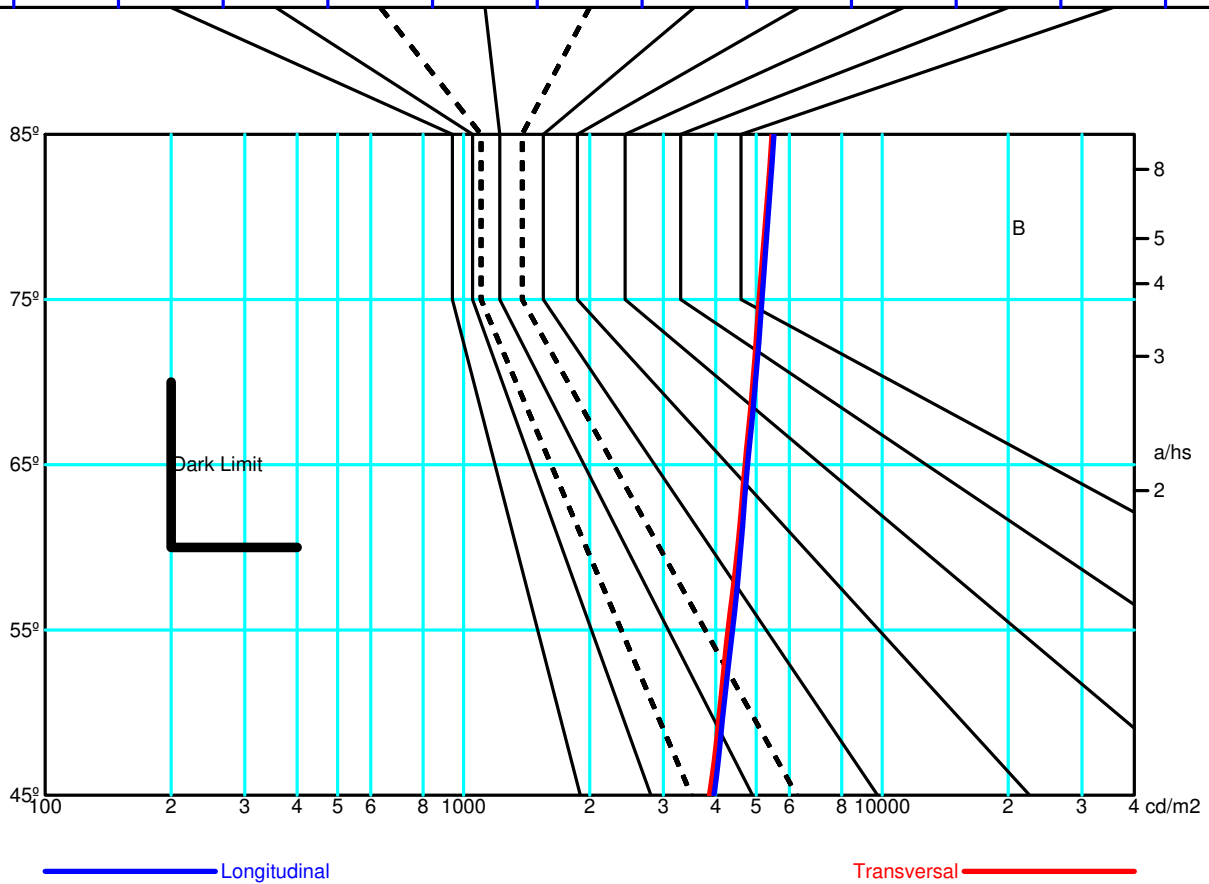

Luminaire


Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL

Measurem.


Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

Diam=80mm



Semiplanos C
 180.0 ——— 0.0
 270.0 ——— 90.0

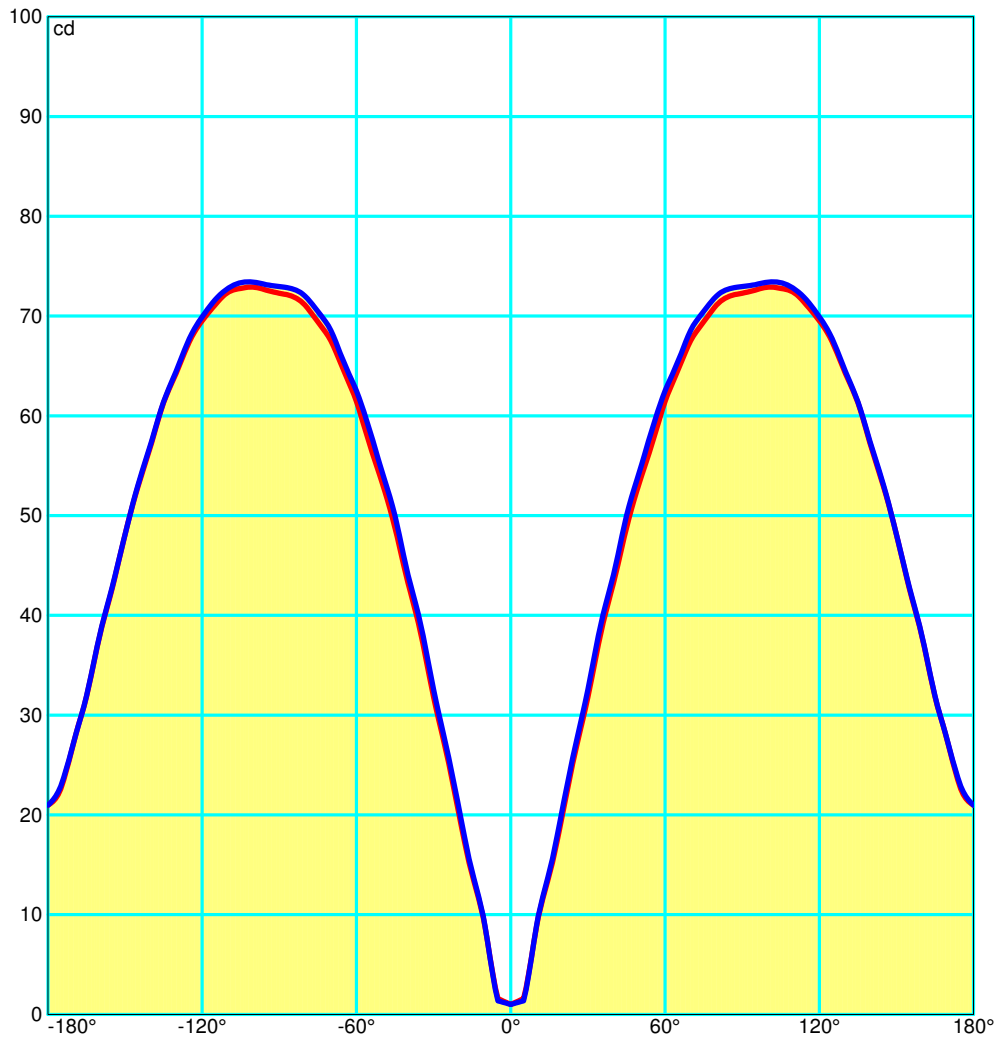



Luminaire

Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL

Measurement

Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	13.8	14.8	14.7	15.7	17.0	13.8	14.8	14.7	15.7	17.0
x=2H y=3H	16.8	17.7	17.7	18.7	20.0	16.8	17.7	17.7	18.7	20.0
x=2H y=4H	18.3	19.1	19.2	20.1	21.4	18.3	19.1	19.2	20.1	21.4
x=2H y=6H	19.7	20.5	20.7	21.5	22.8	19.8	20.5	20.7	21.5	22.8
x=2H y=8H	20.4	21.2	21.4	22.2	23.6	20.5	21.2	21.5	22.2	23.6
x=2H y=12H	21.1	21.8	22.1	22.9	24.2	21.2	21.9	22.2	22.9	24.2
x=4H y=2H	14.9	15.7	15.8	16.7	18.0	14.9	15.7	15.8	16.7	18.0
x=4H y=3H	17.9	18.6	18.9	19.7	21.0	17.9	18.6	18.9	19.7	21.0
x=4H y=4H	19.5	20.2	20.5	21.2	22.5	19.5	20.2	20.5	21.2	22.5
x=4H y=6H	21.1	21.7	22.1	22.7	24.1	21.1	21.7	22.1	22.7	24.1
x=4H y=8H	21.9	22.5	22.9	23.5	24.9	21.9	22.5	22.9	23.5	24.9
x=4H y=12H	22.7	23.2	23.7	24.2	25.6	22.7	23.2	23.7	24.2	25.6
x=8H y=4H	20.2	20.7	21.2	21.7	23.1	20.2	20.7	21.2	21.7	23.1
x=8H y=6H	22.0	22.4	23.0	23.5	24.9	22.0	22.4	23.0	23.5	24.9
x=8H y=8H	22.9	23.3	24.0	24.4	25.8	22.9	23.3	24.0	24.4	25.8
x=8H y=12H	23.9	24.2	24.9	25.3	26.7	23.8	24.2	24.9	25.3	26.7
x=12H y=4H	20.3	20.8	21.3	21.8	23.2	20.3	20.8	21.3	21.8	23.2
x=12H y=6H	22.2	22.6	23.3	23.7	25.1	22.2	22.6	23.3	23.7	25.1
x=12H y=8H	23.2	23.6	24.3	24.7	26.1	23.2	23.6	24.3	24.7	26.1



Luminaire

Code PX-0100-MAR
Name Baliza KORAL 1x23W E27 CFL

Measurment

Code PX-0099-BLA
Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

Flujo Total=1485.00 Flujo Luminaria=746.08


RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.07	0.13	0.17	0.23	0.28	0.36	0.43	0.48	0.55	0.61	0.75	0.85
RC	-	-	-	-	-	-	-	-	-	-	-	-

Flujo Zonal por 1000 Lúmenes

Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	0	3	11	27	53	88	131	181	233	287	339	386	427	459	481	495	501	502

Códigos de Flujo C.I.E.
13 38 68 46 50

C.I.E.	-/-/-/-/-/-/-/-/-/-	LOR	50.24086 %
D DIN 5040	C12	ULOR	26.90239 %
F UTE	--	DLOR	23.33847 %
B NBN	BZ 10	UFF	53.54683 %
RN	53.54683 %	DFF	46.45317 %
BLF	1.0	FFR	115.27057 %

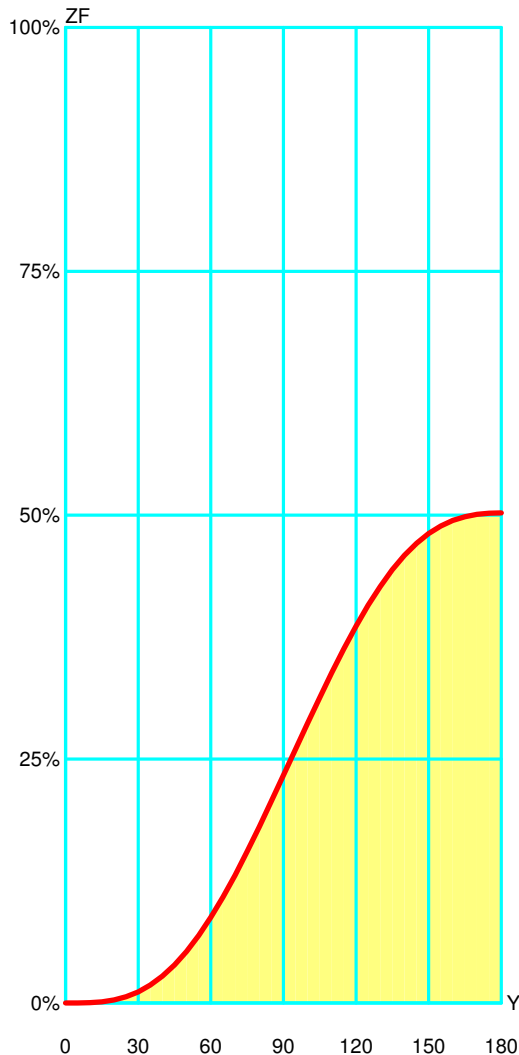

Gamma °	Flujo Zonal			
	Flujo	Suma lm	Flujo [%]	Suma [%]
0°	0.00	0.00	0.00%	0.00 %
5°	0.02	0.02	0.00%	0.00 %
10°	0.25	0.28	0.05%	0.06 %
15°	0.90	1.18	0.18%	0.24 %
20°	1.90	3.08	0.38%	0.61 %
25°	3.28	6.36	0.65%	1.27 %
30°	4.98	11.34	0.99%	2.26 %
35°	6.97	18.31	1.39%	3.65 %
40°	9.17	27.49	1.83%	5.47 %
45°	11.50	38.99	2.29%	7.76 %
50°	13.90	52.89	2.77%	10.53 %
55°	16.28	69.16	3.24%	13.77 %
60°	18.57	87.73	3.70%	17.46 %
65°	20.68	108.41	4.12%	21.58 %
70°	22.57	130.98	4.49%	26.07 %
75°	24.15	155.13	4.81%	30.88 %
80°	25.38	180.51	5.05%	35.93 %
85°	26.22	206.74	5.22%	41.15 %
90°	26.65	233.38	5.30%	46.45 %
95°	26.75	260.14	5.32%	51.78 %
100°	26.65	286.79	5.30%	57.08 %
105°	26.30	313.09	5.23%	62.32 %
110°	25.59	338.68	5.09%	67.41 %
115°	24.52	363.20	4.88%	72.29 %
120°	23.08	386.29	4.59%	76.89 %
125°	21.34	407.62	4.25%	81.13 %
130°	19.32	426.94	3.85%	84.98 %
135°	17.12	444.06	3.41%	88.39 %
140°	14.78	458.84	2.94%	91.33 %
145°	12.37	471.21	2.46%	93.79 %
150°	10.00	481.22	1.99%	95.78 %
155°	7.74	488.96	1.54%	97.32 %
160°	5.67	494.63	1.13%	98.45 %
165°	3.86	498.49	0.77%	99.22 %
170°	2.36	500.85	0.47%	99.69 %
175°	1.20	502.06	0.24%	99.93 %
180°	0.35	502.41	0.07%	100.00 %

Luminaire

Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL

Measurment


Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

Pavement			Road		
Piano	0	0.00%	Piano	0	0.00%
Piano	-5	0.39%	Piano	5	0.39%
Piano	-10	0.80%	Piano	10	0.80%
Piano	-15	1.23%	Piano	15	1.23%
Piano	-20	1.70%	Piano	20	1.70%
Piano	-25	2.19%	Piano	25	2.19%
Piano	-30	2.73%	Piano	30	2.73%
Piano	-35	3.31%	Piano	35	3.31%
Piano	-40	3.92%	Piano	40	3.92%
Piano	-45	4.58%	Piano	45	4.58%
Piano	-50	5.27%	Piano	50	5.27%
Piano	-55	5.99%	Piano	55	5.99%
Piano	-60	6.74%	Piano	60	6.74%
Piano	-65	7.52%	Piano	65	7.52%
Piano	-70	8.32%	Piano	70	8.32%
Piano	-75	9.14%	Piano	75	9.14%
Piano	-80	9.98%	Piano	80	9.98%
Piano	-85	10.82%	Piano	85	10.82%
Piano	-90	11.67%	Piano	90	11.67%

Ángulo de Inclinación = 0.0

DLOR = 23.34%


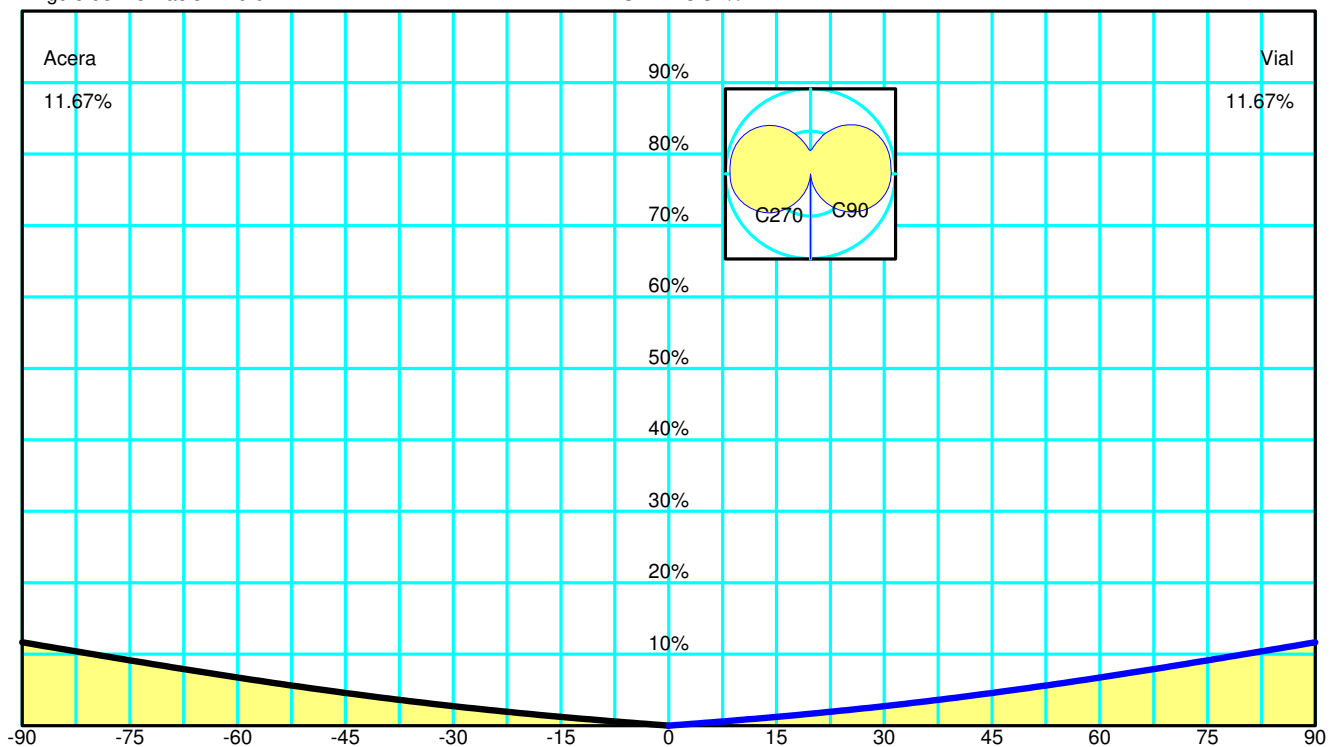


Spread	0.0° Estrecho	DLOR	23.33847 %
Throw	96.9° Largo	ULOR	26.90239 %
Cutoff CIE	No Cutoff - Max: C=90.0° Gamma=100.0°	Rendimiento	50.24086 %
Cutoff Iesna	Semi Cutoff	RN	53.54683 %
DIN5044	KB2	Clase de Intensidad Luminosa	G1
	IESNA Type V Very Short	Índice de Deslumbramiento	D5
	Quadrilateral Symmetry		

Luminaire
 Code PX-0100-MAR
 Name Baliza KORAL 1x23W E27 CFL
Measuram.
 Code PX-0099-BLA
 Name Baliza KORAL 1x23W E27 CFL

Luminaire Flux	746.08 lm	Luminaire Power	23.00 W	Efficacy	32.44 lm/W	Efficiency	50.24%
Lamps Flux	1485.00 lm	Maximum value	73.40 cd	Position	C=90.00 G=100.00	CG	Asymmetrical

US ROAD STANDARDS

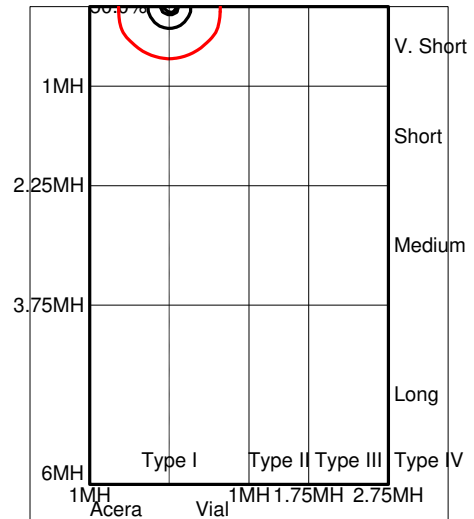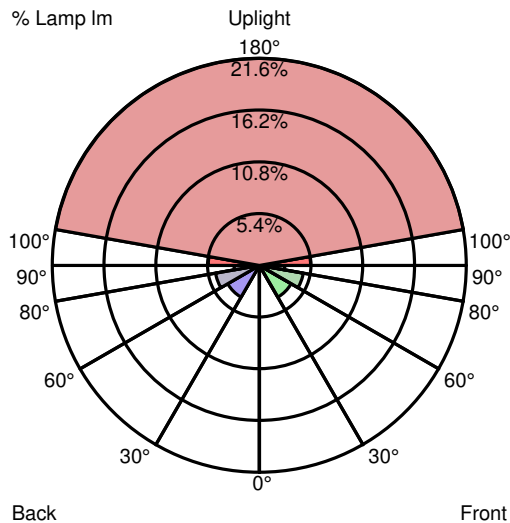

Luminaire Classification System (LCS)			
LCS Zone		Lumens	%Lamp %Lum
FL	0° -- 30°	8.5 lm	0.6 % 1.1 %
FM	30° -- 60°	56.7 lm	3.8 % 7.6 %
FH	60° -- 80°	68.9 lm	4.6 % 9.2 %
FVH	80° -- 90°	39.2 lm	2.6 % 5.3 %
BL	0° -- 30°	8.5 lm	0.6 % 1.1 %
BM	30° -- 60°	56.7 lm	3.8 % 7.6 %
BH	60° -- 80°	68.9 lm	4.6 % 9.2 %
BVH	80° -- 90°	39.2 lm	2.6 % 5.3 %
UL	90° -- 100°	79.2 lm	5.3 % 10.6 %
UH	100° -- 180°	320.3 lm	21.6 % 42.9 %
TOTALS		746.1 lm	50.2 % 100.0 %
BUG B0 U3 G1 Type V Very Short Quadrilateral Symmetry			



Koral

PX-0099 PX-0100

FOR LIGHT

