
Elit

TC-0306-BLA

Spotlight Elit LED 7.3W 3000K ON-OFF White IP20 470.00





TECHNICAL FEATURES

IP20 355º 0º a 90º

Luminaire total power : 7.3W

Real lumens : 421

Nominal lumens : 470

Real lm/W : 58

Lens / reflector angle : FLOOD 48º

UGR : <=19

Structure material : Aluminium

Structure finish : White

Diffuser material : Glass

Diffuser finish : Transparent

Voltage / frequency : 100-240V ~ 50/60Hz

Dimming protocol : ON-OFF

Power Factor : 0.39

Useful life : 36.000h L70B30

Warranty : 3 Years

Easily recyclable luminaire

LUMINOTECHNIC FEATURES

CRI: 80


MacAdam steps: 3


Photobiological risk: RG1

UGR

UGR crosswise: 16.3

UGR lengthwise: 16.3





Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	5.6W	3000K

LOGISTICS

Net weight (kg): 0.22

Packaged weight (kg): 0.26

Packaging: 120mm x 70mm x 120mm

20 Un

LIGHT APPLICATION

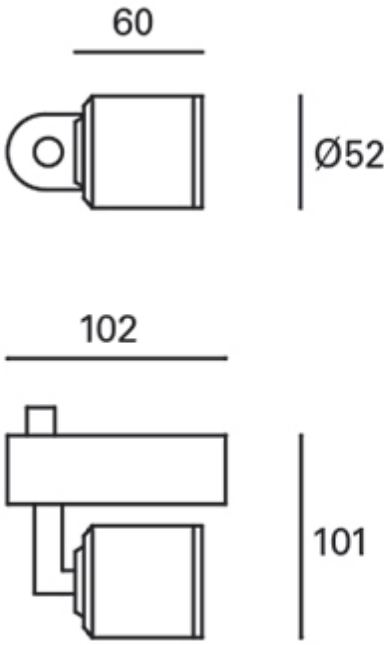


Image may not match reference. LEDS C4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature are subject to a tolerance of ±10%.



TC-8000-BLA

Structure material: Steel
Dimensions: 34 x 2000 x 17
Net weight (kg): 0.98

Image may not match reference. LEDS C4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature are subject to a tolerance of ±10%.

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K


Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Round Luminaire	Diam. 52 mm	Height	145 mm
Round Luminous Area	Diam. 48 mm	Height	0 mm
Horizontal Luminous Area	0.001810 m2	Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.000438 m2
Coordinate system	CG	Symmetry Type	Double Symmetrical
Date	15-03-2017	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	420.97 lm
Operator	Asselum T3	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps


Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	CL116A17F084G	CL116A17F084G	420.97	6.93	1

C.I.E.	98	99	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1



C Halfplanes
180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

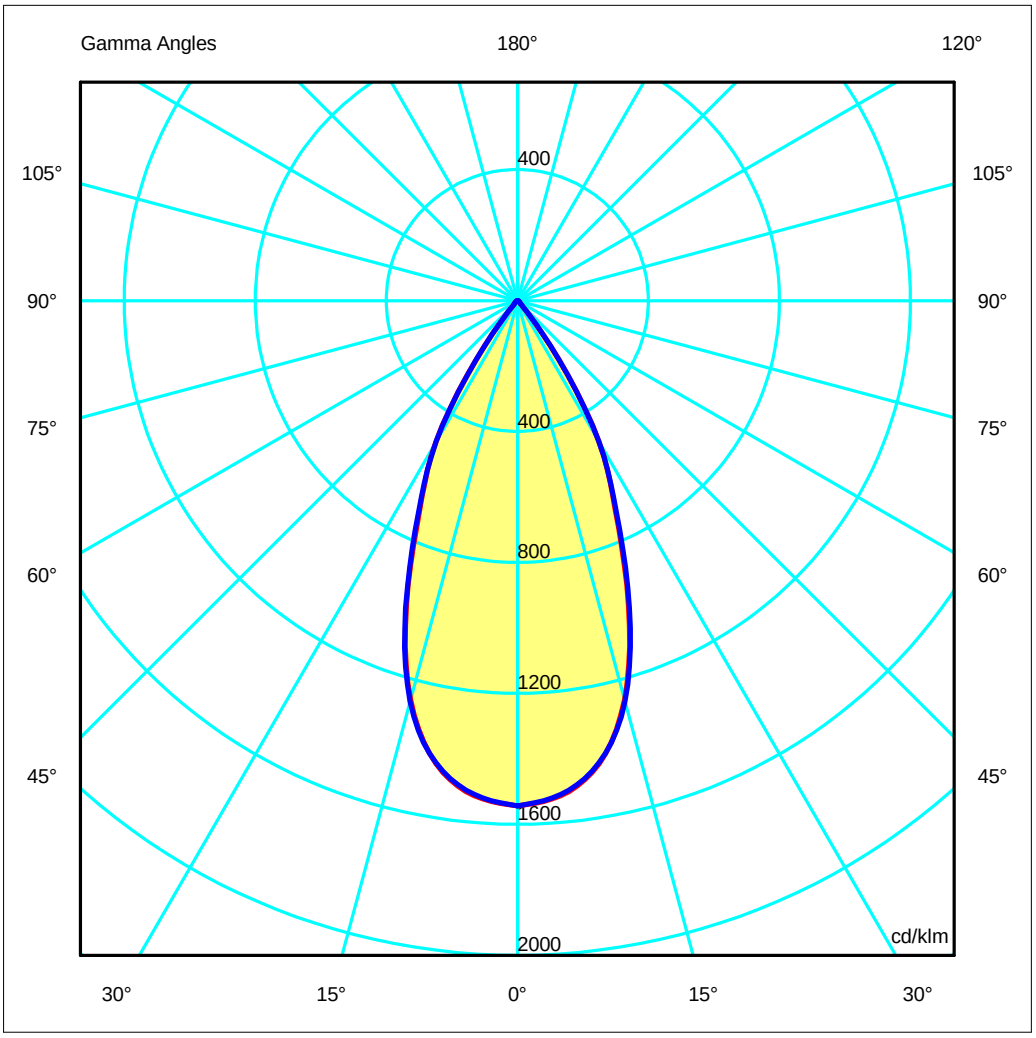

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


Luminous Intensity Table cd/klm **Table 1/1**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	1543.02	1543.02	1543.02	1543.02	1543.02	1543.02	1543.02
G 5.0	1517.77	1518.33	1518.10	1514.82	1513.99	1512.34	1514.12
G 10.0	1435.62	1437.29	1436.93	1435.65	1436.09	1435.67	1433.53
G 15.0	1261.33	1266.95	1263.92	1266.67	1259.45	1261.47	1267.36
G 20.0	991.31	993.96	988.70	996.96	1000.27	1003.52	998.08
G 25.0	706.96	711.94	708.76	709.44	707.72	715.27	716.88
G 30.0	497.87	494.73	491.40	496.60	497.18	499.32	495.25
G 35.0	221.55	230.97	223.17	231.68	222.72	228.30	219.28
G 40.0	41.60	41.80	41.76	42.90	42.03	43.42	43.04
G 45.0	14.21	14.48	14.28	14.78	14.67	15.08	14.61
G 50.0	8.61	8.65	8.63	8.68	8.67	8.69	8.70
G 55.0	6.36	6.37	6.38	6.44	6.43	6.46	6.43
G 60.0	4.63	4.66	4.68	4.70	4.74	4.77	4.78
G 65.0	3.03	3.06	3.05	3.07	3.08	3.08	3.10
G 70.0	2.38	2.38	2.39	2.42	2.43	2.45	2.45
G 75.0	2.09	2.09	2.10	2.12	2.15	2.19	2.21
G 80.0	1.89	1.89	1.91	1.94	1.98	2.06	2.08
G 85.0	1.60	1.59	1.59	1.62	1.66	1.73	1.77
G 90.0	1.38	1.36	1.38	1.41	1.48	1.56	1.62

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K


Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Diam=52mm



C Halfplanes



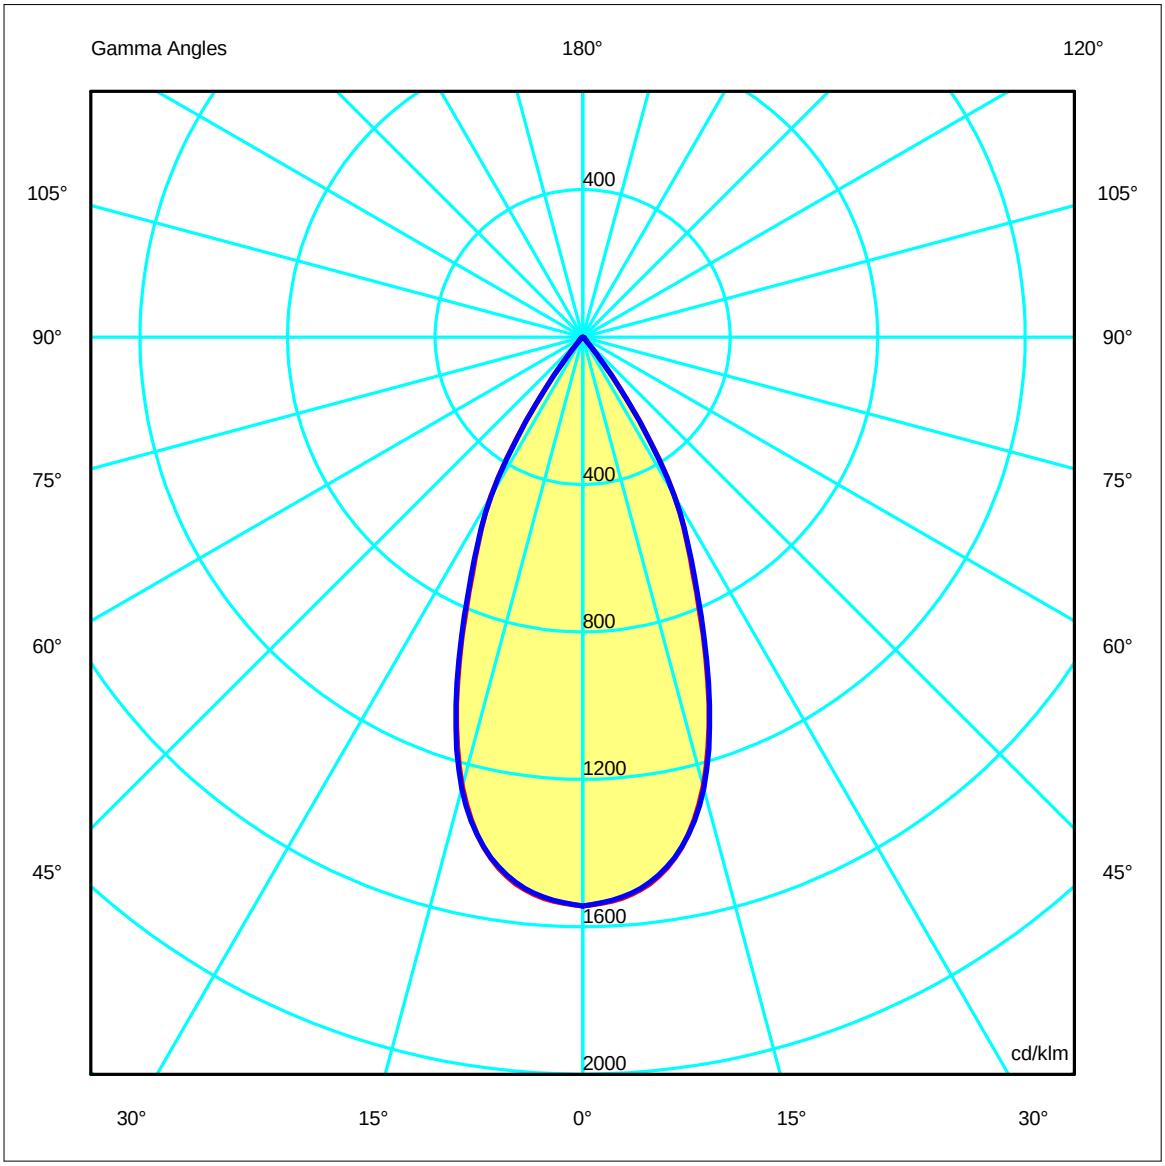

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K


Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.88	1.32	1.76	2.20	OC	0.44	0.89	1.33	1.77	2.22
OB	0.44	0.88	1.32	1.76	2.20	OD	0.44	0.89	1.33	1.77	2.22

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	649.56	638.94	530.98	297.61	93.27	5.98	2.68	1.28	0.88	0.67
OB	649.56	638.94	530.98	297.61	93.27	5.98	2.68	1.28	0.88	0.67
OC	649.56	637.40	533.52	301.79	92.31	6.15	2.71	1.31	0.93	0.75
OD	649.56	637.40	533.52	301.79	92.31	6.15	2.71	1.31	0.93	0.75

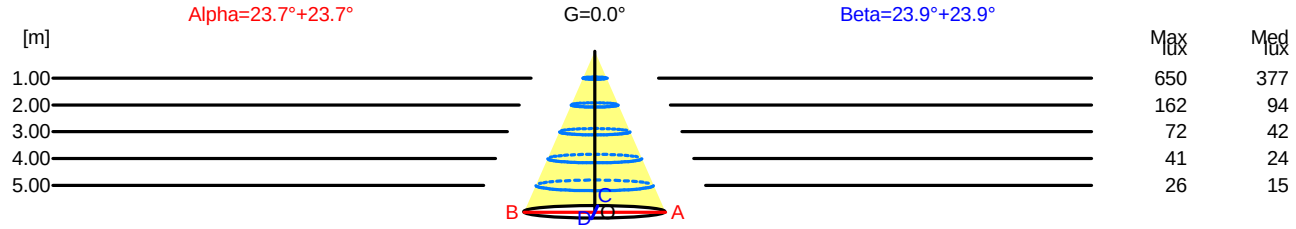

H[m]	D[m]	Max lux	Med lux	Alpha=23.7°+23.7° G=0.0
1.00	0.88	650	377	
2.00	1.76	162	94	
3.00	2.64	72	42	
4.00	3.52	41	24	
5.00	4.40	26	15	

H[m]	D[m]	Max lux	Med lux	Beta=23.9°+23.9° G=0.0
1.00	0.89	650	377	
2.00	1.77	162	94	
3.00	2.66	72	42	
4.00	3.55	41	24	
5.00	4.44	26	15	

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.4	17.0	16.6	17.2	17.4	16.4	17.0	16.6	17.2	17.4
x=2H y=3H	16.3	16.9	16.6	17.1	17.3	16.3	16.9	16.5	17.1	17.3
x=2H y=4H	16.2	16.8	16.5	17.0	17.3	16.2	16.8	16.5	17.0	17.3
x=2H y=6H	16.2	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
x=2H y=8H	16.2	16.7	16.6	17.0	17.3	16.2	16.7	16.6	17.0	17.3
x=2H y=12H	16.2	16.7	16.6	17.0	17.4	16.3	16.7	16.6	17.0	17.4
x=4H y=2H	16.2	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
x=4H y=3H	16.1	16.6	16.4	16.9	17.2	16.1	16.6	16.4	16.9	17.2
x=4H y=4H	16.1	16.5	16.4	16.8	17.1	16.1	16.5	16.4	16.8	17.1
x=4H y=6H	16.1	16.4	16.5	16.8	17.2	16.1	16.4	16.5	16.8	17.2
x=4H y=8H	16.1	16.4	16.5	16.8	17.2	16.2	16.5	16.6	16.8	17.2
x=4H y=12H	16.2	16.4	16.6	16.8	17.3	16.2	16.5	16.7	16.9	17.3
x=8H y=4H	16.0	16.3	16.4	16.7	17.1	16.0	16.3	16.4	16.7	17.1
x=8H y=6H	16.1	16.3	16.5	16.7	17.2	16.1	16.3	16.5	16.7	17.2
x=8H y=8H	16.1	16.3	16.6	16.7	17.3	16.2	16.3	16.6	16.8	17.3
x=8H y=12H	16.2	16.4	16.7	16.9	17.4	16.3	16.5	16.8	16.9	17.4
x=12H y=4H	16.0	16.2	16.4	16.6	17.0	16.0	16.2	16.4	16.6	17.0
x=12H y=6H	16.0	16.2	16.5	16.7	17.1	16.1	16.2	16.5	16.7	17.1
x=12H y=8H	16.1	16.3	16.6	16.7	17.3	16.2	16.3	16.7	16.8	17.3

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K


Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Diam=52mm



C Halfplanes


180.0 0.0
270.0 90.0

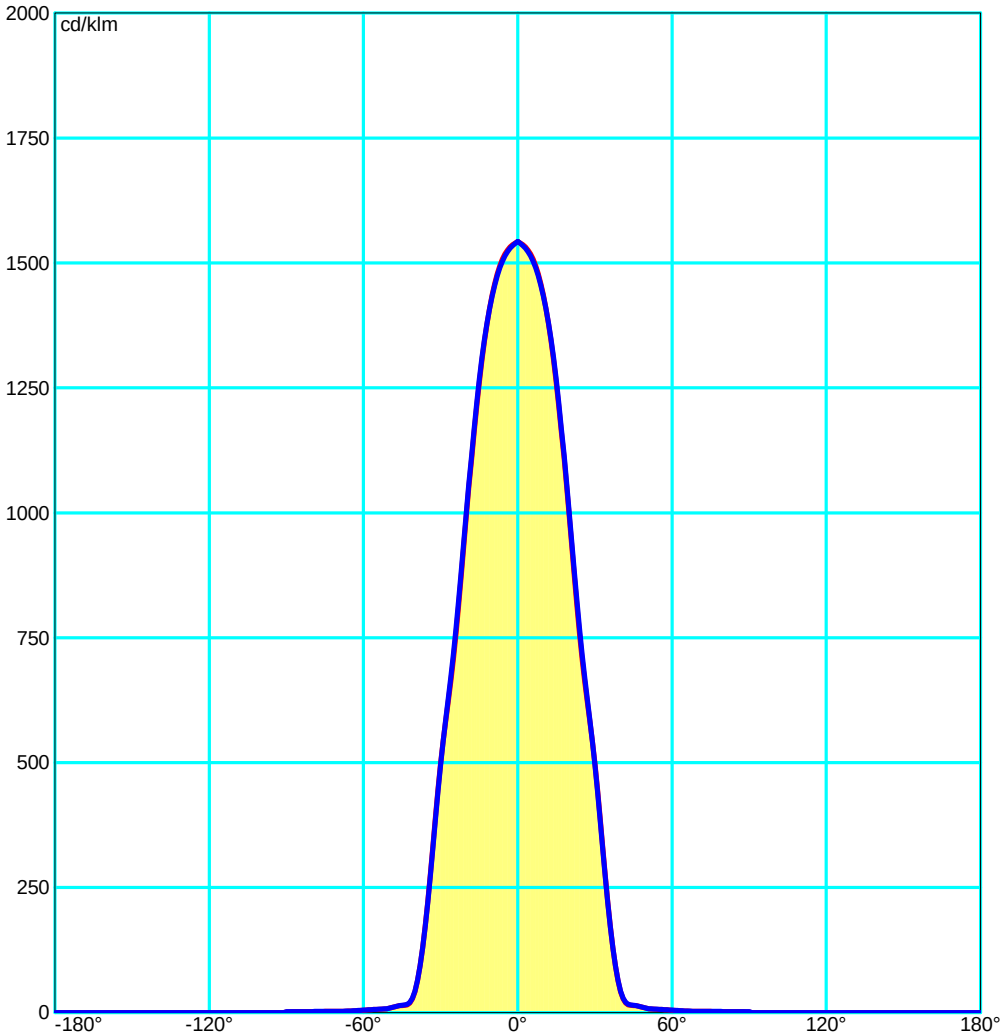

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance

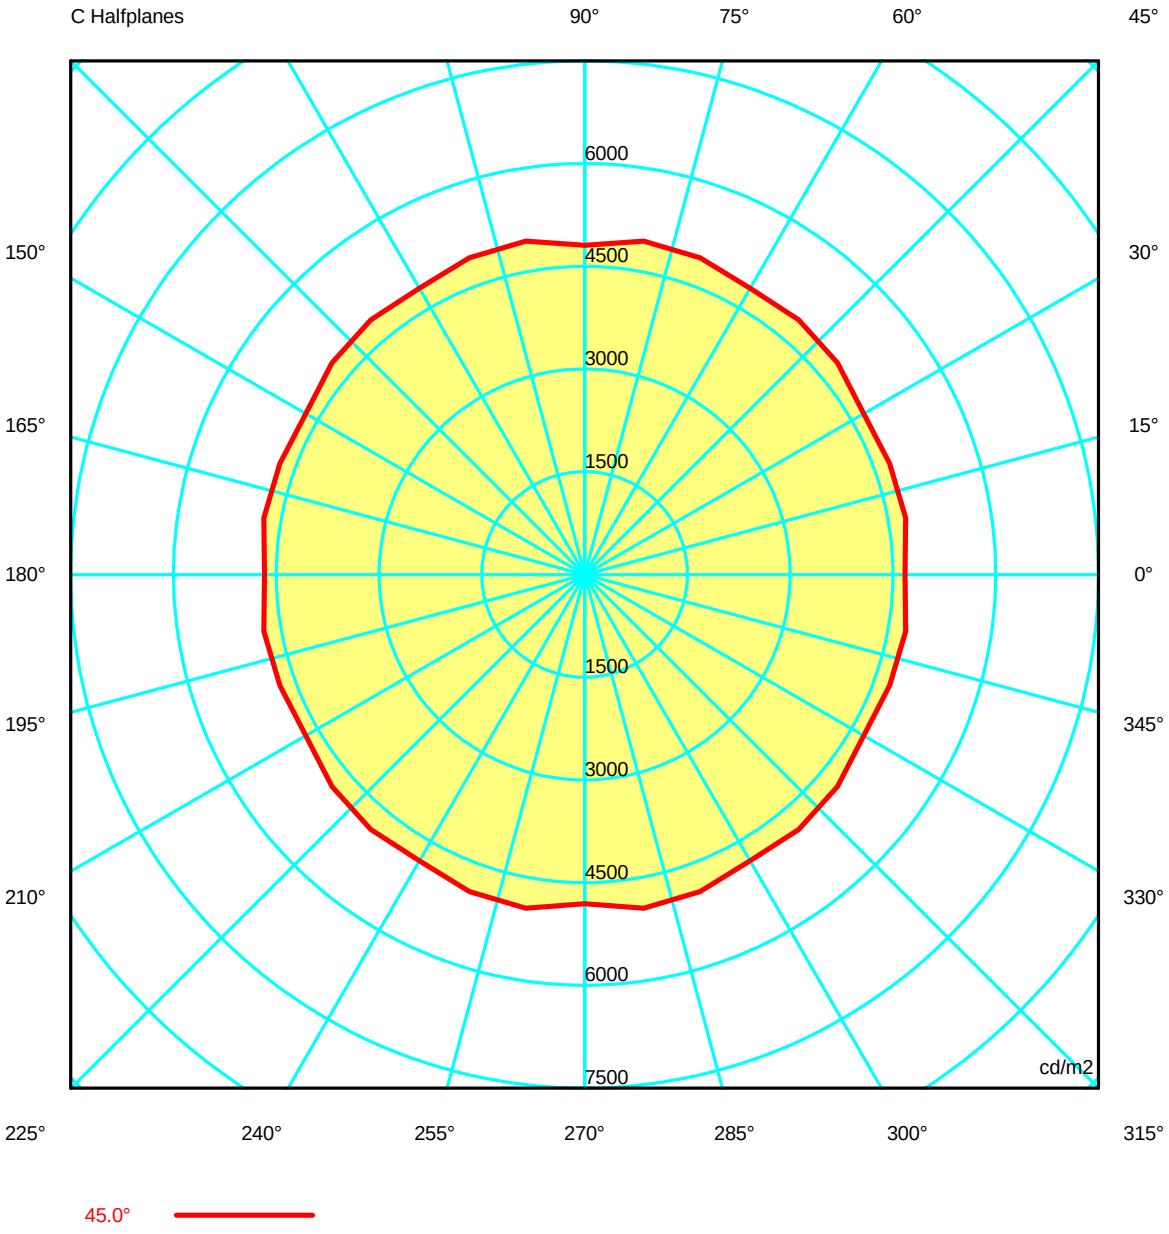

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70
G 5.0	354438.86	354519.84	354616.91	354514.19	353985.03	353643.76	353555.14	353258.82	353219.05	353586.92	353219.05	353258.82	353555.14
G 10.0	339129.73	339431.47	339552.75	339439.37	339207.73	339142.63	339242.55	339226.19	339005.44	338636.03	339005.44	339226.19	339242.55
G 15.0	303784.09	304949.37	304927.61	304406.97	304986.54	304621.43	303331.05	303407.48	304277.90	305234.78	304277.90	303407.48	303331.05
G 20.0	245416.05	246147.07	245574.18	244769.82	246029.53	247246.69	247635.01	248304.12	248218.54	247092.14	248218.54	248304.12	247635.01
G 25.0	181466.57	182562.09	182556.50	181928.98	182074.20	181956.60	181660.95	182917.04	183737.97	184014.18	183737.97	182917.04	181660.95
G 30.0	133742.14	133256.07	132447.44	132004.12	132927.14	133451.22	133554.52	134014.73	133955.96	133037.52	133955.96	134014.73	133554.52
G 35.0	62920.50	65356.22	64866.61	63379.32	65192.06	65204.45	63252.97	64288.59	64550.87	62275.68	64550.87	64288.59	63252.97
G 40.0	12632.73	12696.44	12689.91	12681.51	12960.62	12952.86	12763.38	13035.43	13223.94	13070.80	13223.94	13035.43	12763.38
G 45.0	4674.40	4756.36	4736.48	4699.64	4814.37	4858.99	4827.86	4925.62	4945.46	4808.11	4945.46	4925.62	4827.86
G 50.0	3117.69	3127.65	3126.46	3123.23	3136.29	3141.77	3136.91	3142.78	3147.50	3148.85	3147.50	3142.78	3136.91
G 55.0	2577.72	2582.61	2584.64	2586.90	2604.80	2611.83	2607.60	2615.16	2617.49	2607.15	2617.49	2615.16	2607.60
G 60.0	2155.63	2163.99	2172.42	2179.68	2184.79	2192.68	2204.58	2216.39	2223.60	2226.18	2223.60	2216.39	2204.58
G 65.0	1669.81	1684.55	1684.02	1676.96	1685.85	1691.83	1692.74	1693.72	1697.69	1707.76	1697.69	1693.72	1692.74
G 70.0	1617.90	1618.65	1621.20	1628.67	1638.67	1646.60	1652.74	1660.87	1666.60	1668.54	1666.60	1660.87	1652.74
G 75.0	1881.33	1878.25	1877.98	1883.99	1898.44	1916.00	1935.47	1958.66	1975.90	1984.95	1975.90	1958.66	1935.47
G 80.0	2534.09	2532.71	2536.89	2554.21	2588.14	2619.13	2656.30	2723.98	2772.10	2783.96	2772.10	2723.98	2656.30
G 85.0	4263.24	4247.24	4240.28	4251.04	4285.68	4342.28	4432.28	4563.74	4672.14	4737.34	4672.14	4563.74	4432.28
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70
G 5.0	353643.76	353985.03	354514.19	354616.91	354519.84	354438.86	354519.84	354616.91	354514.19	353985.03	353643.76	353555.14	353258.82
G 10.0	339142.63	339207.73	339439.37	339552.75	339431.47	339129.73	339431.47	339552.75	339439.37	339207.73	339142.63	339242.55	339226.19
G 15.0	304621.43	304986.54	304406.97	304927.61	304949.37	303784.09	304949.37	304927.61	304406.97	304986.54	304621.43	303331.05	303407.48
G 20.0	247246.69	246029.53	244769.82	245574.18	246147.07	245416.05	246147.07	245574.18	244769.82	246029.53	247246.69	247635.01	248304.12
G 25.0	181956.60	182074.20	181928.98	182556.50	182562.09	181466.57	182562.09	182556.50	181928.98	182074.20	181956.60	181660.95	182917.04
G 30.0	133451.22	132927.14	132004.12	132447.44	133256.07	133742.14	133256.07	132447.44	132004.12	132927.14	133451.22	133554.52	134014.73
G 35.0	65204.45	65192.06	63379.32	64866.61	65356.22	62920.50	65356.22	64866.61	63379.32	65192.06	65204.45	63252.97	64288.59
G 40.0	12952.86	12960.62	12681.51	12689.91	12696.44	12632.73	12696.44	12689.91	12681.51	12960.62	12952.86	12763.38	13035.43
G 45.0	4858.99	4814.37	4699.64	4736.48	4756.36	4674.40	4756.36	4736.48	4699.64	4814.37	4858.99	4827.86	4925.62
G 50.0	3141.77	3136.29	3123.23	3126.46	3127.65	3117.69	3127.65	3126.46	3123.23	3136.29	3141.77	3136.91	3142.78
G 55.0	2611.83	2604.80	2586.90	2584.64	2582.61	2577.72	2582.61	2584.64	2586.90	2604.80	2611.83	2607.60	2615.16
G 60.0	2192.68	2184.79	2179.68	2172.42	2163.99	2155.63	2163.99	2172.42	2179.68	2184.79	2192.68	2204.58	2216.39
G 65.0	1691.83	1685.85	1676.96	1684.02	1684.55	1669.81	1684.55	1684.02	1676.96	1685.85	1691.83	1692.74	1693.72
G 70.0	1646.60	1638.67	1628.67	1621.20	1618.65	1617.90	1618.65	1621.20	1628.67	1638.67	1646.60	1652.74	1660.87
G 75.0	1916.00	1898.44	1883.99	1877.98	1878.25	1881.33	1878.25	1877.98	1883.99	1898.44	1916.00	1935.47	1958.66
G 80.0	2619.13	2588.14	2554.21	2536.89	2532.71	2534.09	2532.71	2536.89	2554.21	2588.14	2619.13	2656.30	2723.98
G 85.0	4342.28	4285.68	4251.04	4240.28	4247.24	4263.24	4247.24	4240.28	4251.04	4285.68	4342.28	4432.28	4563.74
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency 100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG Double Symmetrical

Luminance cd/m2 **Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70
G 5.0	353219.05	353586.92	353219.05	353258.82	353555.14	353643.76	353985.03	354514.19	354616.91	354519.84
G 10.0	339005.44	338636.03	339005.44	339226.19	339242.55	339142.63	339207.73	339439.37	339552.75	339431.47
G 15.0	304277.90	305234.78	304277.90	303407.48	303331.05	304621.43	304986.54	304406.97	304927.61	304949.37
G 20.0	248218.54	247092.14	248218.54	248304.12	247635.01	247246.69	246029.53	244769.82	245574.18	246147.07
G 25.0	183737.97	184014.18	183737.97	182917.04	181660.95	181956.60	182074.20	181928.98	182556.50	182562.09
G 30.0	133955.96	133037.52	133955.96	134014.73	133554.52	133451.22	132927.14	132004.12	132447.44	133256.07
G 35.0	64550.87	62275.68	64550.87	64288.59	63252.97	65204.45	65192.06	63379.32	64866.61	65356.22
G 40.0	13223.94	13070.80	13223.94	13035.43	12763.38	12952.86	12960.62	12681.51	12689.91	12696.44
G 45.0	4945.46	4808.11	4945.46	4925.62	4827.86	4858.99	4814.37	4699.64	4736.48	4756.36
G 50.0	3147.50	3148.85	3147.50	3142.78	3136.91	3141.77	3136.29	3123.23	3126.46	3127.65
G 55.0	2617.49	2607.15	2617.49	2615.16	2607.60	2611.83	2604.80	2586.90	2584.64	2582.61
G 60.0	2223.60	2226.18	2223.60	2216.39	2204.58	2192.68	2184.79	2179.68	2172.42	2163.99
G 65.0	1697.69	1707.76	1697.69	1693.72	1692.74	1691.83	1685.85	1676.96	1684.02	1684.55
G 70.0	1666.60	1668.54	1666.60	1660.87	1652.74	1646.60	1638.67	1628.67	1621.20	1618.65
G 75.0	1975.90	1984.95	1975.90	1958.66	1935.47	1916.00	1898.44	1883.99	1877.98	1878.25
G 80.0	2772.10	2783.96	2772.10	2723.98	2656.30	2619.13	2588.14	2554.21	2536.89	2532.71
G 85.0	4672.14	4737.34	4672.14	4563.74	4432.28	4342.28	4285.68	4251.04	4240.28	4247.24
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 10.3 Tight Tilting Angle:0°

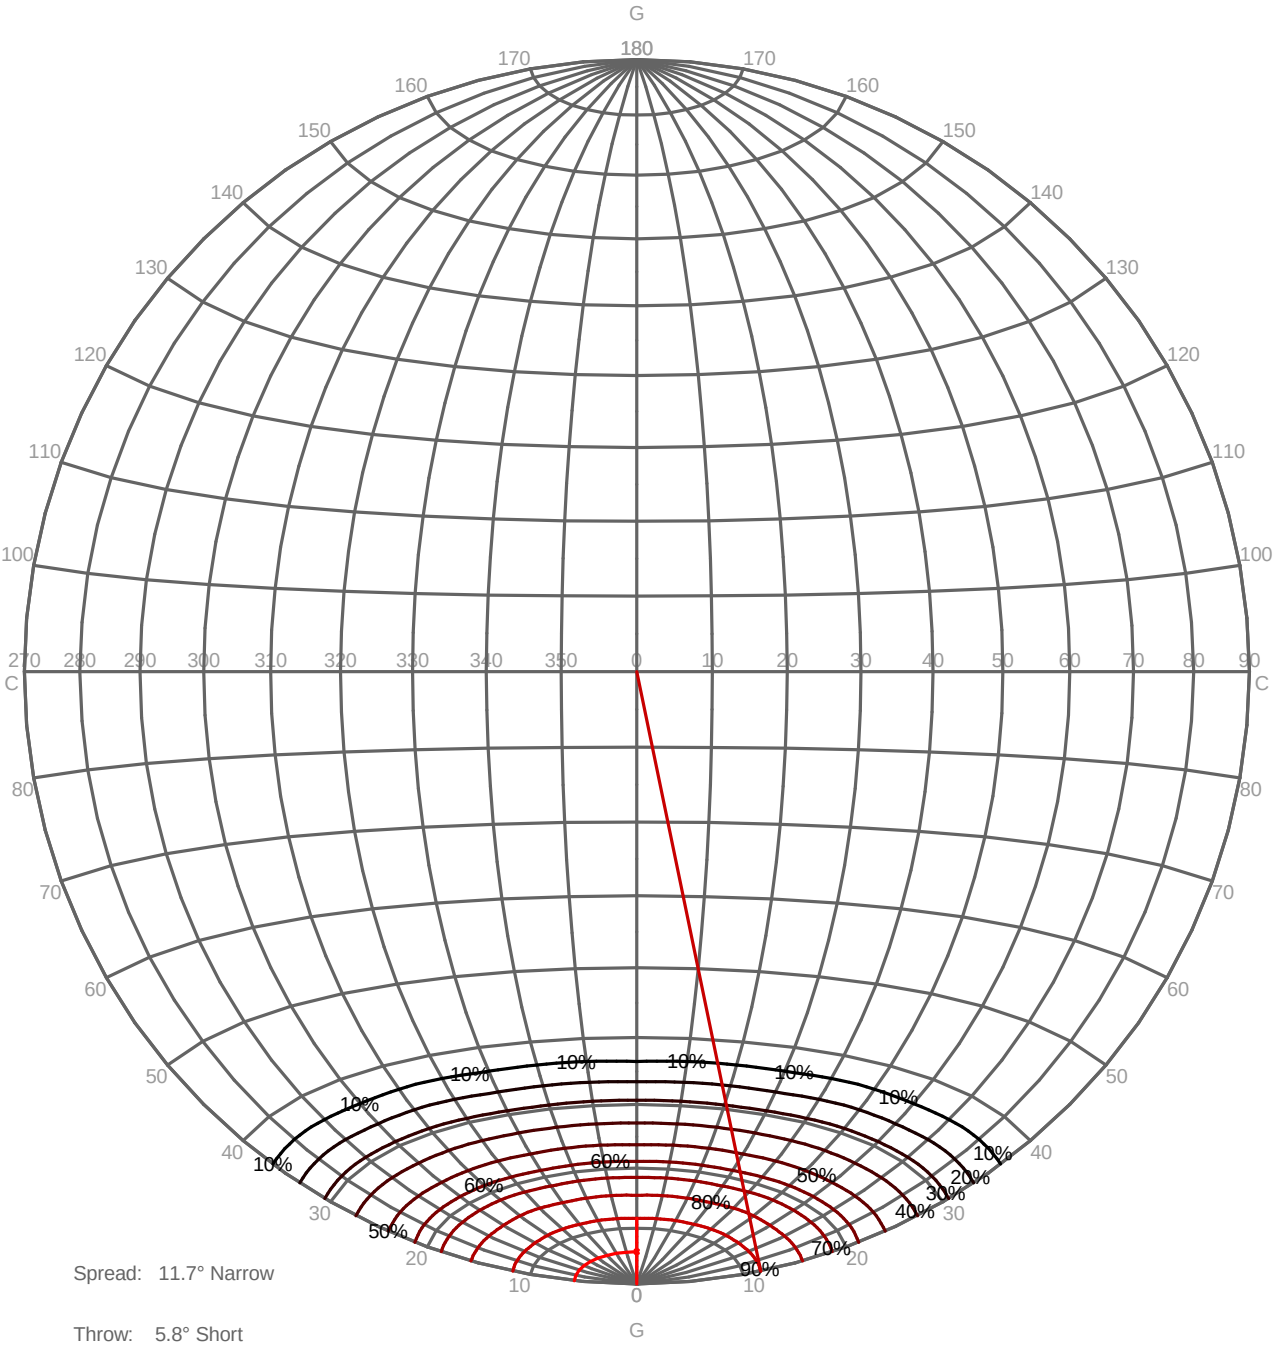

Spread: 11.7° Narrow


Throw: 5.8° Short

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

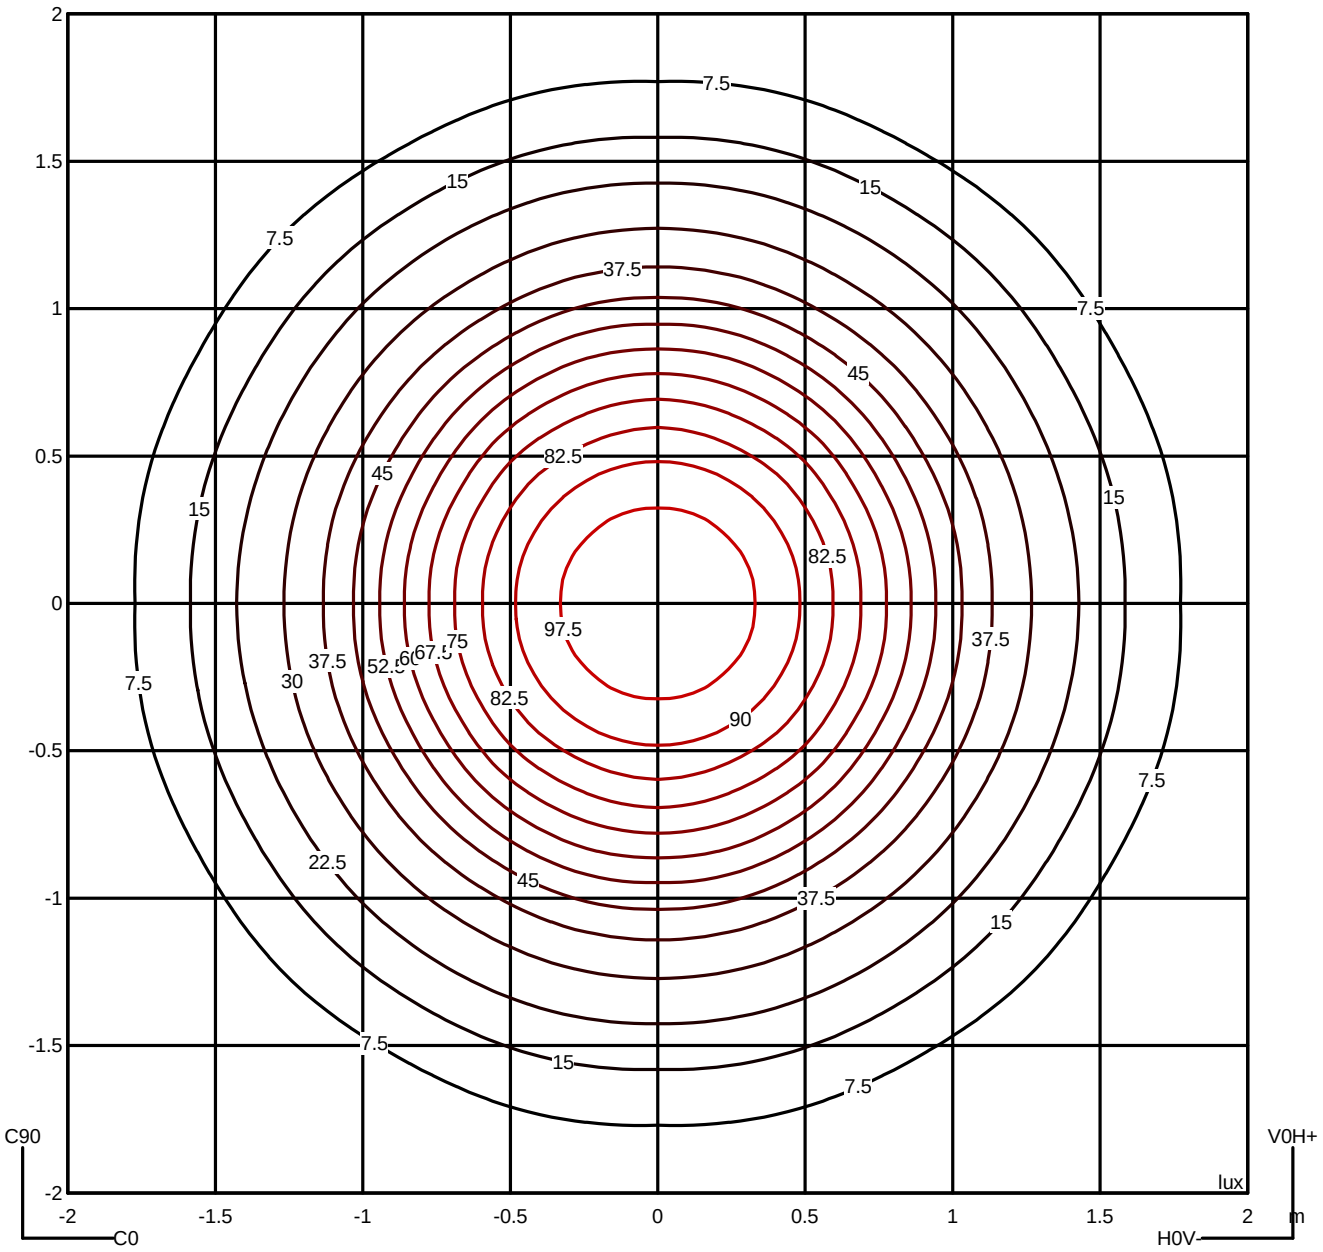

Luminaire
Code TC-0306-BLA
Name Proyector led 7W 3000K
Measurem.
Code CL116A17F084G
Name Proyector led 7W 3000K


Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


Average Luminance [cd/m²]


	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	4674	3118	2578	2156	1670	1618	1881	2534	4263	---
90.0°	4808	3149	2607	2226	1708	1669	1985	2784	4737	---

Flush mounted or longitudinal view

		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

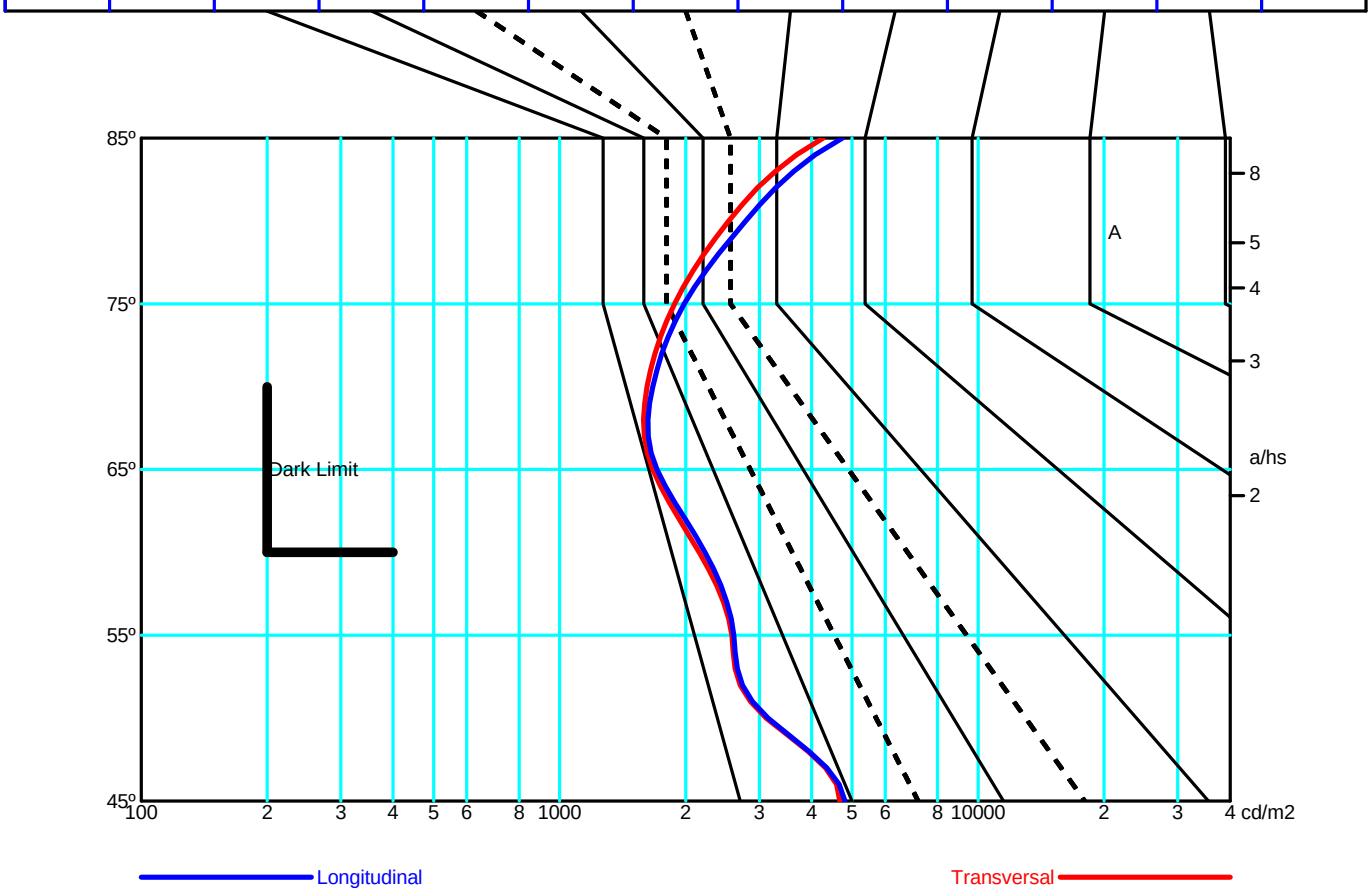


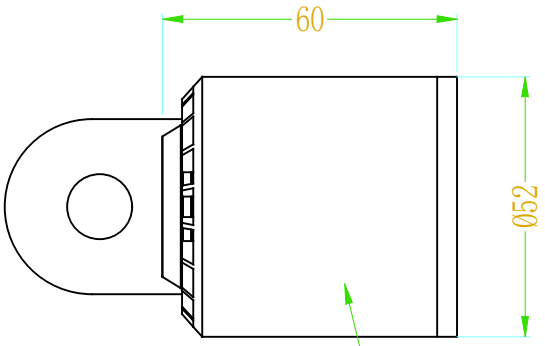


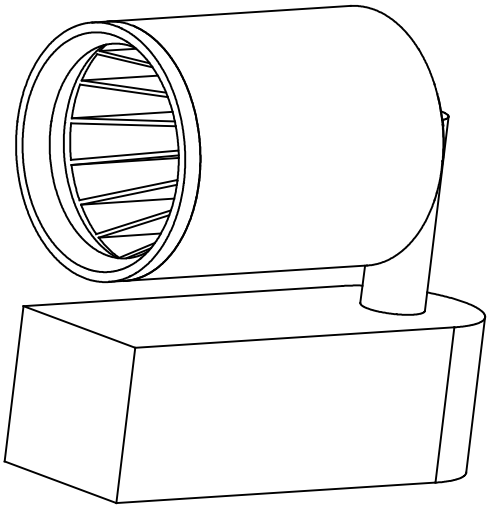

ALUMINUM / WHITE

ALUMINUM / WHITE

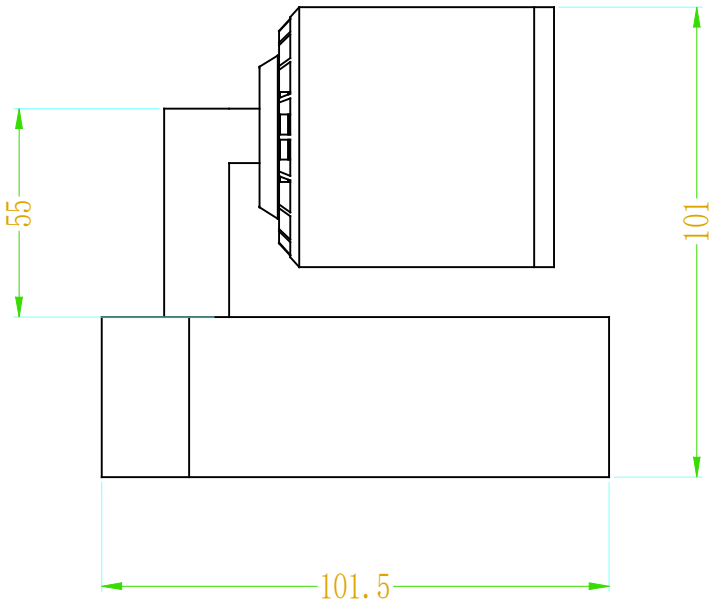

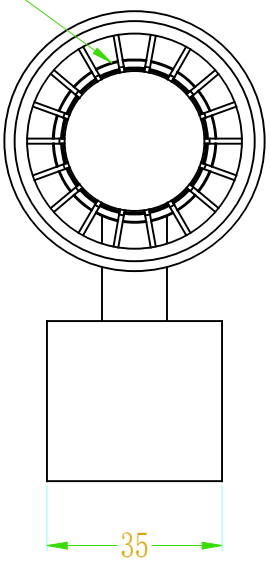

Elit

TC-0306

