

TC-0306-BLA

Spotlight Elit LED 7.3W 3000K ON-OFF White IP20 470.00



TECHNICAL FEATURES



Luminaire total power : 7.3W

Real lumens : 421

Nominal lumens : 470

Real lm/W : 58

Lens / reflector angle : FLOOD 48°

UGR : <=19

Structure material : Aluminium

Structure finish : White

Diffuser material : Glass

Diffuser finish : Transparent

Voltage / frequency : 100-240V ~ 50/60Hz


Dimming protocol : ON-OFF

Power Factor : 0.39

Useful life : 36.000h L70B30

Warranty : 3 Years

Easily recyclable luminaire



LUMINOTECHNIC FEATURES

CRI: 80



MacAdam steps: 3

Photobiological risk: RG1

UGR

UGR crosswise: 16.3

UGR lengthwise: 16.3



Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	5.6W	3000K



LOGISTICS

Net weight (kg): 0.22

Packaged weight (kg): 0.26

Packaging: 120mm x 70mm x 120mm



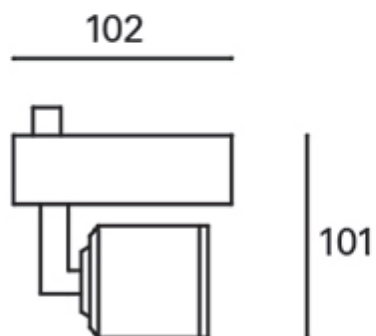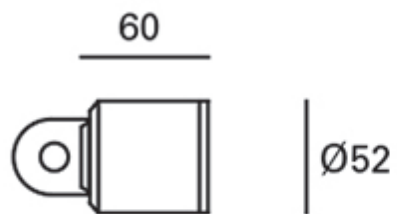



TC-8000-BLA

Structure material: Steel
Dimensions: 34 x 2000 x 17
Net weight (kg): 0.98

Luminaire


Code TC-0306-BLA
 Name Projector led 7W 3000K

Measur.

Code CL116A17F084G
 Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	52 mm 48 mm	Height Height	145 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001810 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000438 m2	
Coordinate system Date Measurement Distance		CG 15-03-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 90 420.97 lm	
Operator Temperature Humidity Notes		Asselum T3 25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell			

Line		Code	Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		CL116A17F084G	Name	CL116A17F084G	420.97	6.93	1
C.I.E.	98 99 100 100 100		D DIN 5040		A60		
F UTE	--		B NBN		BZ 1		

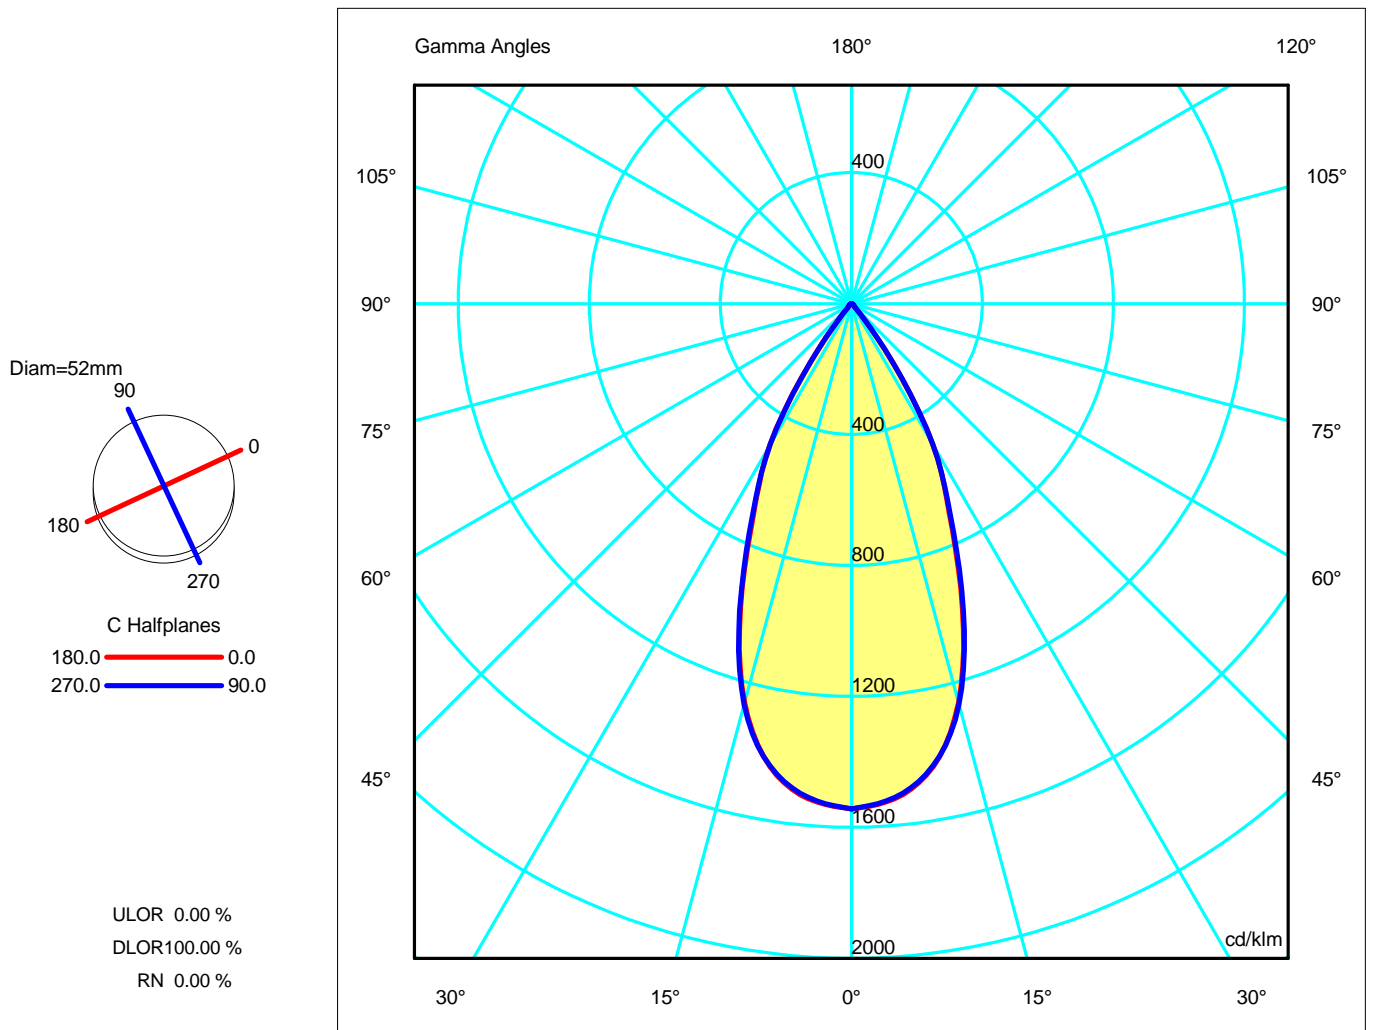



Luminaire

Code TC-0306-BLA
 Name Proyector led 7W 3000K

Measur.

Code CL116A17F084G
 Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	1543.02	1543.02	1543.02	1543.02	1543.02	1543.02	1543.02
G 5.0	1517.77	1518.33	1518.10	1514.82	1513.99	1512.34	1514.12
G 10.0	1435.62	1437.29	1436.93	1435.65	1436.09	1435.67	1433.53
G 15.0	1261.33	1266.95	1263.92	1266.67	1259.45	1261.47	1267.36
G 20.0	991.31	993.96	988.70	996.96	1000.27	1003.52	998.08
G 25.0	706.96	711.94	708.76	709.44	707.72	715.27	716.88
G 30.0	497.87	494.73	491.40	496.60	497.18	499.32	495.25
G 35.0	221.55	230.97	223.17	231.68	222.72	228.30	219.28
G 40.0	41.60	41.80	41.76	42.90	42.03	43.42	43.04
G 45.0	14.21	14.48	14.28	14.78	14.67	15.08	14.61
G 50.0	8.61	8.65	8.63	8.68	8.67	8.69	8.70
G 55.0	6.36	6.37	6.38	6.44	6.43	6.46	6.43
G 60.0	4.63	4.66	4.68	4.70	4.74	4.77	4.78
G 65.0	3.03	3.06	3.05	3.07	3.08	3.08	3.10
G 70.0	2.38	2.38	2.39	2.42	2.43	2.45	2.45
G 75.0	2.09	2.09	2.10	2.12	2.15	2.19	2.21
G 80.0	1.89	1.89	1.91	1.94	1.98	2.06	2.08
G 85.0	1.60	1.59	1.59	1.62	1.66	1.73	1.77
G 90.0	1.38	1.36	1.38	1.41	1.48	1.56	1.62

Luminaire

Code TC-0306-BLA
 Name Projector led 7W 3000K

Measur.



Code CL116A17F084G
 Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Diam=52mm

C Halfplanes

180.0 ——— 0.0
 270.0 ——— 90.0

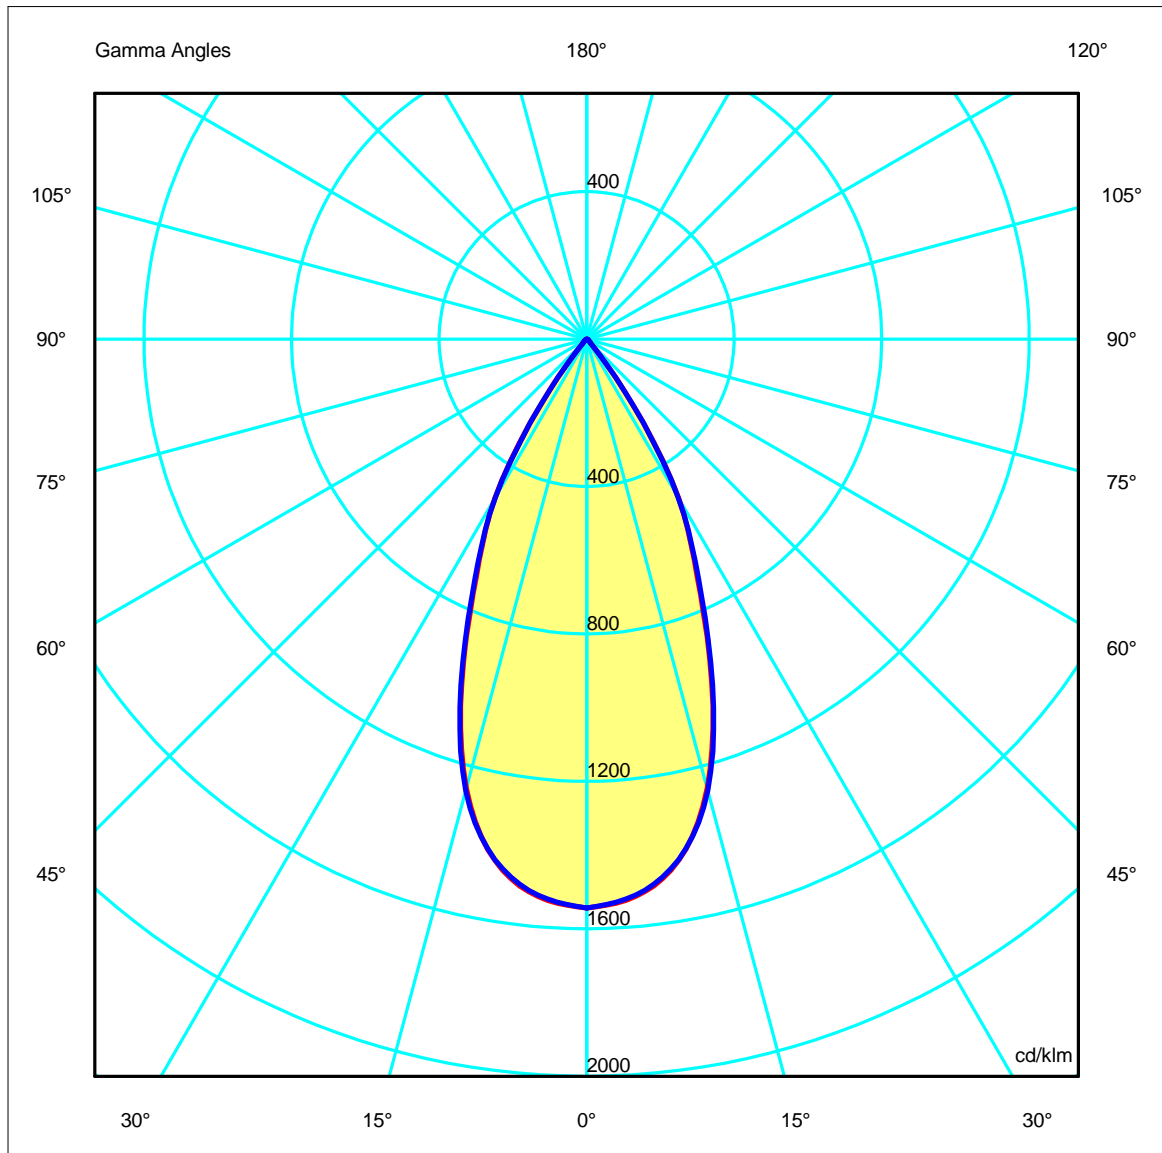

Luminaire

Code TC-0306-BLA
Name Projector led 7W 3000K

Measur.


Code CL116A17F084G
Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.88	1.32	1.76	2.20	OC	0.44	0.89	1.33	1.77	2.22
OB	0.44	0.88	1.32	1.76	2.20	OD	0.44	0.89	1.33	1.77	2.22

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	649.56	638.94	530.98	297.61	93.27	5.98	2.68	1.28	0.88	0.67
OB	649.56	638.94	530.98	297.61	93.27	5.98	2.68	1.28	0.88	0.67
OC	649.56	637.40	533.52	301.79	92.31	6.15	2.71	1.31	0.93	0.75
OD	649.56	637.40	533.52	301.79	92.31	6.15	2.71	1.31	0.93	0.75

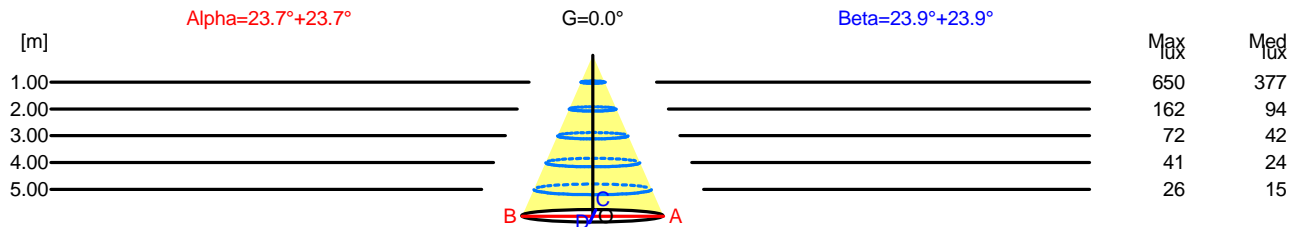

H[m]	D[m]	Max lux	Med lux	Alpha=23.7°+23.7°	G=0.0
1.00	0.88	650	377		
2.00	1.76	162	94		
3.00	2.64	72	42		
4.00	3.52	41	24		
5.00	4.40	26	15		

H[m]	D[m]	Max lux	Med lux	Beta=23.9°+23.9°	G=0.0
1.00	0.89	650	377		
2.00	1.77	162	94		
3.00	2.66	72	42		
4.00	3.55	41	24		
5.00	4.44	26	15		



Luminaire

Code TC-0306-BLA
 Name Proyector led 7W 3000K

Measurement

Code CL116A17F084G
 Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical


UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.4	17.0	16.6	17.2	17.4	16.4	17.0	16.6	17.2	17.4
x=2H y=3H	16.3	16.9	16.6	17.1	17.3	16.3	16.9	16.5	17.1	17.3
x=2H y=4H	16.2	16.8	16.5	17.0	17.3	16.2	16.8	16.5	17.0	17.3
x=2H y=6H	16.2	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
x=2H y=8H	16.2	16.7	16.6	17.0	17.3	16.2	16.7	16.6	17.0	17.3
x=2H y=12H	16.2	16.7	16.6	17.0	17.4	16.3	16.7	16.6	17.0	17.4
x=4H y=2H	16.2	16.7	16.5	17.0	17.3	16.2	16.7	16.5	17.0	17.3
x=4H y=3H	16.1	16.6	16.4	16.9	17.2	16.1	16.6	16.4	16.9	17.2
x=4H y=4H	16.1	16.5	16.4	16.8	17.1	16.1	16.5	16.4	16.8	17.1
x=4H y=6H	16.1	16.4	16.5	16.8	17.2	16.1	16.4	16.5	16.8	17.2
x=4H y=8H	16.1	16.4	16.5	16.8	17.2	16.2	16.5	16.6	16.8	17.2
x=4H y=12H	16.2	16.4	16.6	16.8	17.3	16.2	16.5	16.7	16.9	17.3
x=8H y=4H	16.0	16.3	16.4	16.7	17.1	16.0	16.3	16.4	16.7	17.1
x=8H y=6H	16.1	16.3	16.5	16.7	17.2	16.1	16.3	16.5	16.7	17.2
x=8H y=8H	16.1	16.3	16.6	16.7	17.3	16.2	16.3	16.6	16.8	17.3
x=8H y=12H	16.2	16.4	16.7	16.9	17.4	16.3	16.5	16.8	16.9	17.4
x=12H y=4H	16.0	16.2	16.4	16.6	17.0	16.0	16.2	16.4	16.6	17.0
x=12H y=6H	16.0	16.2	16.5	16.7	17.1	16.1	16.2	16.5	16.7	17.1
x=12H y=8H	16.1	16.3	16.6	16.7	17.3	16.2	16.3	16.7	16.8	17.3

Luminaire
 Code TC-0306-BLA
 Name Projector led 7W 3000K
Measur.
 Code CL116A17F084G
 Name Projector led 7W 3000K


Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Diam=52mm



C Halfplanes


180.0 ———— 0.0
 270.0 ———— 90.0

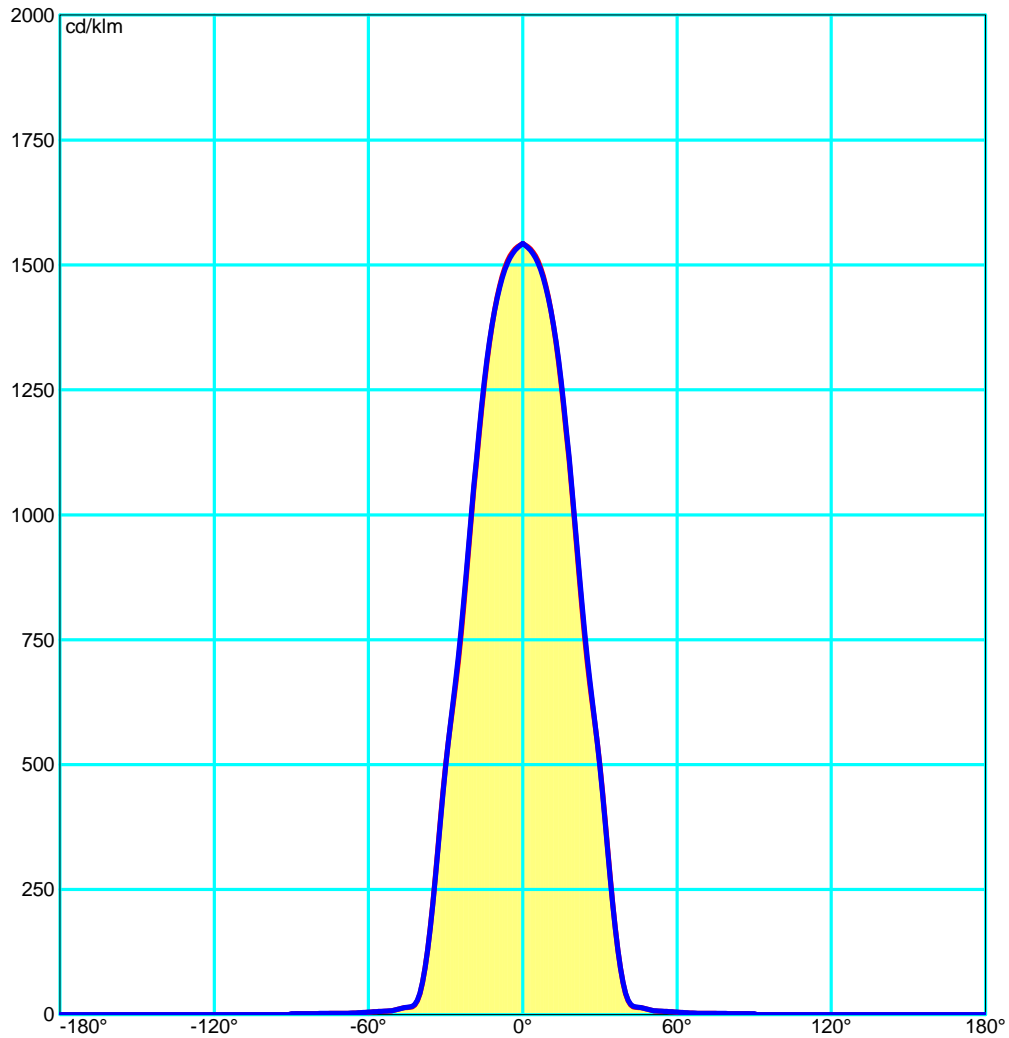

Luminaire
 Code TC-0306-BLA
 Name Projector led 7W 3000K
Measur.
 Code CL116A17F084G
 Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance

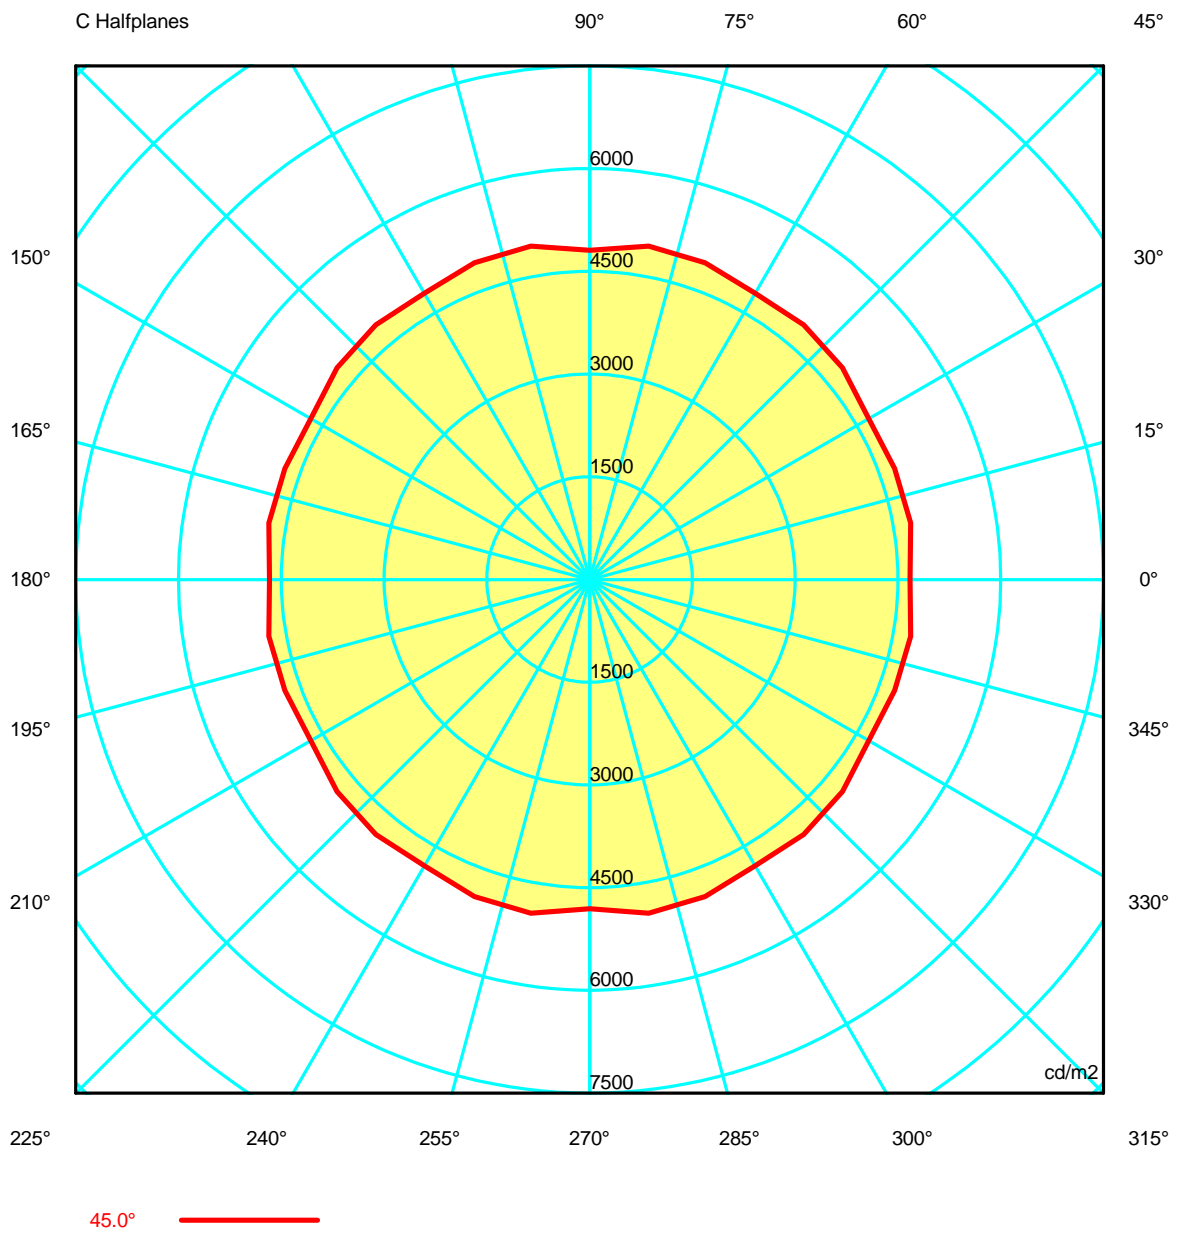



Luminaire

Code TC-0306-BLA
 Name Proyector led 7W 3000K

Measurerm.

Code CL116A17F084G
 Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 Table 1/3

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70
G 5.0	354438.86	354519.84	354616.91	354514.19	353985.03	353643.76	353555.14	353258.82	353219.05	353586.92	353219.05	353258.82	353555.14
G 10.0	339129.73	339431.47	339552.75	339439.37	339207.73	339142.63	339242.55	339226.19	339005.44	338636.03	339005.44	339226.19	339242.55
G 15.0	303784.09	304949.37	304927.61	304406.97	304986.54	304621.43	303331.05	303407.48	304277.90	305234.78	304277.90	303407.48	303331.05
G 20.0	245416.05	246147.07	245574.18	244769.82	246029.53	247246.69	247635.01	248304.12	248218.54	247092.14	248218.54	248304.12	247635.01
G 25.0	181466.57	182562.09	182556.50	181928.98	182074.20	181956.60	181660.95	182917.04	183737.97	184014.18	183737.97	182917.04	181660.95
G 30.0	133742.14	133256.07	132447.44	132004.12	132927.14	133451.22	133554.52	134014.73	133955.96	133037.52	133955.96	134014.73	133554.52
G 35.0	62920.50	65356.22	64866.61	63379.32	65192.06	65204.45	63252.97	64288.59	64550.87	62275.68	64550.87	64288.59	63252.97
G 40.0	12632.73	12696.44	12689.91	12681.51	12960.62	12952.86	12763.38	13035.43	13223.94	13070.80	13223.94	13035.43	12763.38
G 45.0	4674.40	4756.36	4736.48	4699.64	4814.37	4858.99	4827.86	4925.62	4945.46	4808.11	4945.46	4925.62	4827.86
G 50.0	3117.69	3127.65	3126.46	3123.23	3136.29	3141.77	3136.91	3142.78	3147.50	3148.85	3147.50	3142.78	3136.91
G 55.0	2577.72	2582.61	2584.64	2586.90	2604.80	2611.83	2607.60	2615.16	2617.49	2607.15	2617.49	2615.16	2607.60
G 60.0	2155.63	2163.99	2172.42	2179.68	2184.79	2192.68	2204.58	2216.39	2223.60	2226.18	2223.60	2216.39	2204.58
G 65.0	1669.81	1684.55	1684.02	1676.96	1685.85	1691.83	1692.74	1693.72	1697.69	1707.76	1697.69	1693.72	1692.74
G 70.0	1617.90	1618.65	1621.20	1628.67	1638.67	1646.60	1652.74	1660.87	1666.60	1668.54	1666.60	1660.87	1652.74
G 75.0	1881.33	1878.25	1877.98	1883.99	1898.44	1916.00	1935.47	1958.66	1975.90	1984.95	1975.90	1958.66	1935.47
G 80.0	2534.09	2532.71	2536.89	2554.21	2588.14	2619.13	2656.30	2723.98	2772.10	2783.96	2772.10	2723.98	2656.30
G 85.0	4263.24	4247.24	4240.28	4251.04	4285.68	4342.28	4432.28	4563.74	4672.14	4737.34	4672.14	4563.74	4432.28
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



Luminaire

Code TC-0306-BLA
 Name Proyector led 7W 3000K

Measuram.

Code CL116A17F084G
 Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70
G 5.0	353643.76	353985.03	354514.19	354616.91	354519.84	354438.86	354519.84	354616.91	354514.19	353985.03	353643.76	353555.14	353258.82
G 10.0	339142.63	339207.73	339439.37	339552.75	339431.47	339129.73	339431.47	339552.75	339439.37	339207.73	339142.63	339242.55	339226.19
G 15.0	304621.43	304986.54	304406.97	304927.61	304949.37	303784.09	304949.37	304927.61	304406.97	304986.54	304621.43	303331.05	303407.48
G 20.0	247246.69	246029.53	244769.82	245574.18	246147.07	245416.05	246147.07	245574.18	244769.82	246029.53	247246.69	247635.01	248304.12
G 25.0	181956.60	182074.20	181928.98	182556.50	182562.09	181466.57	182562.09	182556.50	181928.98	182074.20	181956.60	181660.95	182917.04
G 30.0	133451.22	132927.14	132004.12	132447.44	133256.07	133742.14	133256.07	132447.44	132004.12	132927.14	133451.22	133554.52	134014.73
G 35.0	65204.45	65192.06	63379.32	64866.61	65356.22	62920.50	65356.22	64866.61	63379.32	65192.06	65204.45	63252.97	64288.59
G 40.0	12952.86	12960.62	12681.51	12689.91	12696.44	12632.73	12696.44	12689.91	12681.51	12960.62	12952.86	12763.38	13035.43
G 45.0	4858.99	4814.37	4699.64	4736.48	4756.36	4674.40	4756.36	4736.48	4699.64	4814.37	4858.99	4827.86	4925.62
G 50.0	3141.77	3136.29	3123.23	3126.46	3127.65	3117.69	3127.65	3126.46	3123.23	3136.29	3141.77	3136.91	3142.78
G 55.0	2611.83	2604.80	2586.90	2584.64	2582.61	2577.72	2582.61	2584.64	2586.90	2604.80	2611.83	2607.60	2615.16
G 60.0	2192.68	2184.79	2179.68	2172.42	2163.99	2155.63	2163.99	2172.42	2179.68	2184.79	2192.68	2204.58	2216.39
G 65.0	1691.83	1685.85	1676.96	1684.02	1684.55	1669.81	1684.55	1684.02	1676.96	1685.85	1691.83	1692.74	1693.72
G 70.0	1646.60	1638.67	1628.67	1621.20	1618.65	1617.90	1618.65	1621.20	1628.67	1638.67	1646.60	1652.74	1660.87
G 75.0	1916.00	1898.44	1883.99	1877.98	1878.25	1881.33	1878.25	1877.98	1883.99	1898.44	1916.00	1935.47	1958.66
G 80.0	2619.13	2588.14	2554.21	2536.89	2532.71	2534.09	2532.71	2536.89	2554.21	2588.14	2619.13	2656.30	2723.98
G 85.0	4342.28	4285.68	4251.04	4240.28	4247.24	4263.24	4247.24	4240.28	4251.04	4285.68	4342.28	4432.28	4563.74
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



Luminaire

Code TC-0306-BLA
Name Proyector led 7W 3000K

Measur.

Code CL116A17F084G
Name Proyector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 Table 3/3


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70	358962.70
G 5.0	353219.05	353586.92	353219.05	353258.82	353555.14	353643.76	353985.03	354514.19	354616.91	354519.84
G 10.0	339005.44	338636.03	339005.44	339226.19	339242.55	339142.63	339207.73	339439.37	339552.75	339431.47
G 15.0	304277.90	305234.78	304277.90	303407.48	303331.05	304621.43	304986.54	304406.97	304927.61	304949.37
G 20.0	248218.54	247092.14	248218.54	248304.12	247635.01	247246.69	246029.53	244769.82	245574.18	246147.07
G 25.0	183737.97	184014.18	183737.97	182917.04	181660.95	181956.60	182074.20	181928.98	182556.50	182562.09
G 30.0	133955.96	133037.52	133955.96	134014.73	133554.52	133451.22	132927.14	132004.12	132447.44	133256.07
G 35.0	64550.87	62275.68	64550.87	64288.59	63252.97	65204.45	65192.06	63379.32	64866.61	65356.22
G 40.0	13223.94	13070.80	13223.94	13035.43	12763.38	12952.86	12960.62	12681.51	12689.91	12696.44
G 45.0	4945.46	4808.11	4945.46	4925.62	4827.86	4858.99	4814.37	4699.64	4736.48	4756.36
G 50.0	3147.50	3148.85	3147.50	3142.78	3136.91	3141.77	3136.29	3123.23	3126.46	3127.65
G 55.0	2617.49	2607.15	2617.49	2615.16	2607.60	2611.83	2604.80	2586.90	2584.64	2582.61
G 60.0	2223.60	2226.18	2223.60	2216.39	2204.58	2192.68	2184.79	2179.68	2172.42	2163.99
G 65.0	1697.69	1707.76	1697.69	1693.72	1692.74	1691.83	1685.85	1676.96	1684.02	1684.55
G 70.0	1666.60	1668.54	1666.60	1660.87	1652.74	1646.60	1638.67	1628.67	1621.20	1618.65
G 75.0	1975.90	1984.95	1975.90	1958.66	1935.47	1916.00	1898.44	1883.99	1877.98	1878.25
G 80.0	2772.10	2783.96	2772.10	2723.98	2656.30	2619.13	2588.14	2554.21	2536.89	2532.71
G 85.0	4672.14	4737.34	4672.14	4563.74	4432.28	4342.28	4285.68	4251.04	4240.28	4247.24
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
 Code TC-0306-BLA
 Name Projector led 7W 3000K
Measurement.
 Code CL116A17F084G
 Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 10.3 Tight Tilting Angle:0°

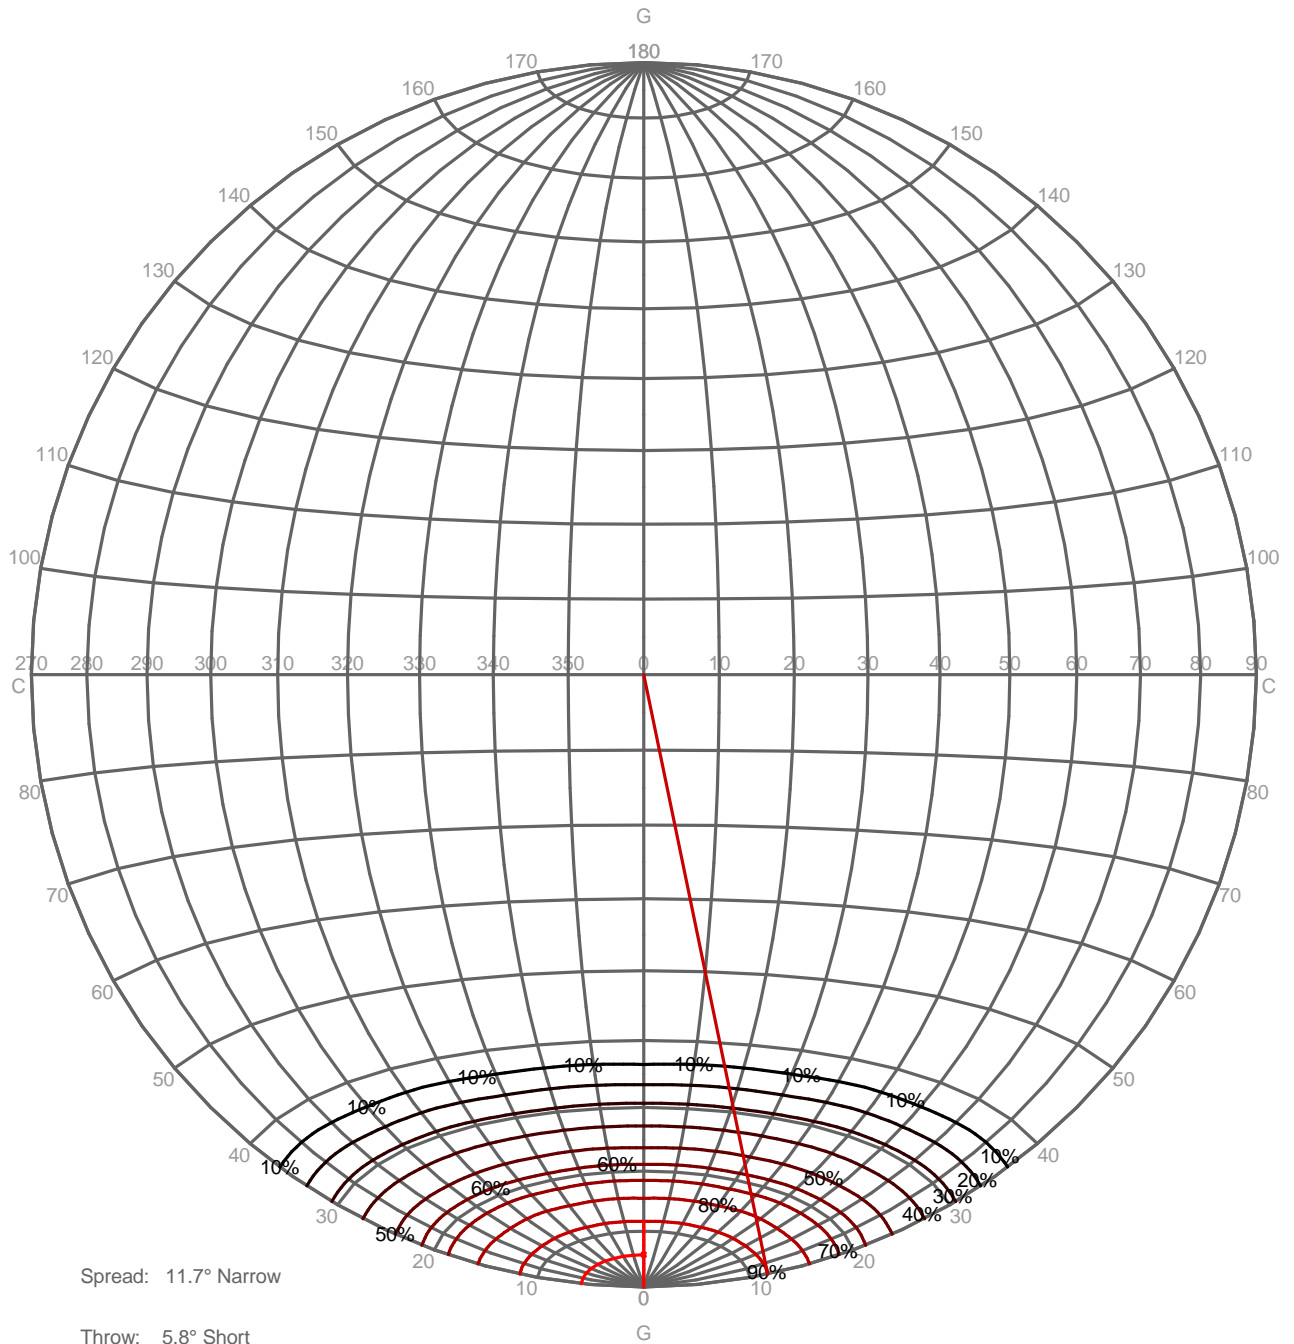


Luminaire
 Code TC-0306-BLA
 Name Projector led 7W 3000K
Measur.
 Code CL116A17F084G
 Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

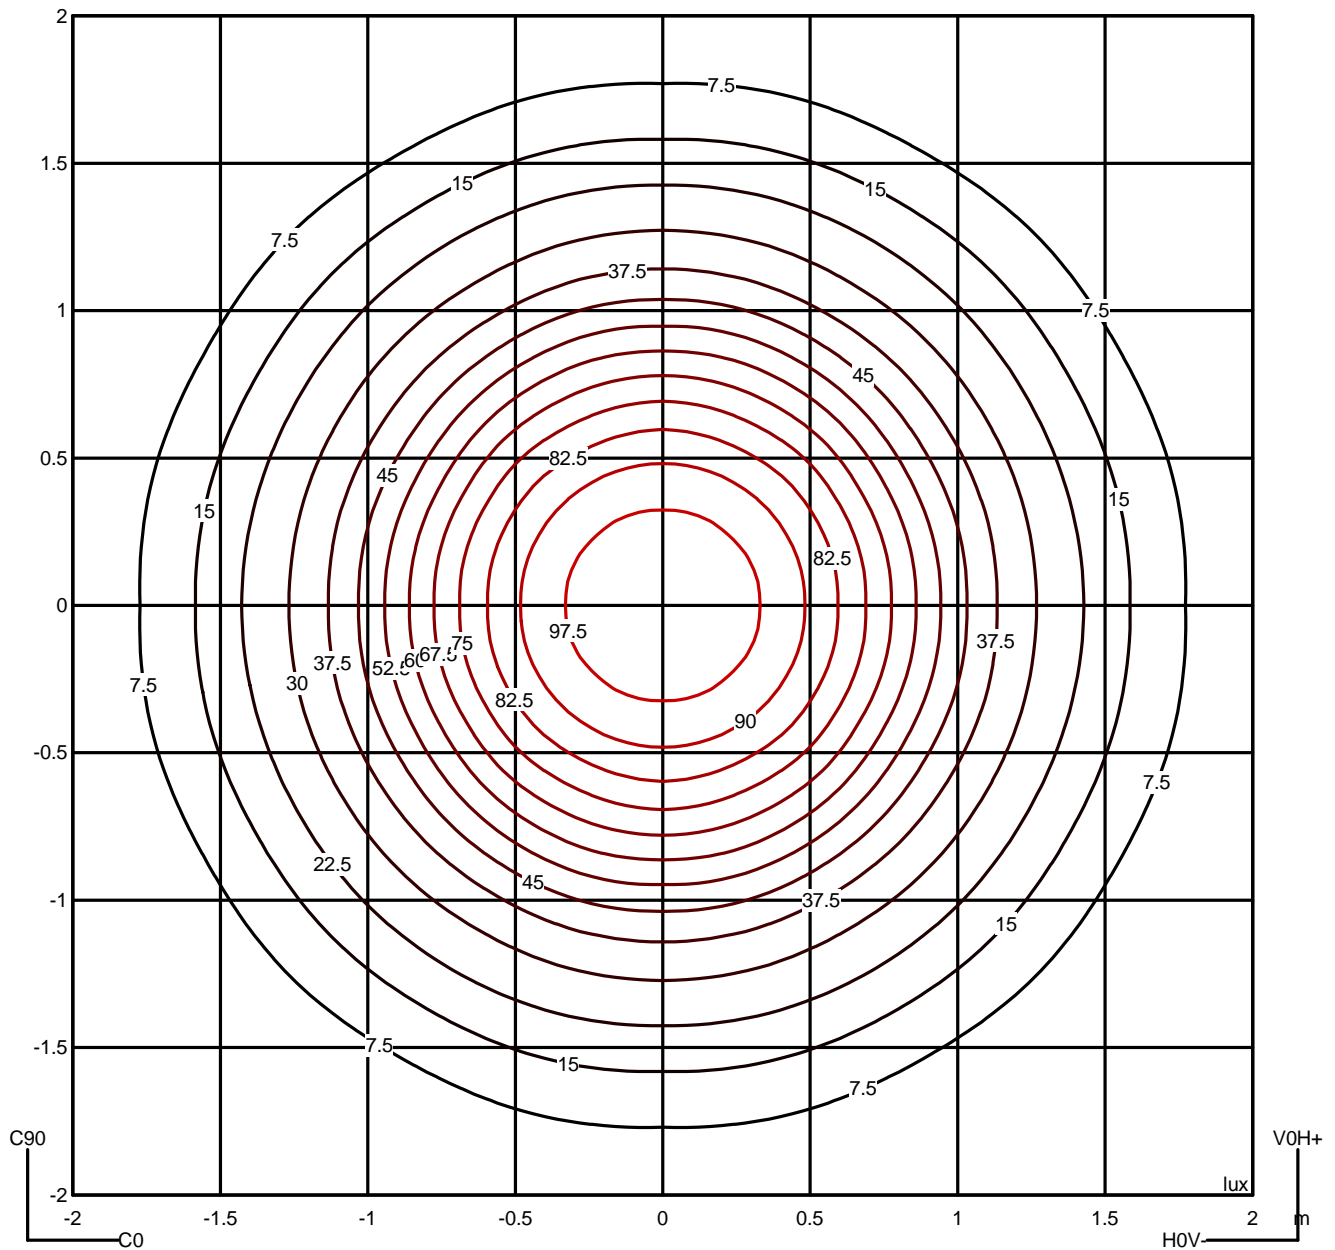




Luminaire
 Code TC-0306-BLA
 Name Projector led 7W 3000K
Measur.
 Code CL116A17F084G
 Name Projector led 7W 3000K

Luminaire Flux	420.97 lm	Luminaire Power	6.93 W	Efficacy	60.75 lm/W	Efficiency	100.00%
Lamps Flux	420.97 lm	Maximum value	1543.02 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

		Average Luminance [cd/m ²]									
		45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	4674	3118	2578	2156	1670	1618	1881	2534	4263	---	
90.0°	4808	3149	2607	2226	1708	1669	1985	2784	4737	---	



Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300				1.15	
B	1		2000	1500	1000	750	500	<300			1.5	
C					2000		1000	500	<300		1.85	
D	2						2000	1000	500	<300	2.2	
E	3							2000	1000	500	<300	2.55

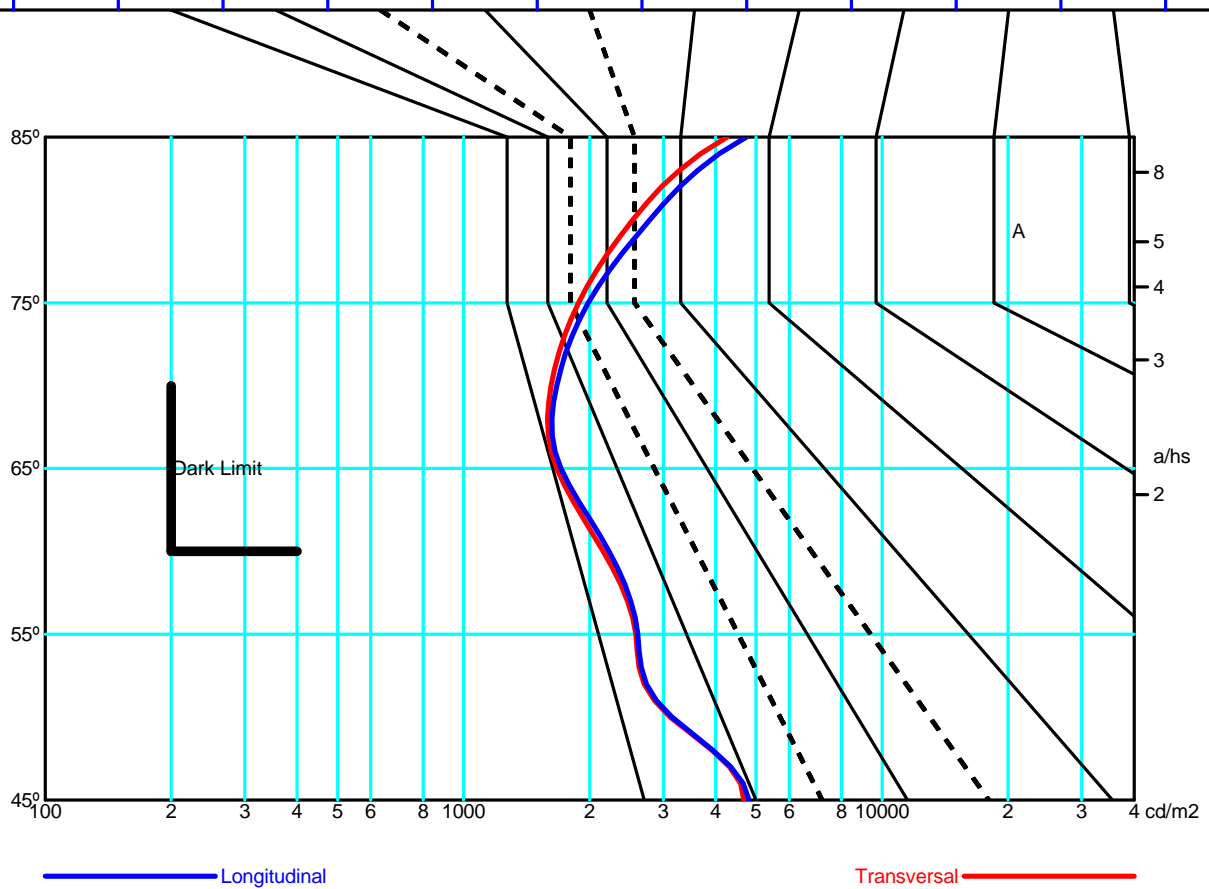


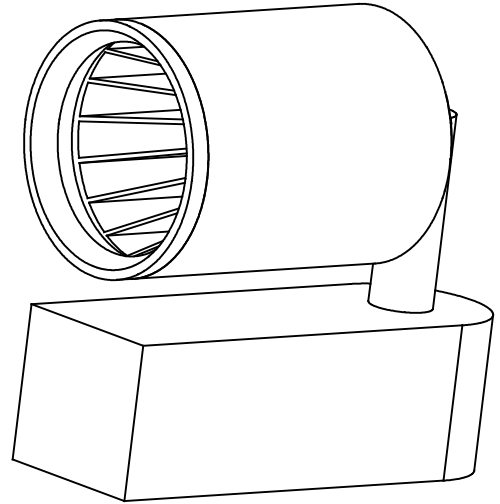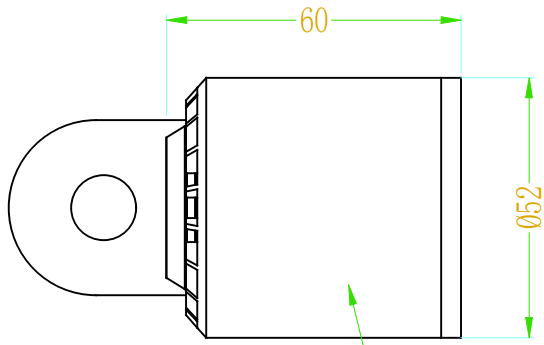

ALUMINUM / WHITE

ALUMINUM / WHITE

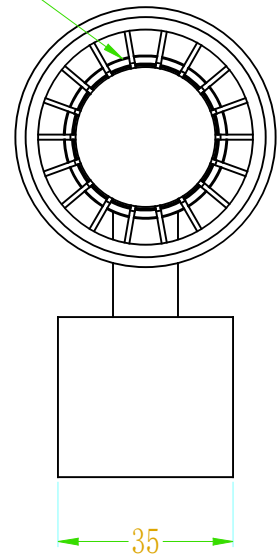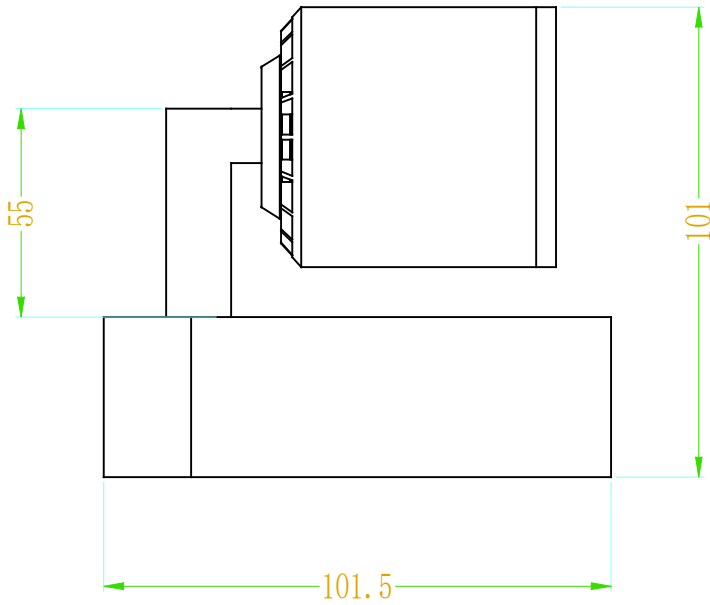



Elit
TC-0306

FOR
LIGHT

