





**Easy Square Surface
400mm**

TC-0414-BLA

LedsC4 Team

Surface-mounted ceiling light Easy Square Surface 400mm IP23 LED 26.4W 4000K ON-OFF White 2300lm

TECHNICAL FEATURES



Luminaire total power : 29.3W

Real lumens : 2300

Nominal lumens : 3375

Real lm/W : 78

Lens / reflector angle : HORIZONTAL 113°

Structure material : Aluminium

Structure finish : White

Diffuser material : Acrylic

Diffuser finish : Opal

Voltage / frequency : 100-240V ~ 50/60Hz

Dimming protocol : ON-OFF

Power Factor : 0.90

Useful life : 36.000h L70B30

Warranty : 5 Years

Easily recyclable luminaire



LUMINOTECHNIC FEATURES

CRI: 80

MacAdam steps: 3

Photobiological risk: RG1

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	26.4W	4000K



LOGISTICS

Net weight (kg): 1.47

Packaged weight (kg): 1.78

Packaging: 410mm x 410mm x 45mm



Luminaire


Code TC-0414-BLA
 Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
 Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	400 mm	Width	400 mm	Height	35 mm
Rectangular Luminous Area		Length	354 mm	Width	354 mm	Height	0 mm
Horizontal Luminous Area	0.125316 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		Glare area at 76°		Glare area at 76°	0.030317 m2
Coordinate system	CG	Symmetry Type		Symmetry Type		Double Symmetrical	
Date	06-10-2017	Maximum Gamma Angle		Maximum Gamma Angle		90	
Measurement Distance	0.00	Measurement Flux		Measurement Flux		2300.41 lm	
Operator	Asselum T2	Source Voltage [V]		Source Voltage [V]			
Temperature	25.00 °C	Source current [A]		Source current [A]			
Humidity	60.00 %	Photocell		Photocell			
Notes							

Line	Code	Luminaire Lamps Name	Flux [lm]	Pow. [W]	Q.ty
	TC-0414-BLA	TC-0414-BLA	2300.41	30.68	1
C.I.E.	47 79 95 100 100	D DIN 5040	A30		
F UTE	1.00 E	B NBN	BZ 5		

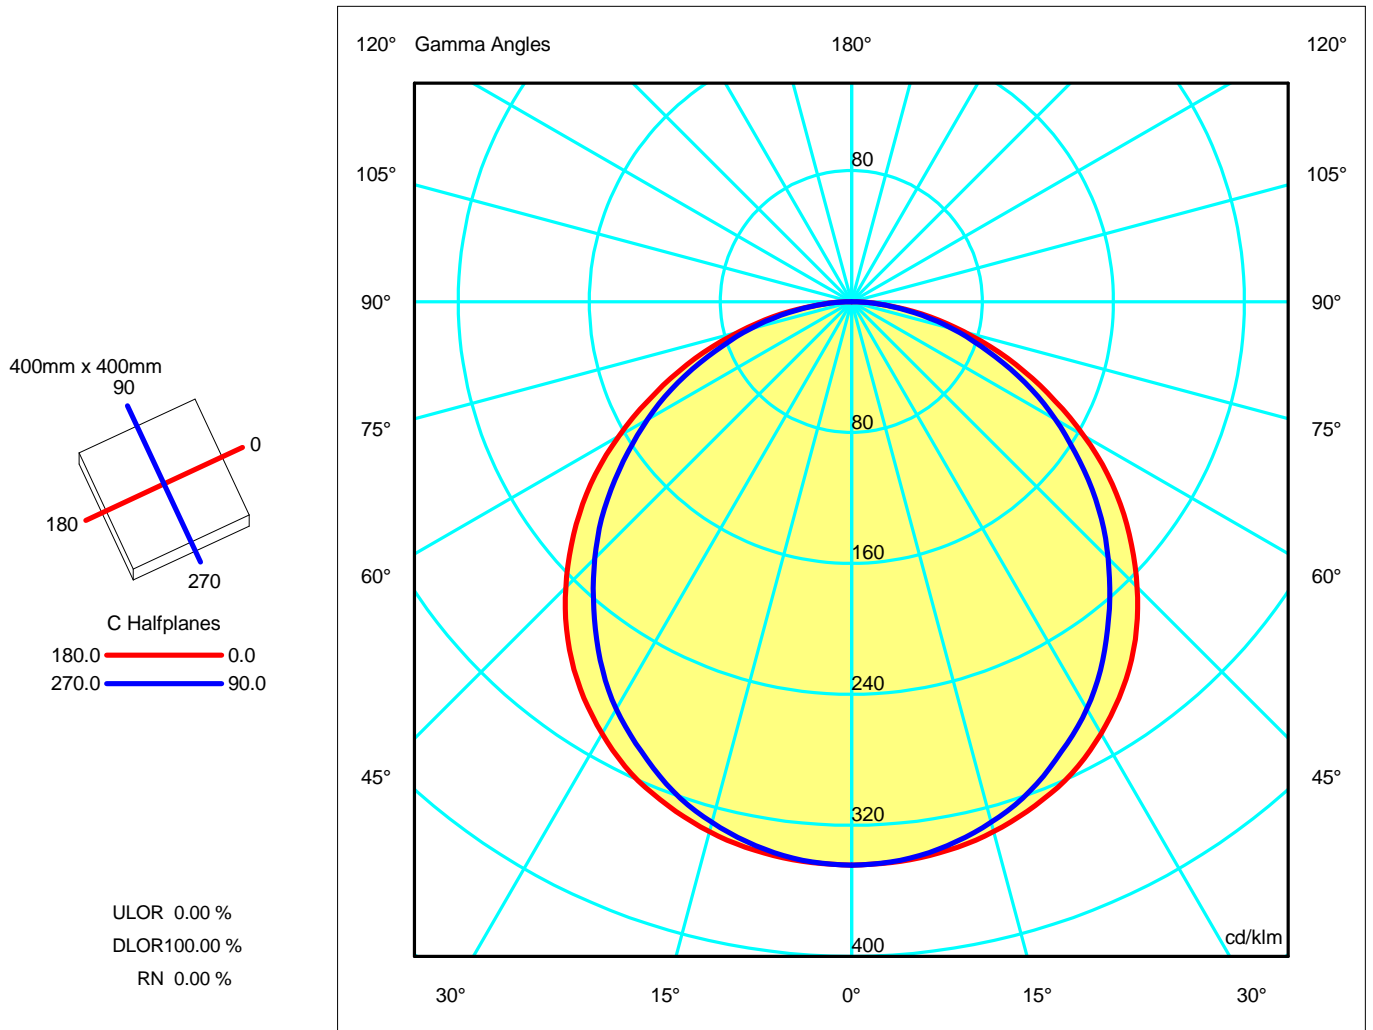



Luminaire

Code TC-0414-BLA
 Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
 Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	344.22	344.22	344.22	344.22	344.22	344.22	344.22
G 5.0	343.24	343.14	343.06	342.78	342.73	342.56	342.62
G 10.0	340.29	340.12	339.66	339.08	338.06	337.78	337.42
G 15.0	335.23	334.78	333.72	332.20	330.77	329.65	329.31
G 20.0	327.58	326.81	325.21	322.49	320.60	318.52	318.37
G 25.0	318.09	317.11	314.15	310.71	306.75	304.76	303.35
G 30.0	304.69	303.48	299.82	295.19	290.95	287.72	287.38
G 35.0	288.66	286.75	282.49	276.29	272.37	268.17	267.37
G 40.0	269.51	267.94	262.91	257.29	250.25	246.84	244.86
G 45.0	246.62	245.02	239.74	233.37	227.20	223.18	221.57
G 50.0	221.43	218.74	214.55	207.28	202.48	197.87	197.03
G 55.0	194.37	192.66	187.26	182.00	175.03	171.97	170.08
G 60.0	163.89	161.78	157.57	152.32	147.68	144.78	143.71
G 65.0	132.04	130.83	127.64	122.65	120.35	116.83	116.82
G 70.0	101.65	101.35	97.50	95.47	91.02	90.69	88.78
G 75.0	70.83	69.97	68.22	66.18	64.60	63.31	63.72
G 80.0	43.57	41.83	42.03	39.20	39.62	38.63	39.02
G 85.0	18.04	18.55	18.02	18.11	16.94	16.93	16.45
G 90.0	0.74	0.79	0.70	0.64	0.62	0.59	0.61

Luminaire

Code TC-0414-BLA
 Name PLAFÓN FORLIGHT LEDS

Measur.



Code TC-0413-BLA
 Name PLAFÓN FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

400mm x 400mm

C Halfplanes

180.0 ——— 0.0
 270.0 ——— 90.0

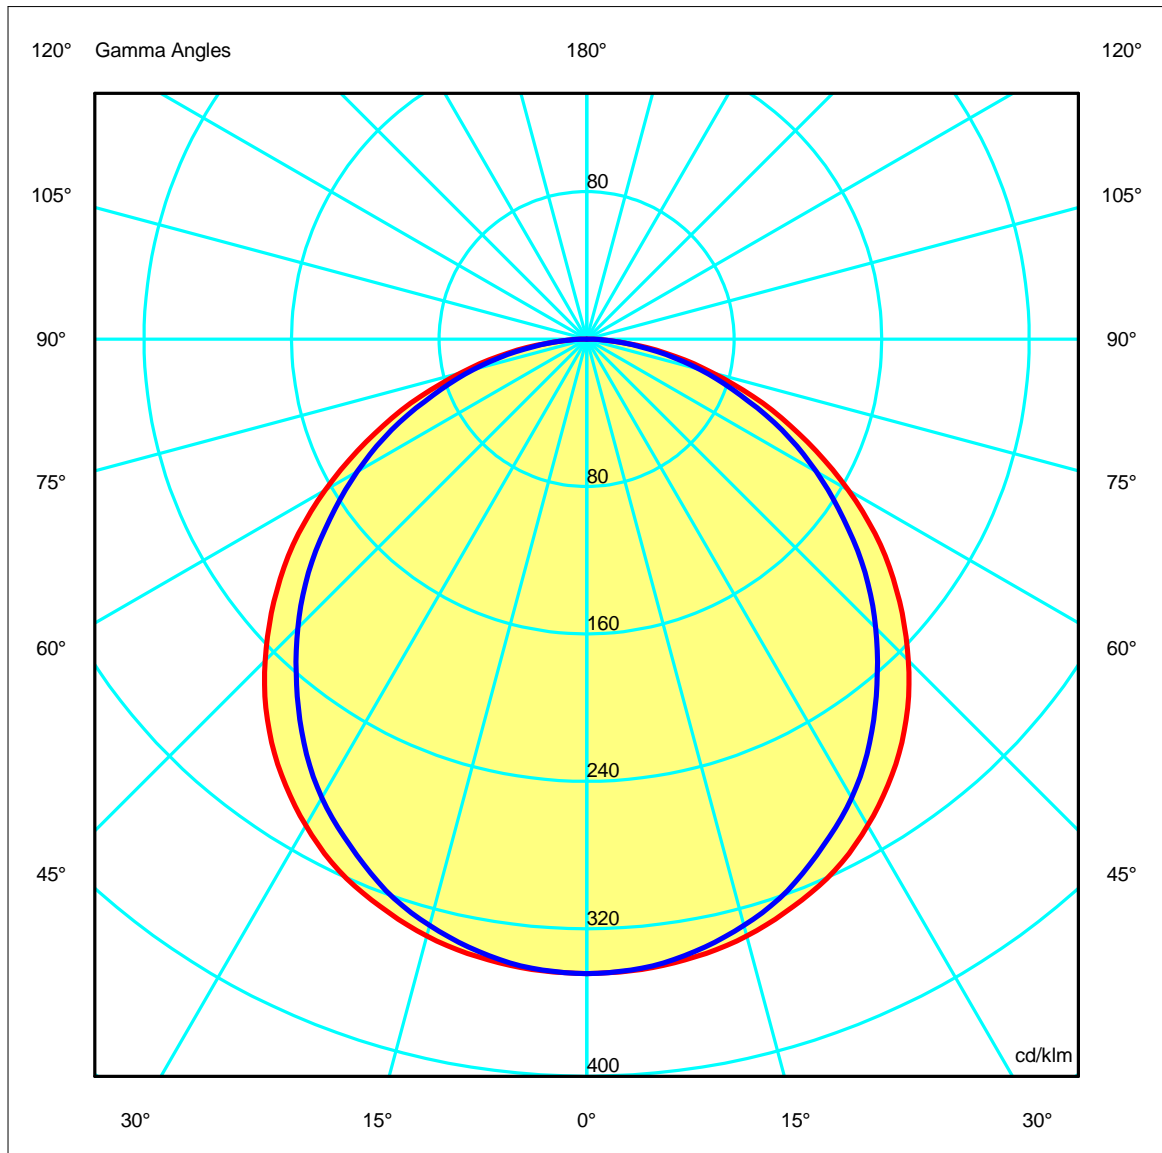

Luminaire

Code TC-0414-BLA
Name PLAFON FORLIGHT LEDS

Measur.


Code TC-0413-BLA
Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.64	3.29	4.93	6.58	8.22	OC	1.41	2.82	4.23	5.63	7.04
OB	1.64	3.29	4.93	6.58	8.22	OD	1.41	2.82	4.23	5.63	7.04

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	791.84	789.60	771.16	731.74	664.03	567.32	447.12	303.75	162.95	41.49
OB	791.84	789.60	771.16	731.74	664.03	567.32	447.12	303.75	162.95	41.49
OC	791.84	788.17	757.55	697.82	615.07	509.70	391.25	268.73	146.59	37.85
OD	791.84	788.17	757.55	697.82	615.07	509.70	391.25	268.73	146.59	37.85

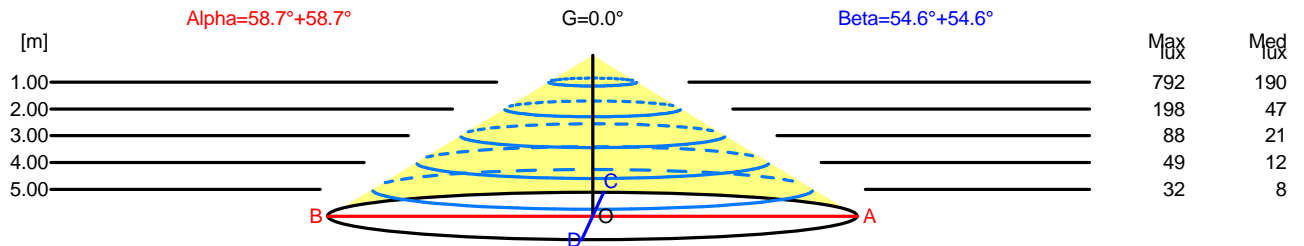

H[m]	D[m]	Max lux	Med lux	Alpha=58.7°+58.7°	G=0.0
1.00	3.29	792	190		
2.00	6.58	198	47		
3.00	9.87	88	21		
4.00	13.16	49	12		
5.00	16.44	32	8		

H[m]	D[m]	Max lux	Med lux	Beta=54.6°+54.6°	G=0.0
1.00	2.82	792	190		
2.00	5.63	198	47		
3.00	8.45	88	21		
4.00	11.27	49	12		
5.00	14.08	32	8		



Luminaire

Code TC-0414-BLA
Name PLAFON FORLIGHT LEDS

Measurement

Code TC-0413-BLA
Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	18.9	20.2	19.2	20.5	20.7	18.3	19.6	18.6	19.8	20.1
x=2H y=3H	20.6	21.8	20.9	22.0	22.3	19.9	21.1	20.2	21.3	21.6
x=2H y=4H	21.2	22.3	21.5	22.6	22.9	20.5	21.6	20.8	21.9	22.2
x=2H y=6H	21.7	22.8	22.1	23.1	23.4	21.0	22.1	21.4	22.4	22.7
x=2H y=8H	21.9	22.9	22.2	23.2	23.5	21.2	22.2	21.5	22.5	22.8
x=2H y=12H	22.0	22.9	22.3	23.3	23.6	21.3	22.2	21.6	22.6	22.9
x=4H y=2H	19.6	20.7	19.9	21.0	21.3	19.1	20.2	19.4	20.5	20.8
x=4H y=3H	21.4	22.4	21.8	22.7	23.1	20.9	21.8	21.2	22.2	22.5
x=4H y=4H	22.2	23.1	22.6	23.4	23.8	21.6	22.5	22.0	22.8	23.2
x=4H y=6H	22.8	23.6	23.2	24.0	24.4	22.2	23.0	22.7	23.4	23.8
x=4H y=8H	23.0	23.7	23.5	24.1	24.6	22.5	23.1	22.9	23.5	24.0
x=4H y=12H	23.2	23.8	23.6	24.2	24.7	22.6	23.2	23.1	23.6	24.1
x=8H y=4H	22.5	23.2	22.9	23.6	24.0	22.0	22.7	22.4	23.1	23.5
x=8H y=6H	23.3	23.8	23.7	24.3	24.7	22.8	23.3	23.2	23.8	24.2
x=8H y=8H	23.6	24.1	24.1	24.5	25.0	23.1	23.5	23.5	24.0	24.5
x=8H y=12H	23.8	24.2	24.3	24.7	25.2	23.3	23.7	23.8	24.2	24.7
x=12H y=4H	22.5	23.2	23.0	23.6	24.0	22.1	22.7	22.5	23.1	23.5
x=12H y=6H	23.3	23.8	23.8	24.3	24.8	22.8	23.3	23.3	23.8	24.3
x=12H y=8H	23.7	24.1	24.2	24.6	25.1	23.2	23.6	23.7	24.1	24.6

Luminaire


Code TC-0414-BLA
 Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
 Name PLAFON FORLIGHT LEDS


Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

400mm x 400mm



C Halfplanes

180.0 ———— 0.0
 270.0 ———— 90.0

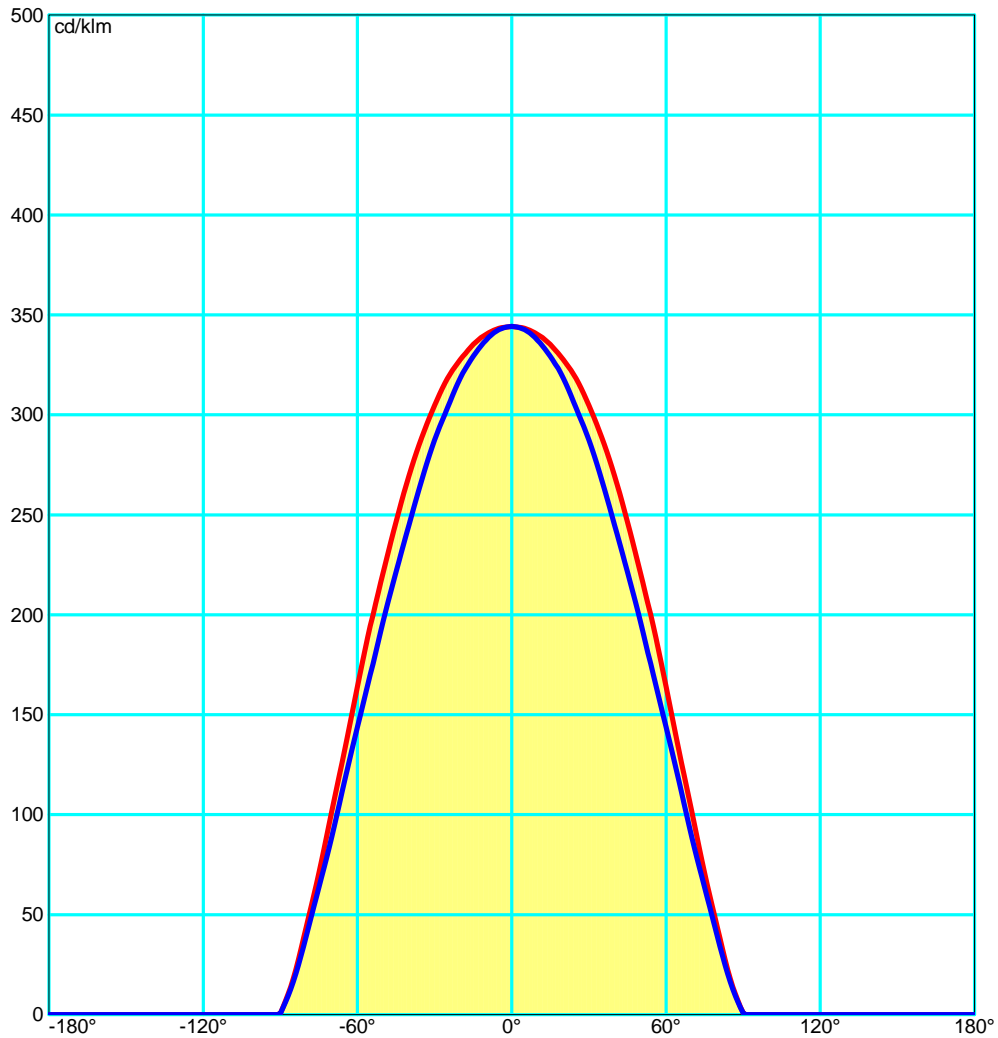

Luminaire


Code TC-0414-BLA
 Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
 Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance

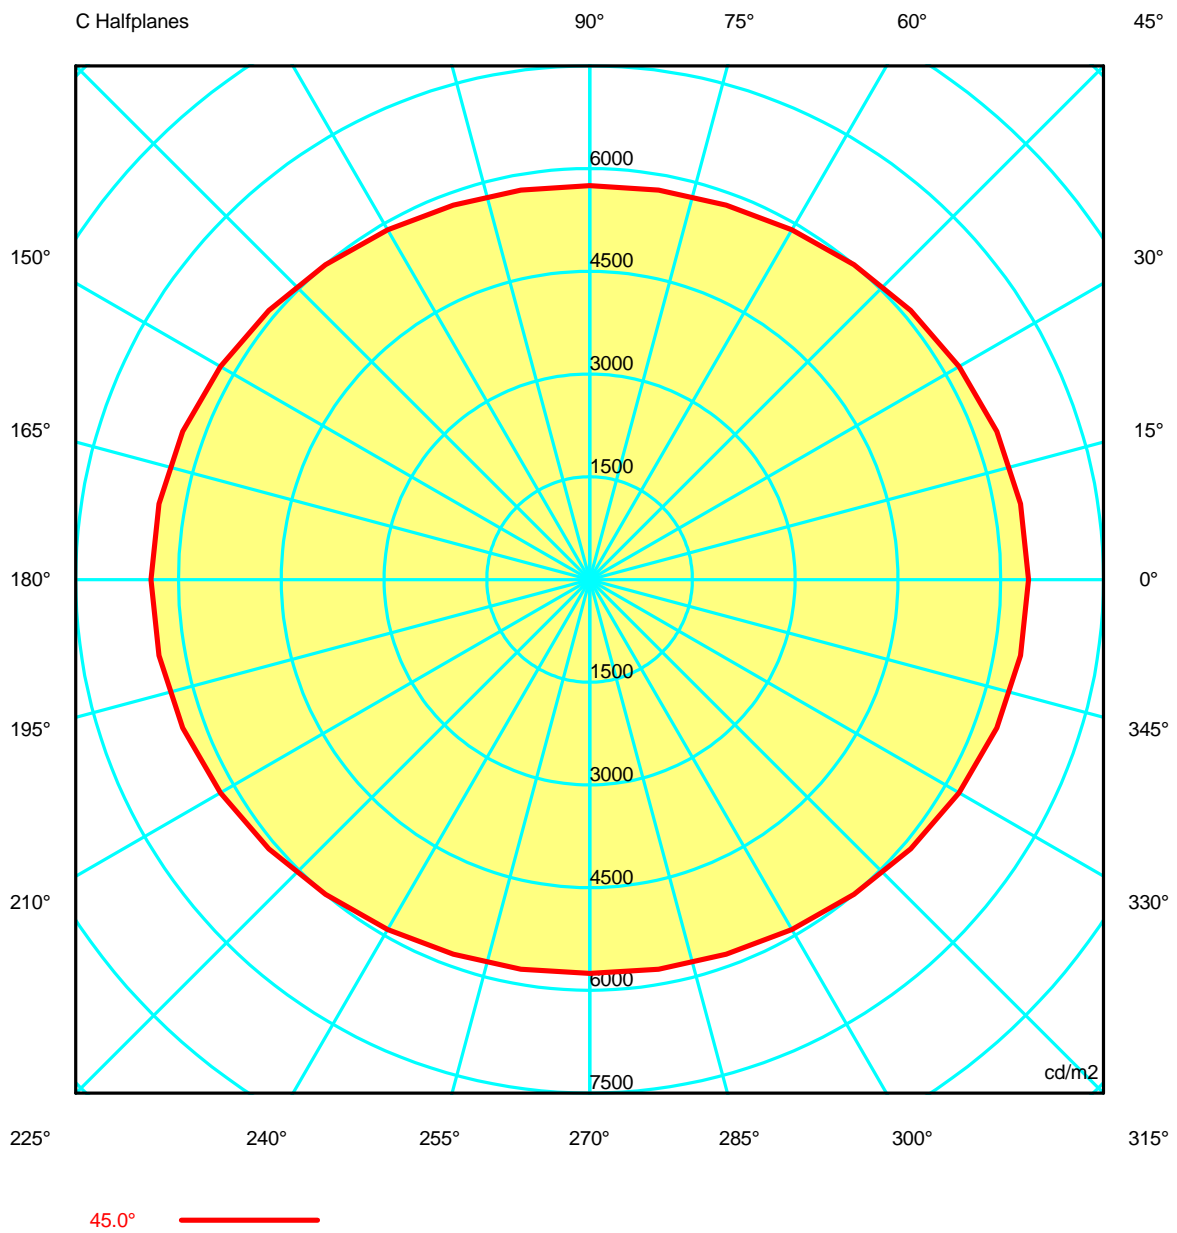



Luminaire

Code TC-0414-BLA
Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 Table 1/3

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75
G 5.0	6324.90	6323.50	6322.84	6321.61	6317.96	6315.84	6315.42	6313.19	6312.16	6313.51	6312.16	6313.19	6315.42
G 10.0	6342.94	6341.49	6337.39	6331.25	6325.07	6313.93	6301.38	6297.10	6294.53	6289.51	6294.53	6297.10	6301.38
G 15.0	6370.79	6366.14	6357.08	6342.10	6323.07	6303.82	6286.16	6270.51	6261.35	6258.38	6261.35	6270.51	6286.16
G 20.0	6399.20	6390.14	6376.66	6352.91	6316.86	6286.51	6262.91	6233.35	6221.25	6219.38	6221.25	6233.35	6262.91
G 25.0	6442.82	6433.51	6406.36	6362.91	6318.16	6265.30	6213.00	6182.82	6163.29	6144.18	6163.29	6182.82	6213.00
G 30.0	6458.37	6445.81	6412.26	6355.28	6289.69	6225.89	6167.17	6115.60	6096.21	6091.40	6096.21	6115.60	6167.17
G 35.0	6468.66	6443.90	6401.72	6330.45	6234.69	6158.69	6103.61	6036.19	6003.58	5991.77	6003.58	6036.19	6103.61
G 40.0	6458.30	6441.46	6386.90	6300.11	6214.66	6107.91	5996.87	5934.06	5898.47	5867.63	5898.47	5934.06	5996.87
G 45.0	6402.33	6383.47	6324.18	6223.70	6114.12	6002.13	5898.23	5820.57	5775.10	5752.06	5775.10	5820.57	5898.23
G 50.0	6323.72	6273.71	6216.55	6127.23	5986.79	5867.41	5782.43	5687.45	5642.84	5626.76	5642.84	5687.45	5782.43
G 55.0	6220.53	6196.66	6115.96	5993.07	5886.22	5749.33	5601.71	5525.15	5483.64	5443.20	5483.64	5525.15	5601.71
G 60.0	6016.92	5971.95	5896.40	5784.84	5656.62	5530.48	5421.97	5342.49	5297.29	5276.23	5297.29	5342.49	5421.97
G 65.0	5735.38	5705.77	5650.01	5544.09	5391.06	5288.24	5227.49	5118.95	5074.58	5074.22	5074.58	5118.95	5227.49
G 70.0	5455.84	5444.88	5376.68	5233.05	5168.60	5045.06	4885.38	4873.34	4848.69	4765.19	4848.69	4873.34	4885.38
G 75.0	5023.89	4988.18	4927.72	4838.76	4739.78	4654.27	4581.50	4510.56	4488.44	4519.64	4488.44	4510.56	4581.50
G 80.0	4606.02	4451.95	4438.16	4443.11	4231.74	4132.40	4188.84	4123.14	4075.94	4125.04	4075.94	4123.14	4188.84
G 85.0	3799.14	3898.68	3874.31	3795.76	3825.18	3742.94	3568.80	3567.34	3551.40	3465.57	3551.40	3567.34	3568.80
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



Luminaire

Code TC-0414-BLA
Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75
G 5.0	6315.84	6317.96	6321.61	6322.84	6323.50	6324.90	6323.50	6322.84	6321.61	6317.96	6315.84	6315.42	6313.19
G 10.0	6313.93	6325.07	6331.25	6337.39	6341.49	6342.94	6341.49	6337.39	6331.25	6325.07	6313.93	6301.38	6297.10
G 15.0	6303.82	6323.07	6342.10	6357.08	6366.14	6370.79	6366.14	6357.08	6342.10	6323.07	6303.82	6286.16	6270.51
G 20.0	6286.51	6316.86	6352.91	6376.66	6390.14	6399.20	6390.14	6376.66	6352.91	6316.86	6286.51	6262.91	6233.35
G 25.0	6265.30	6318.16	6362.91	6406.36	6433.51	6442.82	6433.51	6406.36	6362.91	6318.16	6265.30	6213.00	6182.82
G 30.0	6225.89	6289.69	6355.28	6412.26	6445.81	6458.37	6445.81	6412.26	6355.28	6289.69	6225.89	6167.17	6115.60
G 35.0	6158.69	6234.69	6330.45	6401.72	6443.90	6468.66	6443.90	6401.72	6330.45	6234.69	6158.69	6103.61	6036.19
G 40.0	6107.91	6214.66	6300.11	6386.90	6441.46	6458.30	6441.46	6386.90	6300.11	6214.66	6107.91	5996.87	5934.06
G 45.0	6002.13	6114.12	6223.70	6324.18	6383.47	6402.33	6383.47	6324.18	6223.70	6114.12	6002.13	5898.23	5820.57
G 50.0	5867.41	5986.79	6127.23	6216.55	6273.71	6323.72	6273.71	6216.55	6127.23	5986.79	5867.41	5782.43	5687.45
G 55.0	5749.33	5886.22	5993.07	6115.96	6196.66	6220.53	6196.66	6115.96	5993.07	5886.22	5749.33	5601.71	5525.15
G 60.0	5530.48	5656.62	5784.84	5896.40	5971.95	6016.92	5971.95	5896.40	5784.84	5656.62	5530.48	5421.97	5342.49
G 65.0	5288.24	5391.06	5544.09	5650.01	5705.77	5735.38	5705.77	5650.01	5544.09	5391.06	5288.24	5227.49	5118.95
G 70.0	5045.06	5168.60	5233.05	5376.68	5444.88	5455.84	5444.88	5376.68	5233.05	5168.60	5045.06	4885.38	4873.34
G 75.0	4654.27	4739.78	4838.76	4927.72	4988.18	5023.89	4988.18	4927.72	4838.76	4739.78	4654.27	4581.50	4510.56
G 80.0	4132.40	4231.74	4443.11	4438.16	4451.95	4606.02	4451.95	4438.16	4443.11	4231.74	4132.40	4188.84	4123.14
G 85.0	3742.94	3825.18	3795.76	3874.31	3898.68	3799.14	3898.68	3874.31	3795.76	3825.18	3742.94	3568.80	3567.34
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



Luminaire

Code TC-0414-BLA
Name PLAFON FORLIGHT LEDS

Measur.

Code TC-0413-BLA
Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminance cd/m2 Table 3/3


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75	6318.75
G 5.0	6312.16	6313.51	6312.16	6313.19	6315.42	6315.84	6317.96	6321.61	6322.84	6323.50
G 10.0	6294.53	6289.51	6294.53	6297.10	6301.38	6313.93	6325.07	6331.25	6337.39	6341.49
G 15.0	6261.35	6258.38	6261.35	6270.51	6286.16	6303.82	6323.07	6342.10	6357.08	6366.14
G 20.0	6221.25	6219.38	6221.25	6233.35	6262.91	6286.51	6316.86	6352.91	6376.66	6390.14
G 25.0	6163.29	6144.18	6163.29	6182.82	6213.00	6265.30	6318.16	6362.91	6406.36	6433.51
G 30.0	6096.21	6091.40	6096.21	6115.60	6167.17	6225.89	6289.69	6355.28	6412.26	6445.81
G 35.0	6003.58	5991.77	6003.58	6036.19	6103.61	6158.69	6234.69	6330.45	6401.72	6443.90
G 40.0	5898.47	5867.63	5898.47	5934.06	5996.87	6107.91	6214.66	6300.11	6386.90	6441.46
G 45.0	5775.10	5752.06	5775.10	5820.57	5898.23	6002.13	6114.12	6223.70	6324.18	6383.47
G 50.0	5642.84	5626.76	5642.84	5687.45	5782.43	5867.41	5986.79	6127.23	6216.55	6273.71
G 55.0	5483.64	5443.20	5483.64	5525.15	5601.71	5749.33	5886.22	5993.07	6115.96	6196.66
G 60.0	5297.29	5276.23	5297.29	5342.49	5421.97	5530.48	5656.62	5784.84	5896.40	5971.95
G 65.0	5074.58	5074.22	5074.58	5118.95	5227.49	5288.24	5391.06	5544.09	5650.01	5705.77
G 70.0	4848.69	4765.19	4848.69	4873.34	4885.38	5045.06	5168.60	5233.05	5376.68	5444.88
G 75.0	4488.44	4519.64	4488.44	4510.56	4581.50	4654.27	4739.78	4838.76	4927.72	4988.18
G 80.0	4075.94	4125.04	4075.94	4123.14	4188.84	4132.40	4231.74	4443.11	4438.16	4451.95
G 85.0	3551.40	3465.57	3551.40	3567.34	3568.80	3742.94	3825.18	3795.76	3874.31	3898.68
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
 Code TC-0414-BLA
 Name PLAFON FORLIGHT LEDS
Measur.
 Code TC-0413-BLA
 Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: SLI 6.4 Tight Tilting Angle:0°

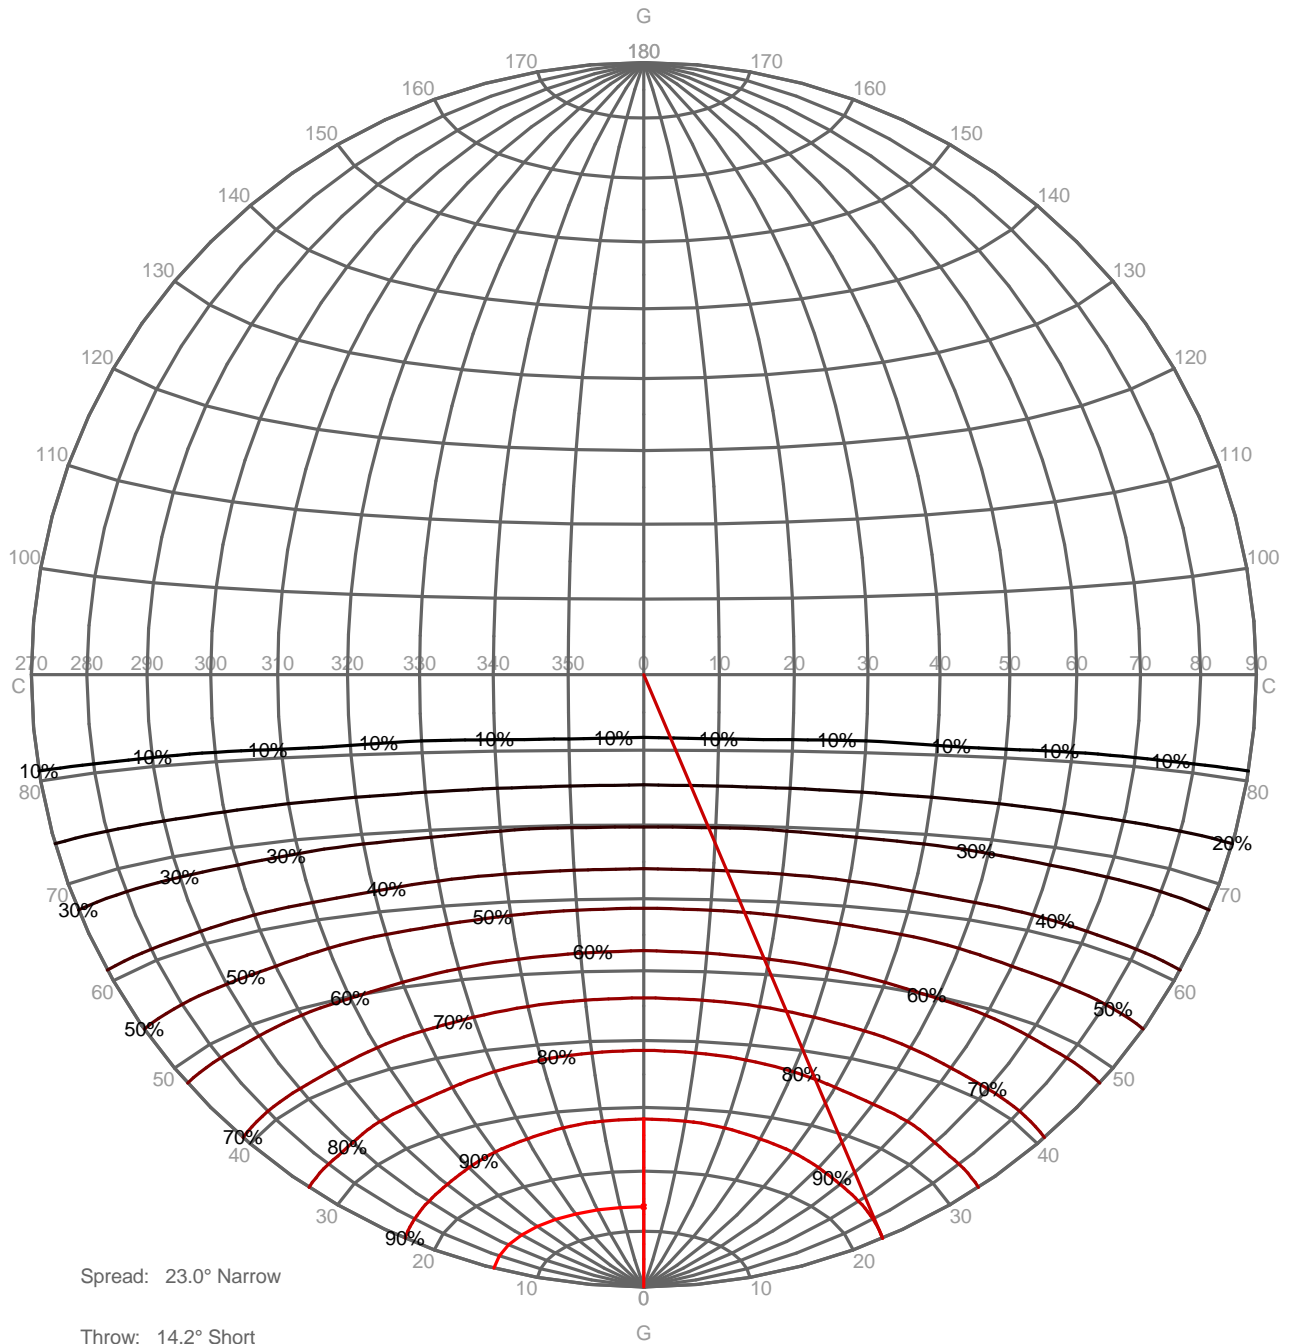

Luminaire

Code TC-0414-BLA
 Name PLAFON FORLIGHT LEDS


Measur.

Code TC-0413-BLA
 Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

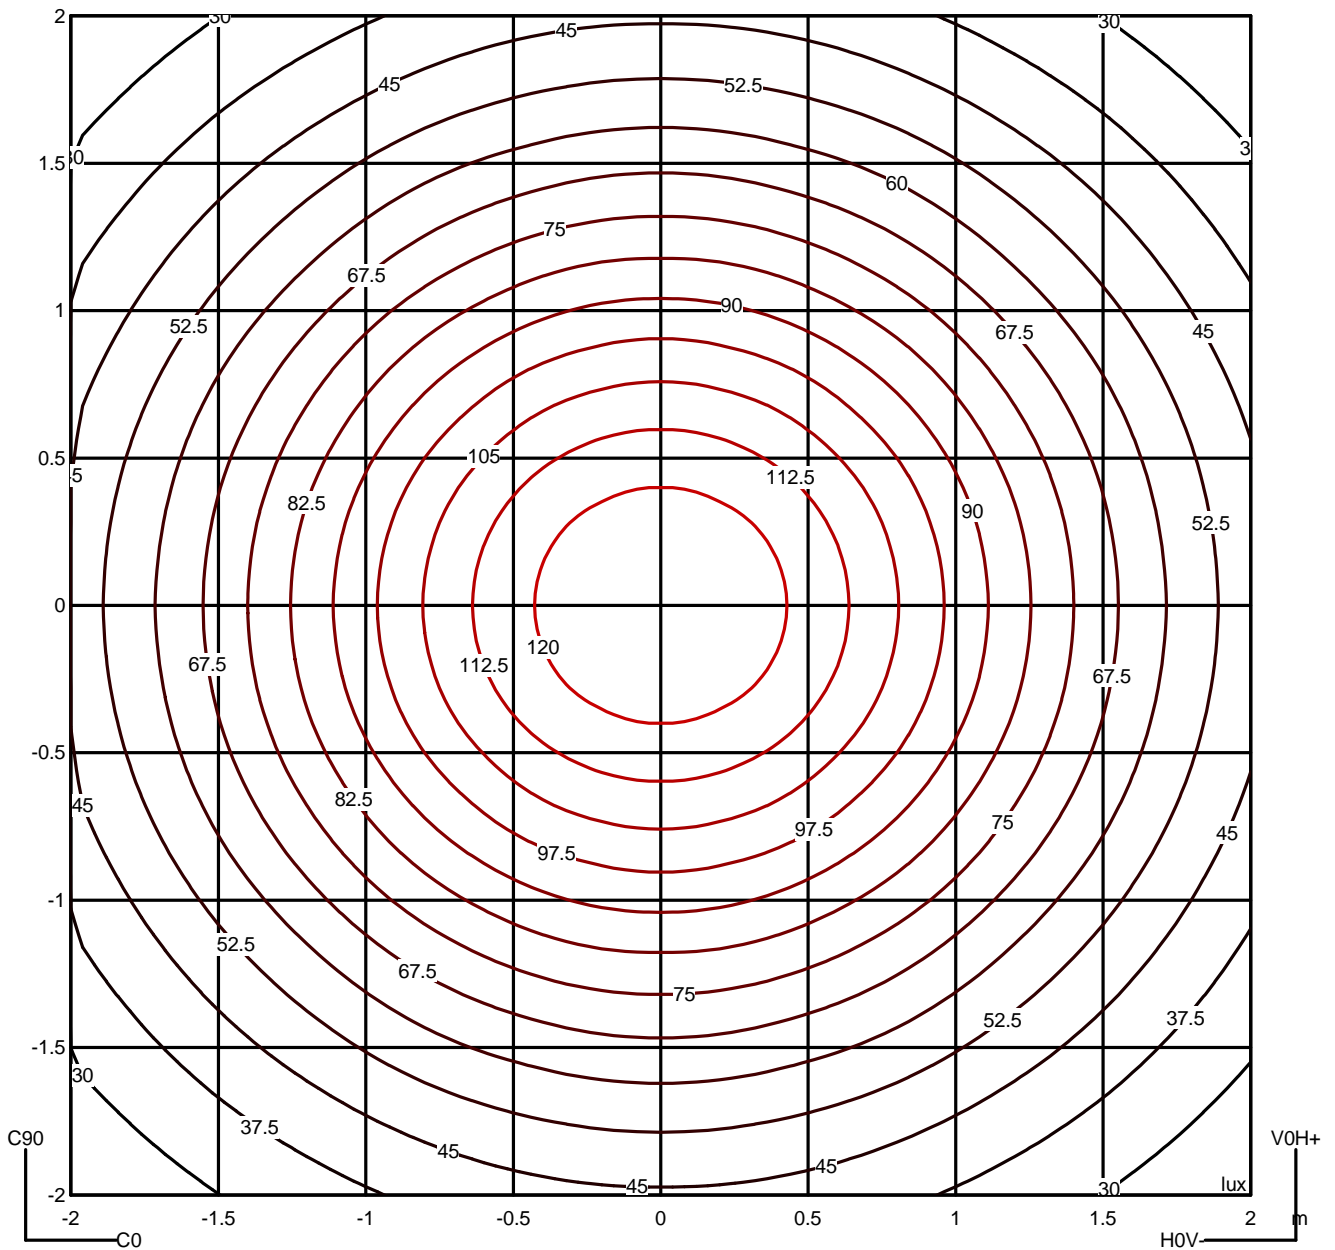

Luminaire

Code TC-0414-BLA
Name PLAFON FORLIGHT LEDS


Measur.


Code TC-0413-BLA
Name PLAFON FORLIGHT LEDS

Luminaire Flux	2300.41 lm	Luminaire Power	30.68 W	Efficacy	74.98 lm/W	Efficiency	100.00%
Lamps Flux	2300.41 lm	Maximum value	344.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

		Average Luminance [cd/m ²]									
		45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	6402	6324	6221	6017	5735	5456	5024	4606	3799	---	
90.0°	5752	5627	5443	5276	5074	4765	4520	4125	3466	--	

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300				1.15	
B	1		2000	1500	1000	750	500	<300			1.5	
C					2000		1000	500	<300		1.85	
D	2						2000	1000	500	<300	2.2	
E	3							2000	1000	500	<300	2.55

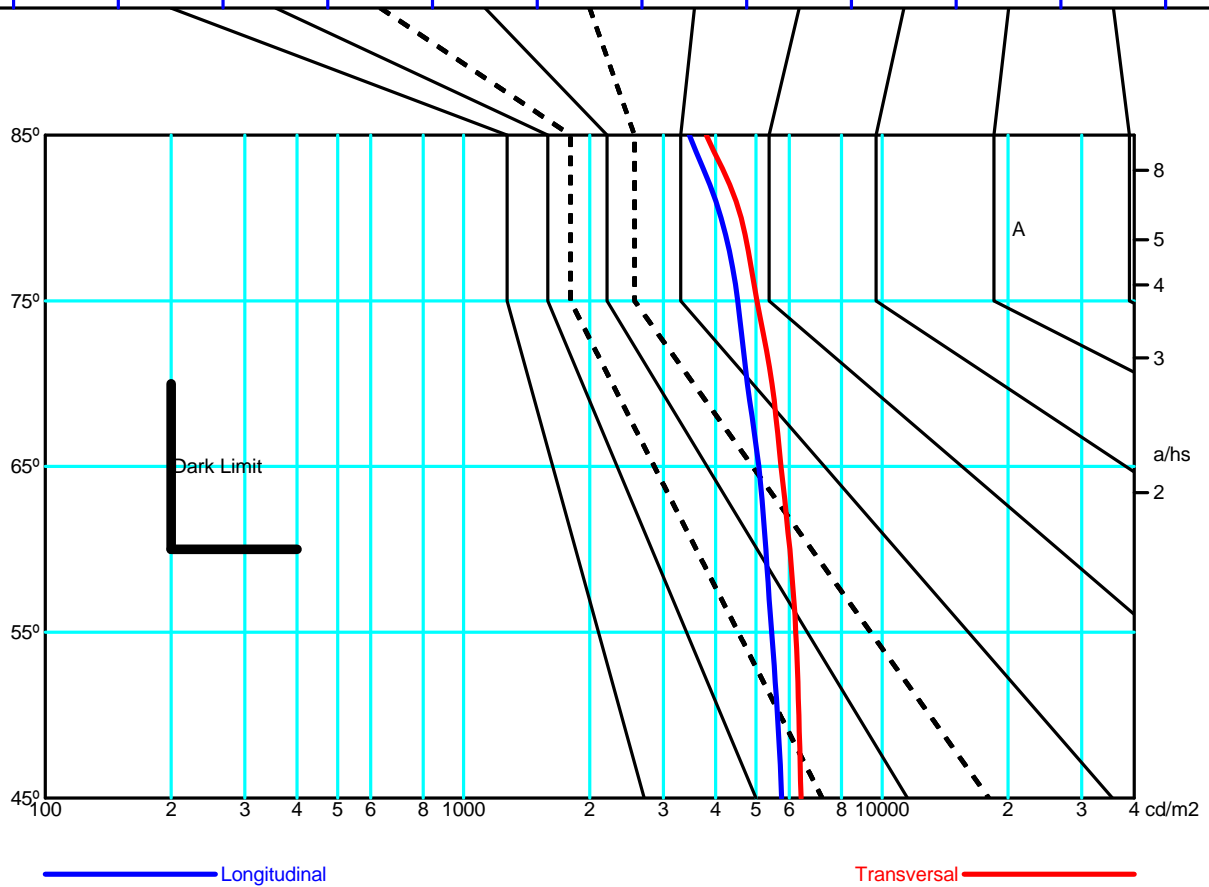

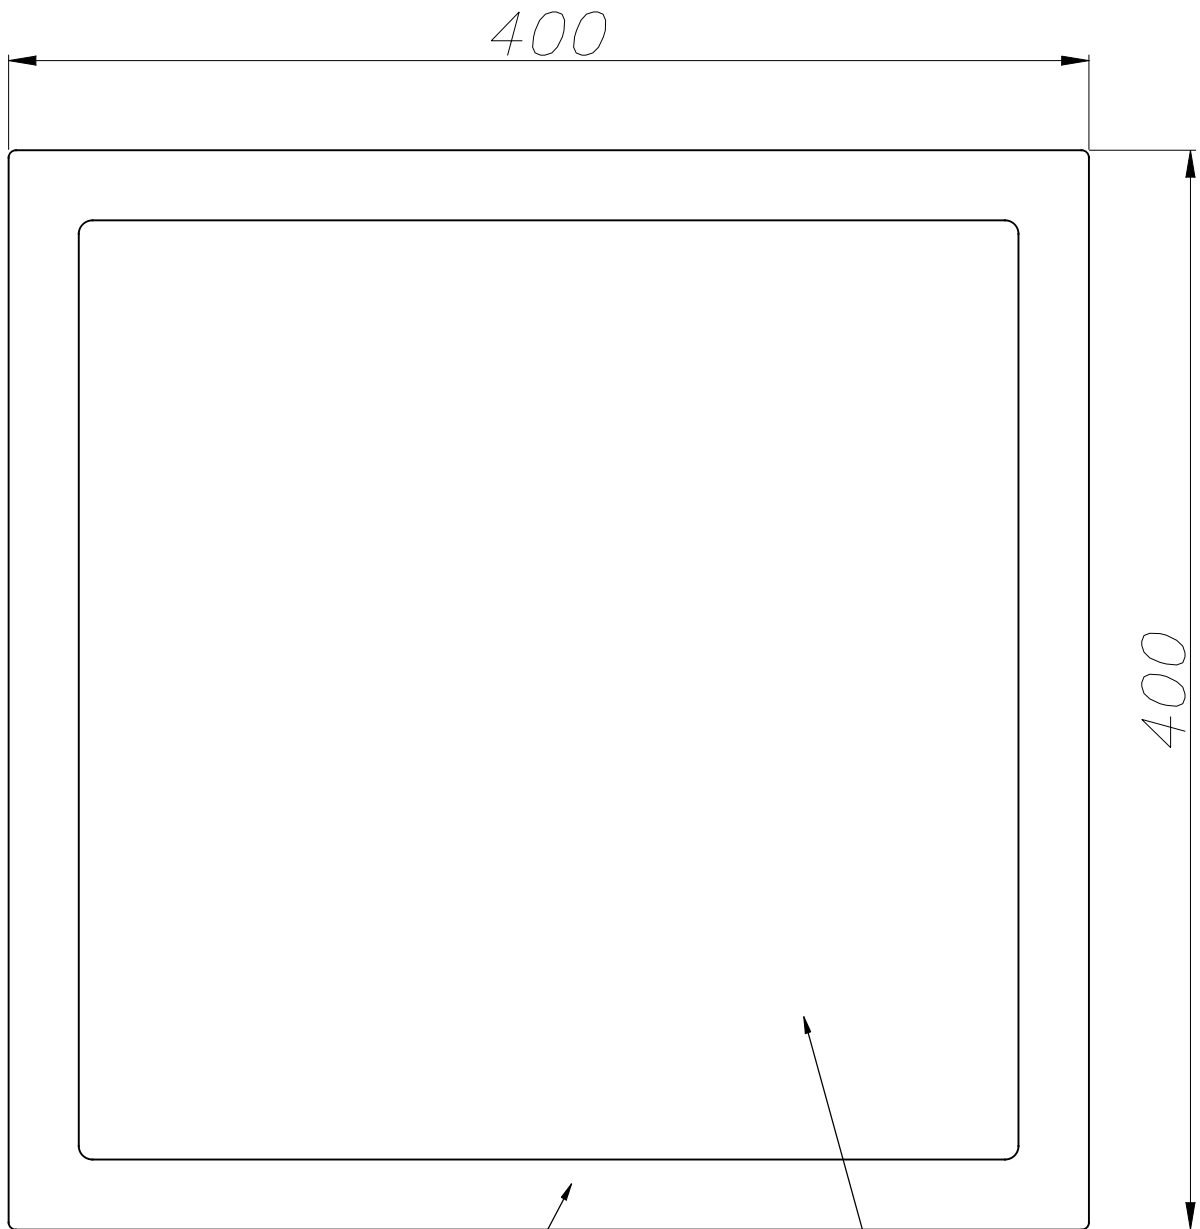





ALUMINIO INYECTADO
INJECTED ALUMINIUM

ACRÍLICO
OPAL





PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

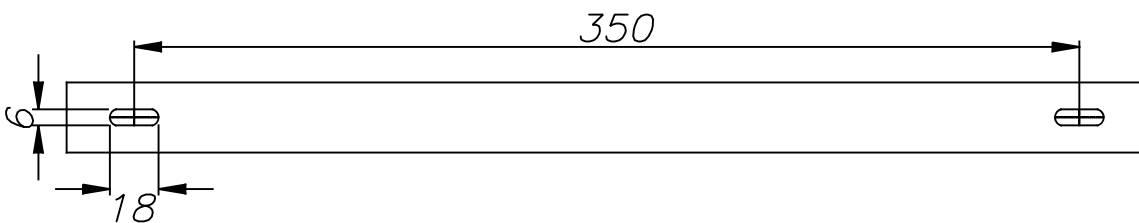

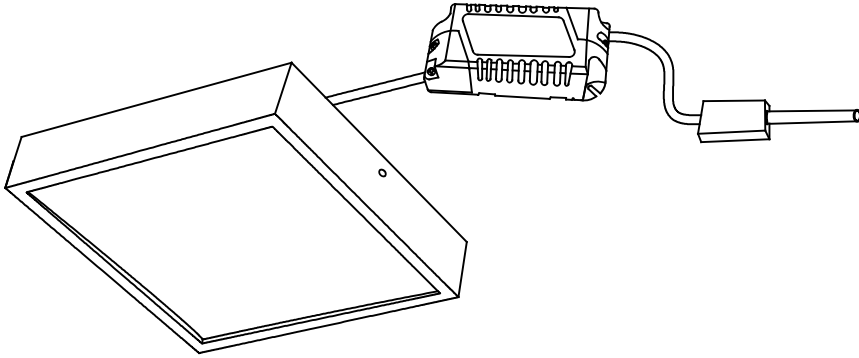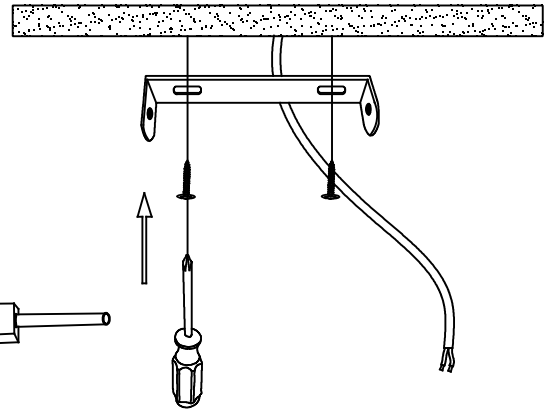

②

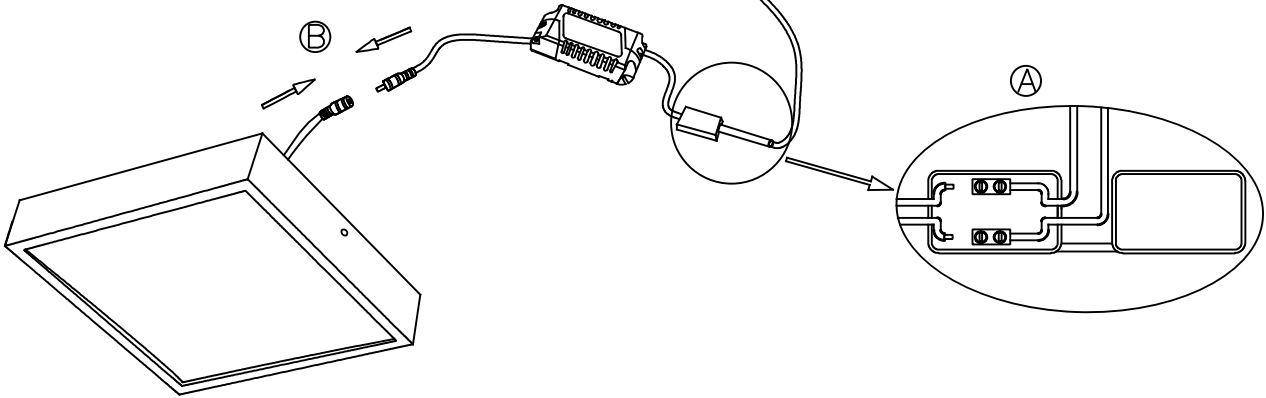

③

