


DE-0265-CEM

Colgante IP20 King E27 15W Cemento 527lm

CARACTERÍSTICAS TÉCNICAS



Potencia total luminaria : 15W

Lúmenes reales : 527

Lm / W reales : 35

Ángulo Ópticas / Reflector : HORIZONTAL 157°

Material de la estructura : Cemento, Acero

Acabado estructura : Cemento

Medida máx. de la bombilla : 110/110 mm

Bombilla recomendada : E27



Voltaje / Frecuencia : 100-240V ~ 50/60Hz

Garantía : 3 Años

Luminaria fácilmente reciclable

CARACTERÍSTICAS LUMINOTÉCNICAS

Portalámparas	Cantidad	Potencia fuente de luz (W)	Temperatura de color correlacionada (CCT)
E27	1	Potencia máx. 15W	-



LOGÍSTICA

Peso neto (Kg): 1.4

Peso embalado (Kg): 2

Embalaje: 245mm x 245mm x 300mm





Luminaire


Code DE-0265-CEM
Name Colgante KING 60W AI E27

Measur.

Code CL116A17FF042G
Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG Double Symmetrical	
Round Luminaire Round Luminous Area		Diam. Diam.	187 mm 111 mm	Height Height	175 mm 15 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.009677 m2 0.001665 m2 0.001665 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.001665 m2 0.001665 m2 0.003957 m2	
Coordinate system Date Measurement Distance		CG 13-02-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 180 527.00 lm	
Operator Temperature Humidity Notes		Asselum T2 25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell			

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	252026	252026	527.00	42.00	1	
C.I.E.	28 61 88 97 42					D DIN 5040
F UTE	0.41 I + 0.01 T					B NBN
						A11 BZ 7 / 1.25 / BZ 6

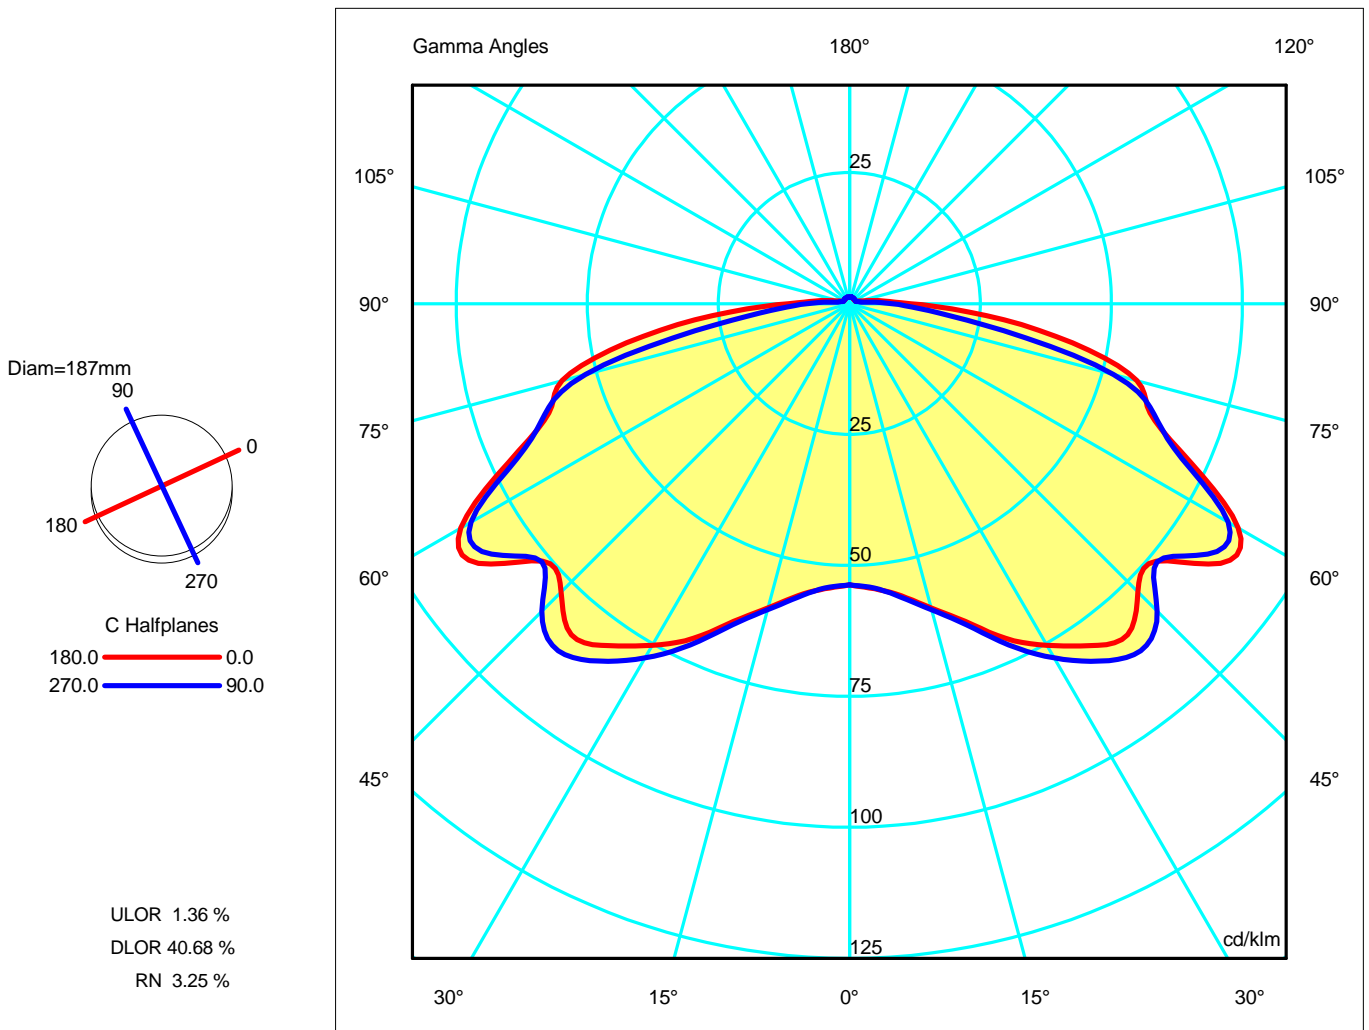



Luminaire

Code DE-0265-CEM
Name Colgante KING 60W AI E27

Measur.

Code CL116A17FF042G
Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	53.70	53.70	53.70	53.70	53.70	53.70	53.70
G 5.0	54.65	54.43	54.41	54.45	54.37	54.42	54.52
G 10.0	56.63	56.57	56.29	56.49	56.63	56.72	56.92
G 15.0	60.14	59.92	59.61	59.93	60.26	60.49	60.49
G 20.0	64.56	64.50	64.50	64.80	64.97	65.41	65.27
G 25.0	70.51	70.69	70.79	70.91	71.23	71.67	71.90
G 30.0	75.34	76.48	76.95	77.71	78.03	78.05	78.10
G 35.0	79.73	80.77	82.36	83.46	83.72	83.32	83.32
G 40.0	82.55	83.90	85.81	86.98	87.30	86.79	86.48
G 45.0	77.80	79.20	81.47	82.64	84.29	83.74	83.01
G 50.0	76.48	78.03	77.83	78.87	80.80	80.07	76.63
G 55.0	86.41	88.89	90.07	87.93	90.80	87.26	83.40
G 60.0	85.62	88.30	89.70	87.09	90.44	87.82	83.40
G 65.0	71.87	75.34	75.92	74.93	78.65	75.83	69.98
G 70.0	61.01	65.21	66.27	64.52	67.42	65.65	61.89
G 75.0	56.77	62.11	62.44	60.59	61.95	57.05	52.18
G 80.0	43.24	43.83	42.84	39.68	38.16	33.22	29.88
G 85.0	26.24	23.79	23.37	21.48	18.12	17.09	15.15
G 90.0	11.70	11.15	11.33	10.55	9.59	8.68	8.20
G 95.0	6.25	5.97	5.94	5.80	5.17	4.14	3.23
G100.0	3.27	3.20	3.23	3.13	2.75	2.18	1.96
G105.0	1.94	1.75	1.79	1.82	1.60	1.52	1.50
G110.0	1.28	1.26	1.30	1.30	1.27	1.27	1.30
G115.0	1.18	1.21	1.22	1.23	1.24	1.25	1.26
G120.0	1.21	1.22	1.22	1.22	1.24	1.27	1.25
G125.0	1.21	1.22	1.22	1.23	1.24	1.27	1.25
G130.0	1.23	1.24	1.23	1.23	1.25	1.26	1.26
G135.0	1.23	1.26	1.27	1.24	1.25	1.26	1.25
G140.0	1.24	1.25	1.25	1.25	1.25	1.26	1.26
G145.0	1.25	1.27	1.26	1.27	1.28	1.28	1.25
G150.0	1.22	1.23	1.24	1.26	1.26	1.28	1.28
G155.0	1.25	1.27	1.25	1.25	1.26	1.28	1.28
G160.0	1.29	1.31	1.32	1.30	1.30	1.31	1.33
G165.0	1.31	1.32	1.33	1.34	1.35	1.35	1.35
G170.0	1.29	1.31	1.31	1.30	1.32	1.36	1.35
G175.0	1.29	1.28	1.25	1.25	1.27	1.29	1.28
G180.0	1.19	1.19	1.19	1.19	1.19	1.19	1.19

Luminaire

Code DE-0265-CEM
 Name Colgante KING 60W AI E27

Measur.



Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Diam=187mm

C Halfplanes

180.0 ———— 0.0
 270.0 ———— 90.0

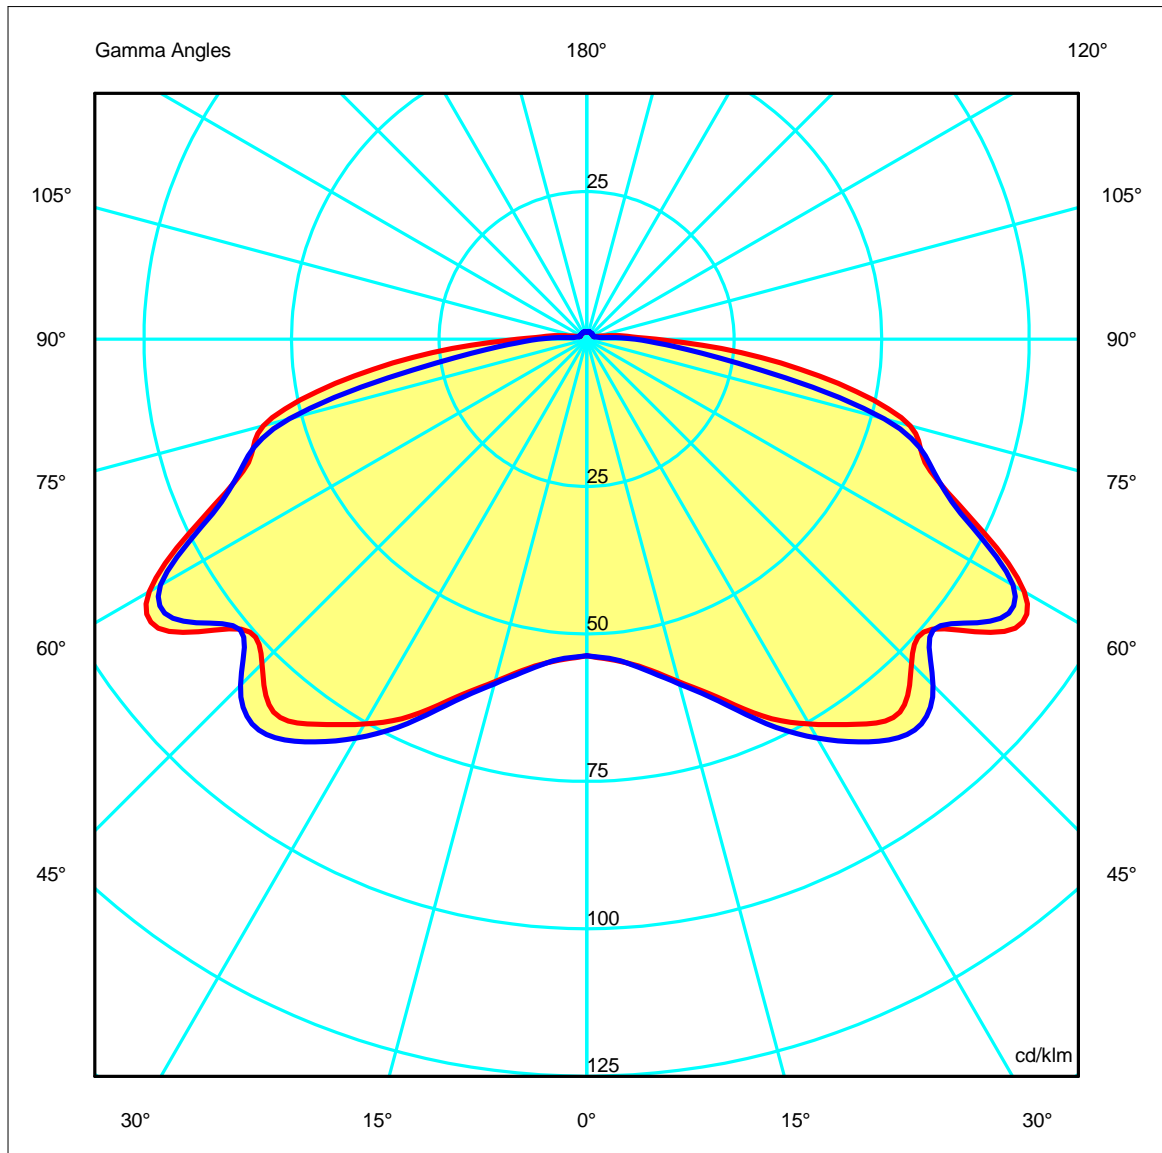

Luminaire

 Code DE-0265-CEM
 Name Colgante KING 60W AI E27

Measur.


 Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	5.53	11.06	16.60	22.13	27.66	OC	4.32	8.63	12.95	17.27	21.59
OB	5.53	11.06	16.60	22.13	27.66	OD	4.32	8.63	12.95	17.27	21.59

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	28.30	28.80	31.69	37.16	42.02	41.00	45.54	37.88	29.92	13.83
OB	28.30	28.80	31.69	37.16	42.02	41.00	45.54	37.88	29.92	13.83
OC	28.30	28.73	31.88	37.89	43.91	43.74	43.95	36.88	27.50	7.99
OD	28.30	28.73	31.88	37.89	43.91	43.74	43.95	36.88	27.50	7.99

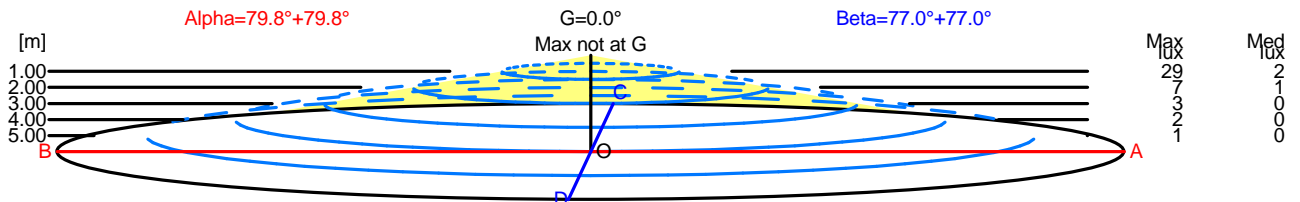

H[m]	D[m]	Max lux	Med lux	Alpha=79.8°+79.8°	G=0.0 Max not at G
1.00	11.06	29	2		
2.00	22.13	7	1		
3.00	33.19	3	0		
4.00	44.26	2	0		
5.00	55.32	1	0		

H[m]	D[m]	Max lux	Med lux	Beta=77.0°+77.0°	G=0.0 Max not at G
1.00	8.63	29	2		
2.00	17.27	7	1		
3.00	25.90	3	0		
4.00	34.54	2	0		
5.00	43.17	1	0		



Luminaire

Code DE-0265-CEM
Name Colgante KING 60W AI E27

Measurement

Code CL116A17FF042G
Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	19.5	21.1	19.9	21.4	21.8	19.5	21.1	19.9	21.4	21.8
x=2H y=3H	21.8	23.2	22.1	23.5	23.9	21.8	23.2	22.2	23.6	23.9
x=2H y=4H	23.0	24.3	23.4	24.7	24.9	22.9	24.2	23.2	24.5	24.9
x=2H y=6H	24.0	25.2	24.4	25.6	25.5	23.5	24.7	23.9	25.1	25.5
x=2H y=8H	24.3	25.5	24.7	25.9	25.7	23.6	24.8	24.0	25.2	25.7
x=2H y=12H	24.5	25.7	25.0	26.1	25.7	23.7	24.9	24.2	25.3	25.7
x=4H y=2H	20.6	21.9	21.0	22.3	22.7	20.6	21.9	21.0	22.3	22.7
x=4H y=3H	23.0	24.2	23.4	24.6	25.0	23.0	24.2	23.5	24.6	25.0
x=4H y=4H	24.3	25.4	24.8	25.8	26.2	24.2	25.3	24.7	25.7	26.2
x=4H y=6H	25.5	26.4	25.9	26.8	26.8	25.0	25.9	25.5	26.4	26.8
x=4H y=8H	25.9	26.7	26.3	27.2	27.0	25.2	26.0	25.7	26.5	27.0
x=4H y=12H	26.1	26.9	26.7	27.4	27.1	25.3	26.1	25.8	26.6	27.1
x=8H y=4H	24.9	25.8	25.4	26.3	26.7	24.8	25.7	25.3	26.2	26.7
x=8H y=6H	26.2	26.9	26.7	27.4	27.5	25.7	26.5	26.3	27.0	27.5
x=8H y=8H	26.7	27.3	27.2	27.8	27.7	26.0	26.7	26.6	27.2	27.7
x=8H y=12H	27.0	27.6	27.6	28.1	27.9	26.2	26.8	26.7	27.3	27.9
x=12H y=4H	25.0	25.8	25.5	26.3	26.7	24.9	25.7	25.4	26.2	26.7
x=12H y=6H	26.3	27.0	26.8	27.5	27.6	25.9	26.5	26.4	27.0	27.6
x=12H y=8H	26.8	27.4	27.3	27.9	27.9	26.2	26.8	26.7	27.3	27.9

Luminaire


Code DE-0265-CEM
 Name Colgante KING 60W AI E27

Measur.

Code CL116A17FF042G
 Name Colgante KING 60W AI E27


Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Diam=187mm



C Halfplanes

180.0 ———— 0.0
 270.0 ———— 90.0

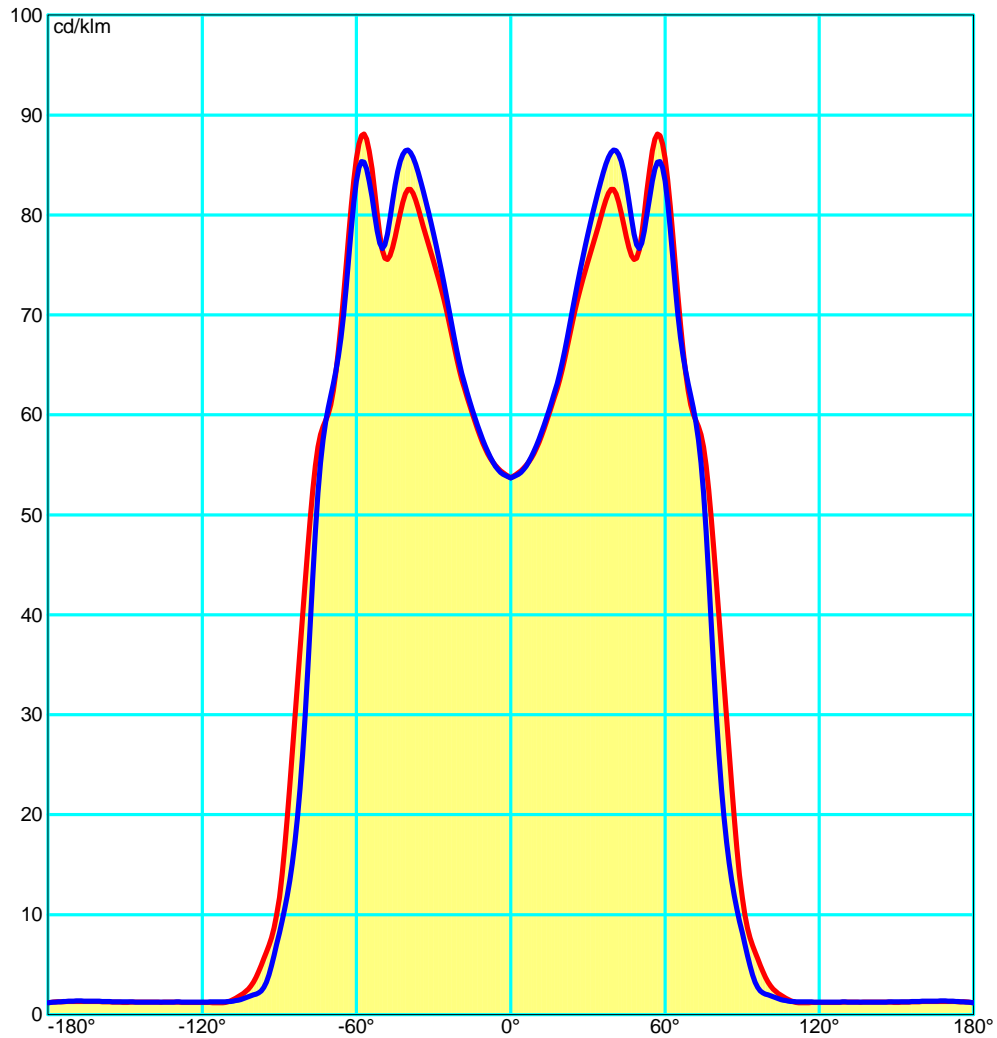

Luminaire


Code DE-0265-CEM
 Name Colgante KING 60W AI E27

Measur.

Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Luminance

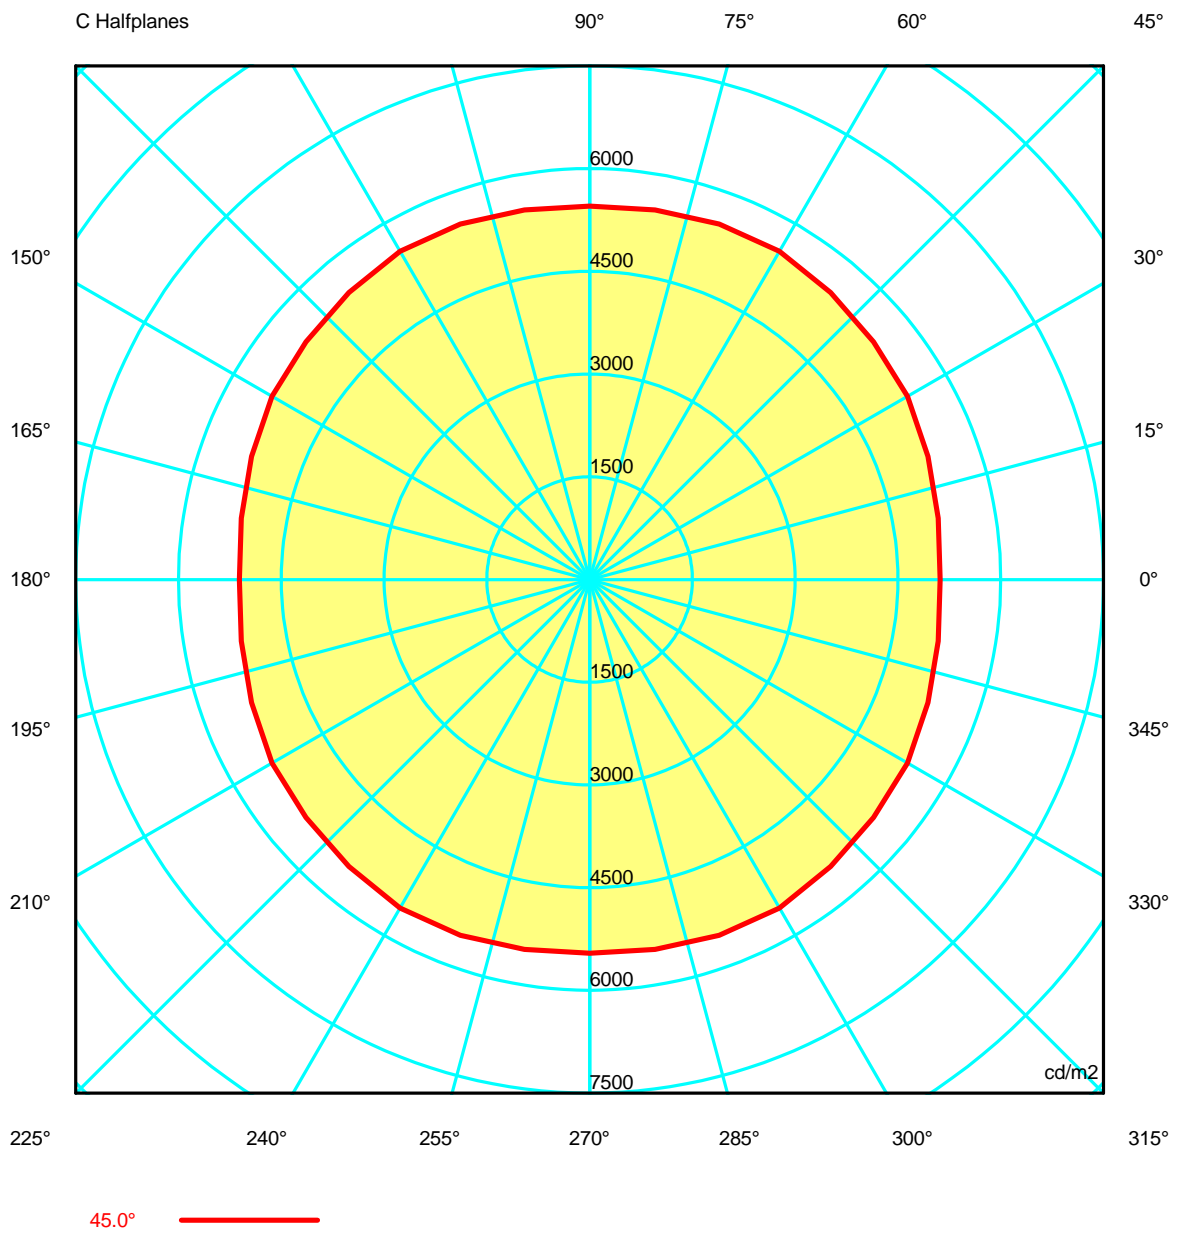



Luminaire

Code DE-0265-CEM
 Name Colgante KING 60W AI E27

Measurment

Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Luminance cd/m2 Table 1/3

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29
G 5.0	2943.34	2934.32	2929.79	2930.42	2931.94	2931.34	2927.96	2928.95	2932.46	2936.30	2932.46	2928.95	2927.96
G 10.0	3039.58	3037.34	3030.63	3021.37	3027.12	3035.72	3039.46	3042.15	3047.16	3054.79	3047.16	3042.15	3039.46
G 15.0	3241.04	3234.54	3222.25	3212.90	3222.14	3236.56	3247.50	3256.98	3260.13	3260.32	3260.13	3256.98	3247.50
G 20.0	3521.28	3518.89	3516.20	3517.85	3528.80	3536.59	3543.19	3560.85	3568.50	3559.52	3568.50	3560.85	3543.19
G 25.0	3922.14	3929.38	3934.60	3937.87	3941.62	3949.14	3962.26	3979.36	3992.34	3999.34	3992.34	3979.36	3962.26
G 30.0	4309.59	4357.35	4385.36	4401.72	4431.10	4455.18	4463.61	4464.31	4465.13	4467.19	4465.13	4464.31	4463.61
G 35.0	4730.74	4768.19	4822.40	4886.64	4935.73	4963.24	4967.26	4951.15	4940.43	4943.75	4940.43	4951.15	4967.26
G 40.0	5128.18	5179.66	5251.03	5330.82	5385.43	5416.41	5423.59	5403.58	5382.61	5372.31	5382.61	5403.58	5423.59
G 45.0	5112.12	5165.49	5254.89	5353.54	5404.03	5470.26	5539.00	5524.76	5483.20	5454.33	5483.20	5524.76	5539.00
G 50.0	5377.19	5463.49	5487.39	5472.05	5505.56	5595.28	5680.51	5672.93	5562.82	5387.73	5562.82	5672.93	5680.51
G 55.0	6585.89	6711.27	6835.53	6865.21	6726.27	6764.84	6920.73	6778.05	6538.75	6356.51	6538.75	6778.05	6920.73
G 60.0	7184.16	7331.70	7486.57	7526.98	7345.87	7378.83	7589.35	7492.98	7243.11	6998.02	7243.11	7492.98	7589.35
G 65.0	6765.49	7001.85	7148.88	7146.15	7084.20	7161.54	7402.90	7291.82	6962.99	6586.74	6962.99	7291.82	7402.90
G 70.0	6595.93	6920.23	7142.54	7164.64	6998.77	7059.02	7289.77	7216.70	6965.85	6691.08	6965.85	7216.70	7289.77
G 75.0	7274.00	7782.27	8048.90	8000.73	7796.62	7830.04	7938.58	7573.61	7077.75	6686.59	7077.75	7573.61	7938.58
G 80.0	6863.35	6938.13	6950.94	6800.62	6446.74	6224.64	6057.57	5551.59	5054.08	4742.98	5054.08	5551.59	6057.57
G 85.0	5527.63	5135.41	4958.76	4922.33	4718.75	4274.21	3815.82	3655.20	3497.78	3191.83	3497.78	3655.20	3815.82
G 90.0	3704.05	3556.07	3545.66	3584.70	3446.38	3237.19	3036.87	2831.78	2681.77	2595.24	2681.77	2831.78	3036.87



Luminaire

Code DE-0265-CEM
Name Colgante KING 60W AI E27

Measurment

Code CL116A17FF042G
Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29
G 5.0	2931.34	2931.94	2930.42	2929.79	2934.32	2943.34	2934.32	2929.79	2930.42	2931.94	2931.34	2927.96	2928.95
G 10.0	3035.72	3027.12	3021.37	3030.63	3037.34	3039.58	3037.34	3030.63	3021.37	3027.12	3035.72	3039.46	3042.15
G 15.0	3236.56	3222.14	3212.90	3222.25	3234.54	3241.04	3234.54	3222.25	3212.90	3222.14	3236.56	3247.50	3256.98
G 20.0	3536.59	3528.80	3517.85	3516.20	3518.89	3521.28	3518.89	3516.20	3517.85	3528.80	3536.59	3543.19	3560.85
G 25.0	3949.14	3941.62	3937.87	3934.60	3929.38	3922.14	3929.38	3934.60	3937.87	3941.62	3949.14	3962.26	3979.36
G 30.0	4455.18	4431.10	4401.72	4385.36	4357.35	4309.59	4357.35	4385.36	4401.72	4431.10	4455.18	4463.61	4464.31
G 35.0	4963.24	4935.73	4886.64	4822.40	4768.19	4730.74	4768.19	4822.40	4886.64	4935.73	4963.24	4967.26	4951.15
G 40.0	5416.41	5385.43	5330.82	5251.03	5179.66	5128.18	5179.66	5251.03	5330.82	5385.43	5416.41	5423.59	5403.58
G 45.0	5470.26	5404.03	5353.54	5254.89	5165.49	5112.12	5165.49	5254.89	5353.54	5404.03	5470.26	5539.00	5524.76
G 50.0	5595.28	5505.56	5472.05	5487.39	5463.49	5377.19	5463.49	5487.39	5472.05	5505.56	5595.28	5680.51	5672.93
G 55.0	6764.84	6726.27	6865.21	6835.53	6711.27	6585.89	6711.27	6835.53	6865.21	6726.27	6764.84	6920.73	6778.05
G 60.0	7378.83	7345.87	7526.98	7486.57	7331.70	7184.16	7331.70	7486.57	7526.98	7345.87	7378.83	7589.35	7492.98
G 65.0	7161.54	7084.20	7146.15	7148.88	7001.85	6765.49	7001.85	7148.88	7146.15	7084.20	7161.54	7402.90	7291.82
G 70.0	7059.02	6998.77	7164.64	7142.54	6920.23	6595.93	6920.23	7142.54	7164.64	6998.77	7059.02	7289.77	7216.70
G 75.0	7830.04	7796.62	8000.73	8048.90	7782.27	7274.00	7782.27	8048.90	8000.73	7796.62	7830.04	7938.58	7573.61
G 80.0	6224.64	6446.74	6800.62	6950.94	6938.13	6863.35	6938.13	6950.94	6800.62	6446.74	6224.64	6057.57	5551.59
G 85.0	4274.21	4718.75	4922.33	4958.76	5135.41	5527.63	5135.41	4958.76	4922.33	4718.75	4274.21	3815.82	3655.20
G 90.0	3237.19	3446.38	3584.70	3545.66	3556.07	3704.05	3556.07	3545.66	3584.70	3446.38	3237.19	3036.87	2831.78

Luminaire

Code DE-0265-CEM
Name Colgante KING 60W AI E27

Measur.

Code CL116A17FF042G
Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Luminance cd/m2 Table 3/3


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29	2924.29
G 5.0	2932.46	2936.30	2932.46	2928.95	2927.96	2931.34	2931.94	2930.42	2929.79	2934.32
G 10.0	3047.16	3054.79	3047.16	3042.15	3039.46	3035.72	3027.12	3021.37	3030.63	3037.34
G 15.0	3260.13	3260.32	3260.13	3256.98	3247.50	3236.56	3222.14	3212.90	3222.25	3234.54
G 20.0	3568.50	3559.52	3568.50	3560.85	3543.19	3536.59	3528.80	3517.85	3516.20	3518.89
G 25.0	3992.34	3999.34	3992.34	3979.36	3962.26	3949.14	3941.62	3937.87	3934.60	3929.38
G 30.0	4465.13	4467.19	4465.13	4464.31	4463.61	4455.18	4431.10	4401.72	4385.36	4357.35
G 35.0	4940.43	4943.75	4940.43	4951.15	4967.26	4963.24	4935.73	4886.64	4822.40	4768.19
G 40.0	5382.61	5372.31	5382.61	5403.58	5423.59	5416.41	5385.43	5330.82	5251.03	5179.66
G 45.0	5483.20	5454.33	5483.20	5524.76	5539.00	5470.26	5404.03	5353.54	5254.89	5165.49
G 50.0	5562.82	5387.73	5562.82	5672.93	5680.51	5595.28	5505.56	5472.05	5487.39	5463.49
G 55.0	6538.75	6356.51	6538.75	6778.05	6920.73	6764.84	6726.27	6865.21	6835.53	6711.27
G 60.0	7243.11	6998.02	7243.11	7492.98	7589.35	7378.83	7345.87	7526.98	7486.57	7331.70
G 65.0	6962.99	6586.74	6962.99	7291.82	7402.90	7161.54	7084.20	7146.15	7148.88	7001.85
G 70.0	6965.85	6691.08	6965.85	7216.70	7289.77	7059.02	6998.77	7164.64	7142.54	6920.23
G 75.0	7077.75	6686.59	7077.75	7573.61	7938.58	7830.04	7796.62	8000.73	8048.90	7782.27
G 80.0	5054.08	4742.98	5054.08	5551.59	6057.57	6224.64	6446.74	6800.62	6950.94	6938.13
G 85.0	3497.78	3191.83	3497.78	3655.20	3815.82	4274.21	4718.75	4922.33	4958.76	5135.41
G 90.0	2681.77	2595.24	2681.77	2831.78	3036.87	3237.19	3446.38	3584.70	3545.66	3556.07

Luminaire
 Code DE-0265-CEM
 Name Colgante KING 60W AI E27
Measur.
 Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 7.1 Tight Tilting Angle:0°

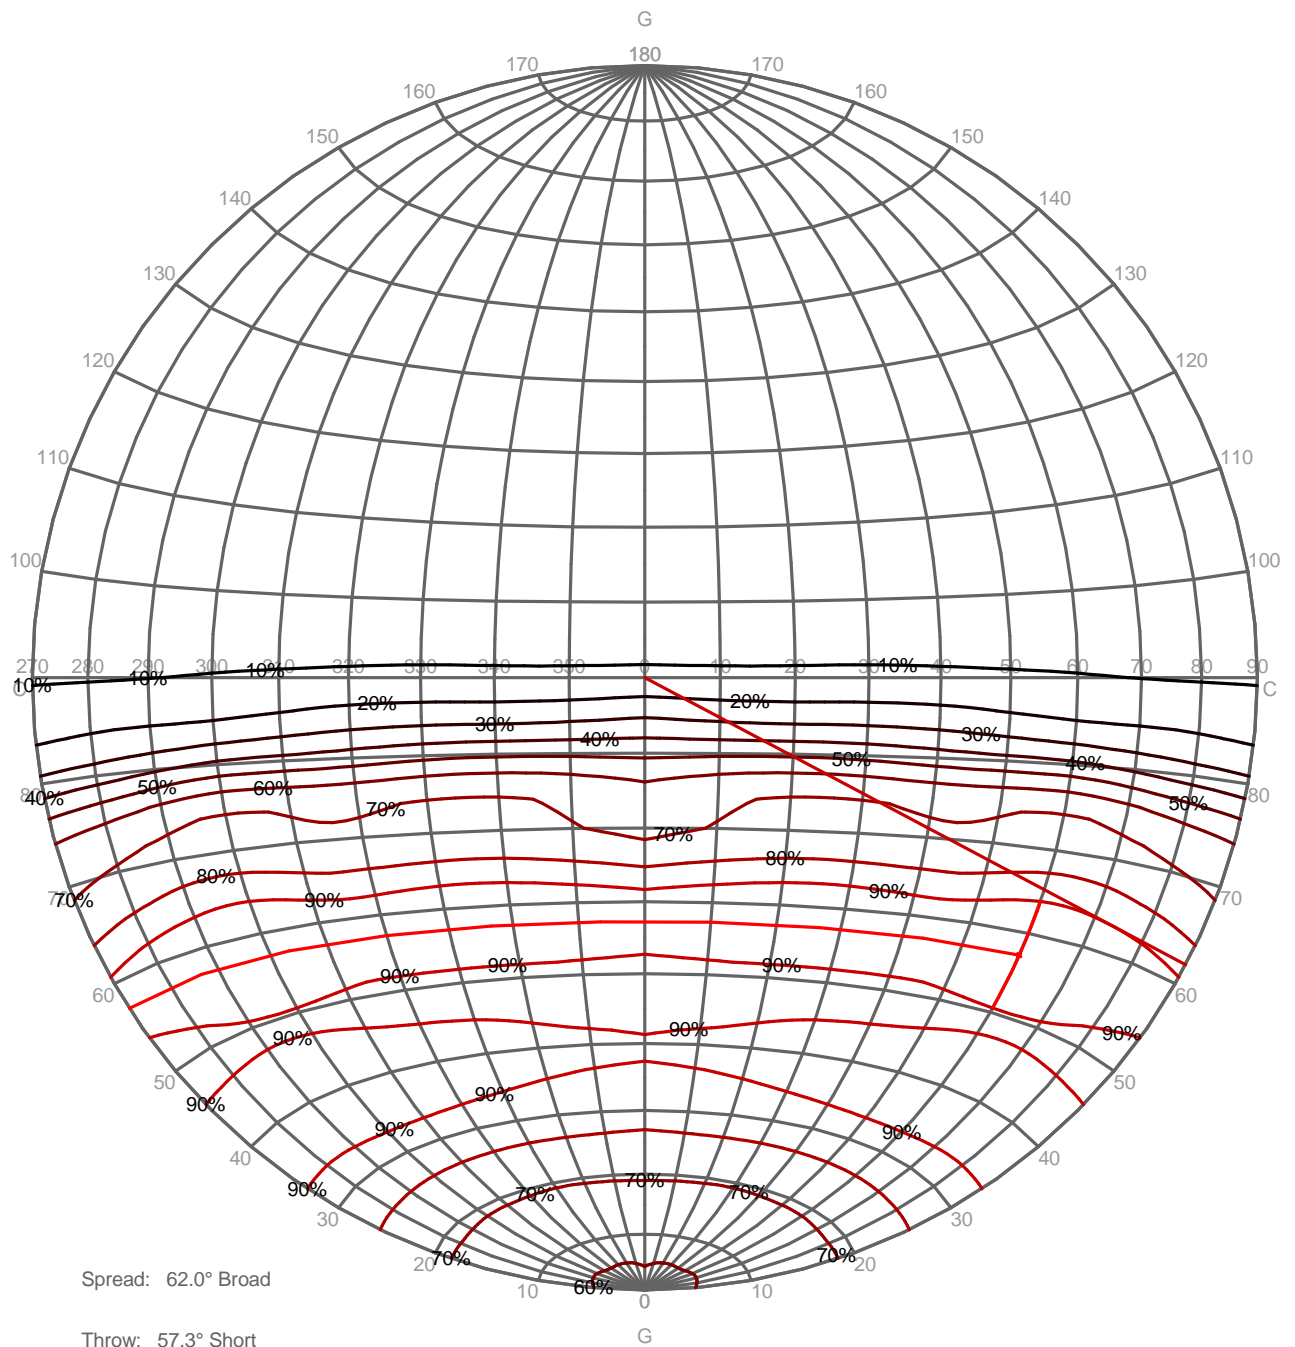

Luminaire

Code DE-0265-CEM
 Name Colgante KING 60W AI E27


Measur.

Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

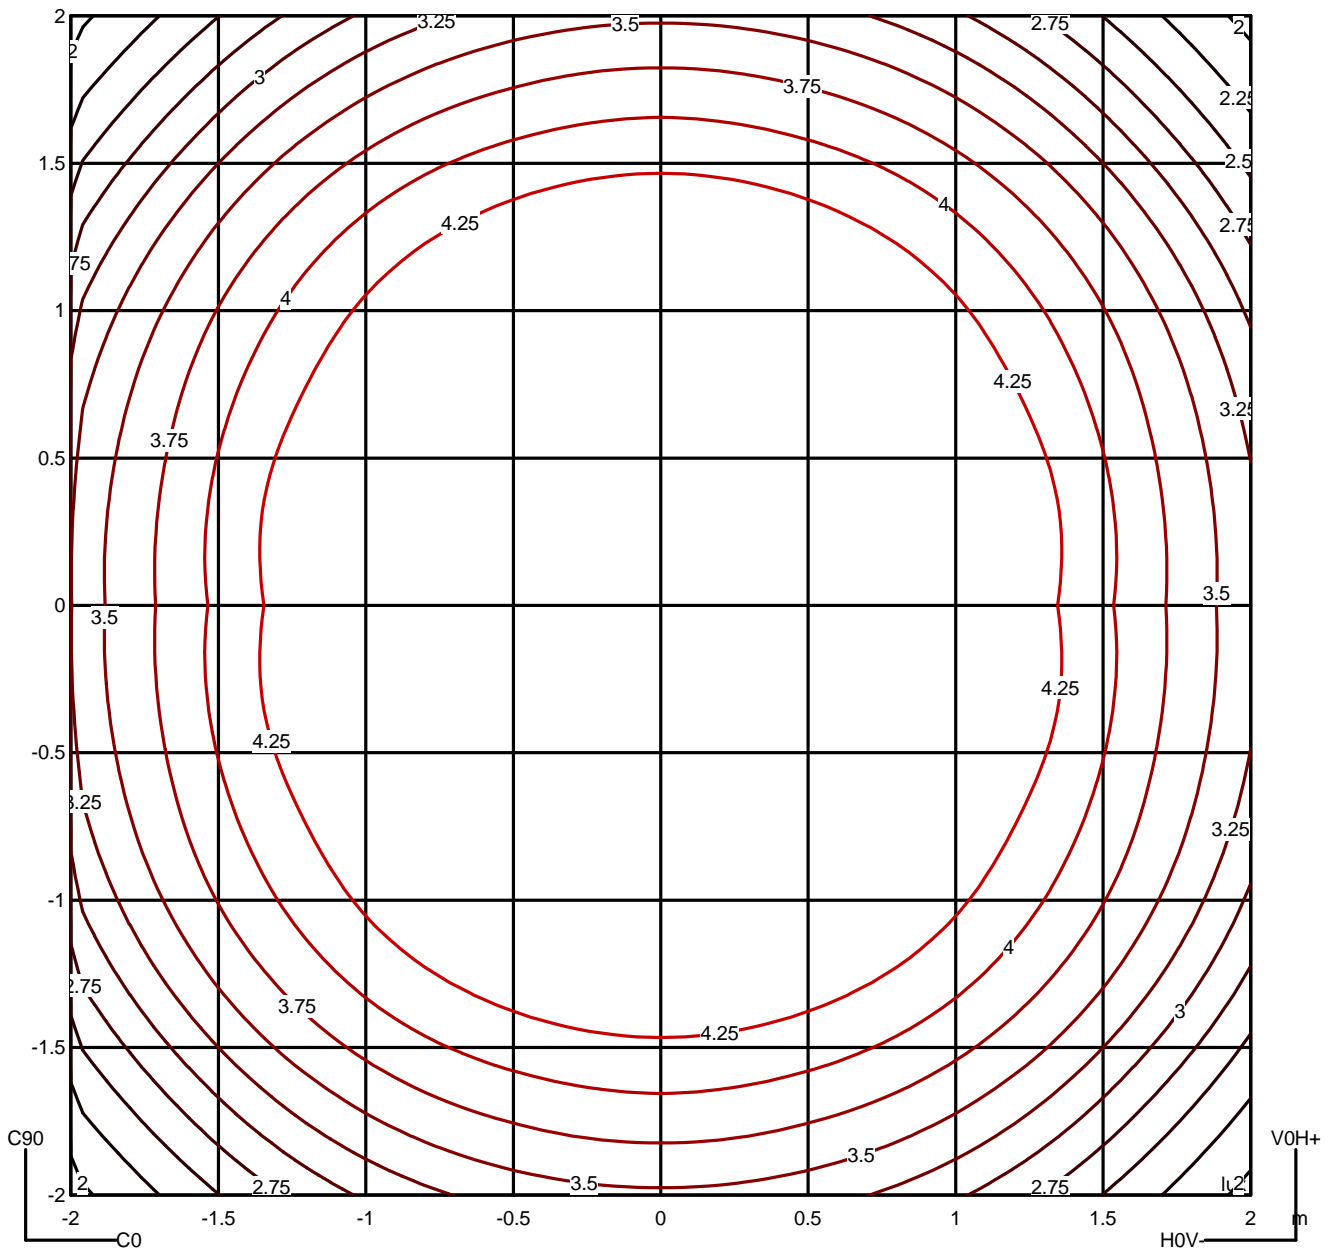

Luminaire

Code DE-0265-CEM
 Name Colgante KING 60W AI E27


Measur.



Code CL116A17FF042G
 Name Colgante KING 60W AI E27

Luminaire Flux	221.57 lm	Luminaire Power	42.00 W	Efficacy	5.28 lm/W	Efficiency	42.04%
Lamps Flux	527.00 lm	Maximum value	90.80 cd/klm	Position	C=60.00 G=55.00	CG	Double Symmetrical

		Average Luminance [cd/m ²]									
		45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	5112	5377	6586	7184	6765	6596	7274	6863	5528	---	
90.0°	5454	5388	6357	6998	6587	6691	6687	4743	3192	---	

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300				1.15	
B	1		2000	1500	1000	750	500	<300			1.5	
C					2000		1000	500	<300		1.85	
D	2						2000	1000	500	<300	2.2	
E	3							2000	1000	500	<300	2.55

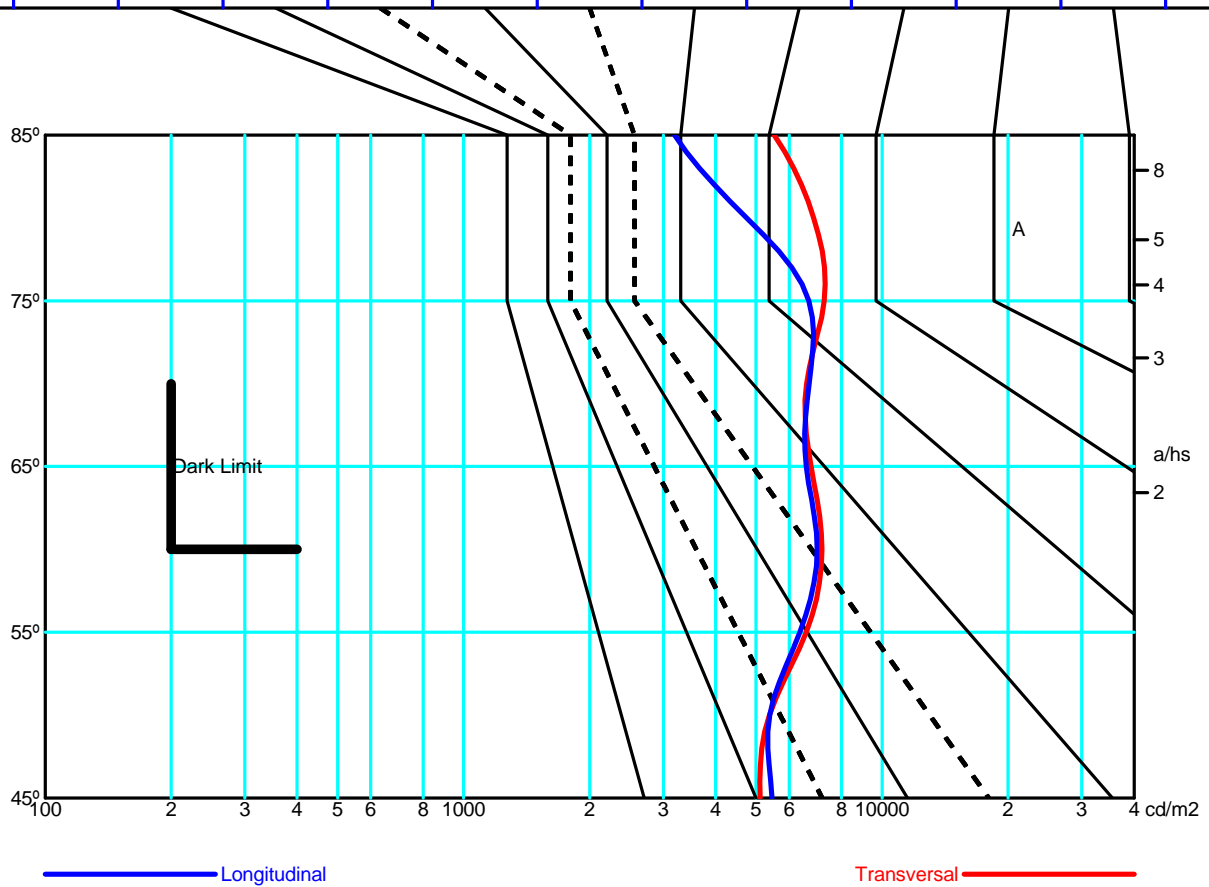

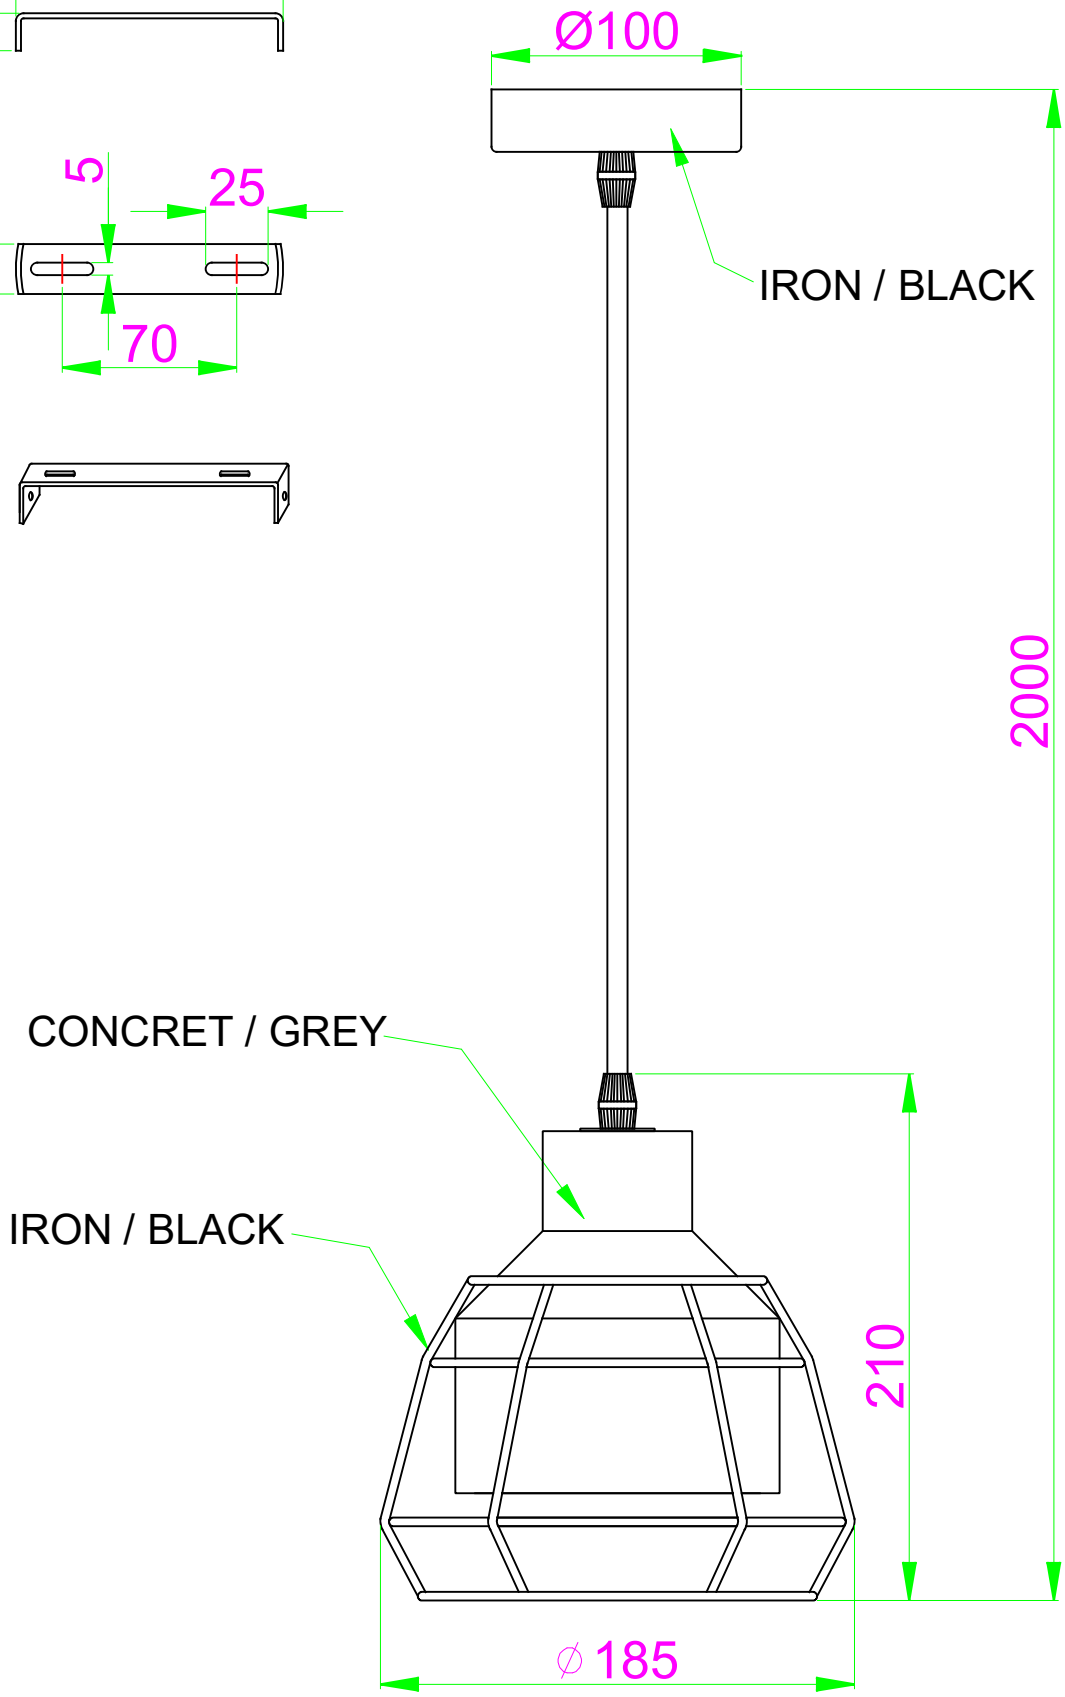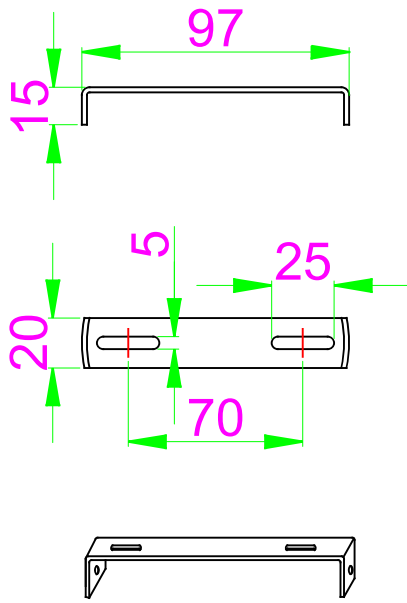



King
DE-0265

FOR
LIGHT

