
Instrucciones de montaje
Datos Fotométricos

Crobat

DE-0268-NEG

Luz de lectura Crobat LED 3.8W 3000K ON-OFF Negro 311lm





CARACTERÍSTICAS TÉCNICAS

IP20

Potencia total luminaria : 4.3W

Lúmenes reales : 311

Lúmenes nominales : 450

Lm / W reales : 72

Ángulo Ópticas / Reflector : FLOOD 92º

Material de la estructura : Policarbonato, Acero

Acabado estructura : Negro

Material del difusor : Policarbonato

Acabado difusor : Opal

Voltaje / Frecuencia : 100-240V ~ 50/60Hz

Protocolo de regulación : ON-OFF

Power Factor : 0.50

Vida útil : 36.000h L70B30

Garantía : 5 Años


CARACTERÍSTICAS LUMINOTÉCNICAS


CRI: 80

MacAdam steps: 3

Riesgo fotobiológico: RG0

Portalámparas	Cantidad	Potencia fuente de luz (W)	Temperatura de color correlacionada (CCT)
LED	1	3.8W	3000K





LOGÍSTICA

Peso neto (Kg): 0.35

Peso embalado (Kg): 0.46

Embalaje: 160mm x 70mm x 180mm

12 Un

APLICACIÓN DE LA LUMINARIA



La imagen puede no coincidir con la referencia, LEDS C4 se reserva el derecho de modificación de alguno de los componentes que componen el producto. Los datos relativos al flujo, la potencia y la Temperatura de Color están sujetos a una tolerancia de +- 10%.

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led


Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical


Round Luminaire	Diam. 45 mm	Height	95 mm
Round Luminous Area	Diam. 40 mm	Height	0 mm
Horizontal Luminous Area	0.001257 m2	Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.000304 m2
Coordinate system	CG	Symmetry Type	Asymmetrical
Date	28-07-2017	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	311.43 lm
Operator	Asselum T3	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	LED	LED	311.43	4.10	1

C.I.E.	0 0 0 0 100	D DIN 5040	--
F UTE	1.00 T	B NBN	BZ 10

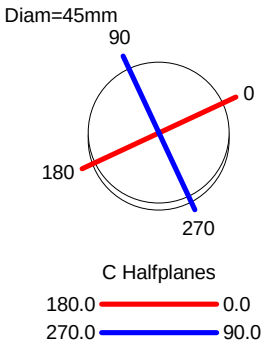

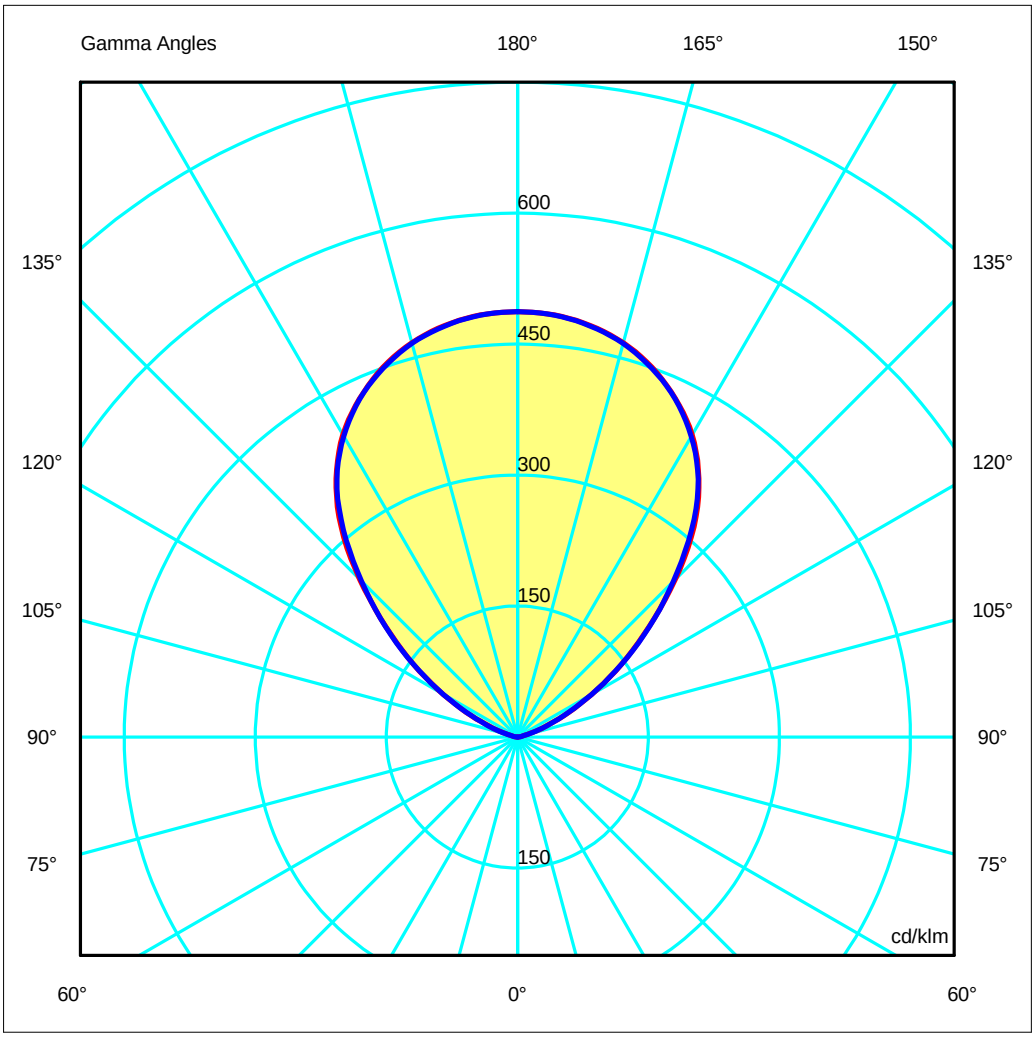

ULOR100.00 %
DLOR 0.00 %
RN100.00 %

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Luminous Intensity Table cd/klm **Table 1/1**


	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00	C 105.00	C 120.00	C 135.00	C 150.00	C 165.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01
G 95.0	0.11	0.11	0.11	0.11	0.11	0.12	0.11	0.12	0.11	0.11	0.11	0.11
G100.0	2.10	2.05	1.99	2.10	2.02	2.13	1.86	2.13	2.02	2.10	1.99	2.05
G105.0	11.42	11.36	11.29	11.29	11.30	11.45	11.45	11.45	11.30	11.29	11.29	11.36
G110.0	29.66	29.37	29.73	29.64	29.50	30.43	30.34	30.43	29.50	29.64	29.73	29.37
G115.0	58.69	58.22	57.67	58.66	58.69	58.55	58.29	58.55	58.69	58.66	57.67	58.22
G120.0	98.00	97.45	96.97	97.87	97.89	98.68	97.88	98.68	97.89	97.87	96.97	97.45
G125.0	145.31	145.10	144.21	145.05	144.54	145.53	144.90	145.53	144.54	145.05	144.21	145.10
G130.0	196.50	197.67	196.93	196.53	195.08	197.37	197.48	197.37	195.08	196.53	196.93	197.67
G135.0	255.41	254.39	252.97	253.61	253.44	255.02	252.23	255.02	253.44	253.61	252.97	254.39
G140.0	314.36	313.24	310.72	312.39	312.03	311.60	310.00	311.60	312.03	312.39	310.72	313.24
G145.0	361.97	361.61	360.96	360.60	361.14	362.06	360.52	362.06	361.14	360.60	360.96	361.61
G150.0	399.82	399.75	397.84	398.97	398.31	398.46	397.60	398.46	398.31	398.97	397.84	399.75
G155.0	427.85	427.79	427.03	426.96	426.51	427.62	427.32	427.62	426.51	426.96	427.03	427.79
G160.0	450.76	450.81	449.67	450.15	449.49	450.14	449.49	450.14	449.49	450.15	449.67	450.81
G165.0	467.55	467.42	466.80	466.83	466.50	466.90	466.88	466.90	466.50	466.83	466.80	467.42
G170.0	478.82	478.77	478.37	478.33	478.10	478.38	478.30	478.38	478.10	478.33	478.37	478.77
G175.0	485.41	485.22	484.77	485.08	484.97	484.92	485.17	484.92	484.97	485.08	484.77	485.22
G180.0	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28

	C 180.00	C 195.00	C 210.00	C 225.00	C 240.00	C 255.00	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01
G 95.0	0.11	0.11	0.11	0.11	0.11	0.12	0.11	0.12	0.11	0.11	0.11	0.11
G100.0	2.10	2.05	1.99	2.10	2.02	2.13	1.86	2.13	2.02	2.10	1.99	2.05
G105.0	11.42	11.36	11.29	11.29	11.30	11.45	11.45	11.45	11.30	11.29	11.29	11.36
G110.0	29.66	29.37	29.73	29.64	29.50	30.43	30.34	30.43	29.50	29.64	29.73	29.37
G115.0	58.69	58.22	57.67	58.66	58.69	58.55	58.29	58.55	58.69	58.66	57.67	58.22
G120.0	98.00	97.45	96.97	97.87	97.89	98.68	97.88	98.68	97.89	97.87	96.97	97.45
G125.0	145.31	145.10	144.21	145.05	144.54	145.53	144.90	145.53	144.54	145.05	144.21	145.10
G130.0	196.50	197.67	196.93	196.53	195.08	197.37	197.48	197.37	195.08	196.53	196.93	197.67
G135.0	255.41	254.39	252.97	253.61	253.44	255.02	252.23	255.02	253.44	253.61	252.97	254.39
G140.0	314.36	313.24	310.72	312.39	312.03	311.60	310.00	311.60	312.03	312.39	310.72	313.24
G145.0	361.97	361.61	360.96	360.60	361.14	362.06	360.52	362.06	361.14	360.60	360.96	361.61
G150.0	399.82	399.75	397.84	398.97	398.31	398.46	397.60	398.46	398.31	398.97	397.84	399.75
G155.0	427.85	427.79	427.03	426.96	426.51	427.62	427.32	427.62	426.51	426.96	427.03	427.79
G160.0	450.76	450.81	449.67	450.15	449.49	450.14	449.49	450.14	449.49	450.15	449.67	450.81
G165.0	467.55	467.42	466.80	466.83	466.50	466.90	466.88	466.90	466.50	466.83	466.80	467.42
G170.0	478.82	478.77	478.37	478.33	478.10	478.38	478.30	478.38	478.10	478.33	478.37	478.77
G175.0	485.41	485.22	484.77	485.08	484.97	484.92	485.17	484.92	484.97	485.08	484.77	485.22
G180.0	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28	487.28

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led


Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Diam=45mm



C Halfplanes



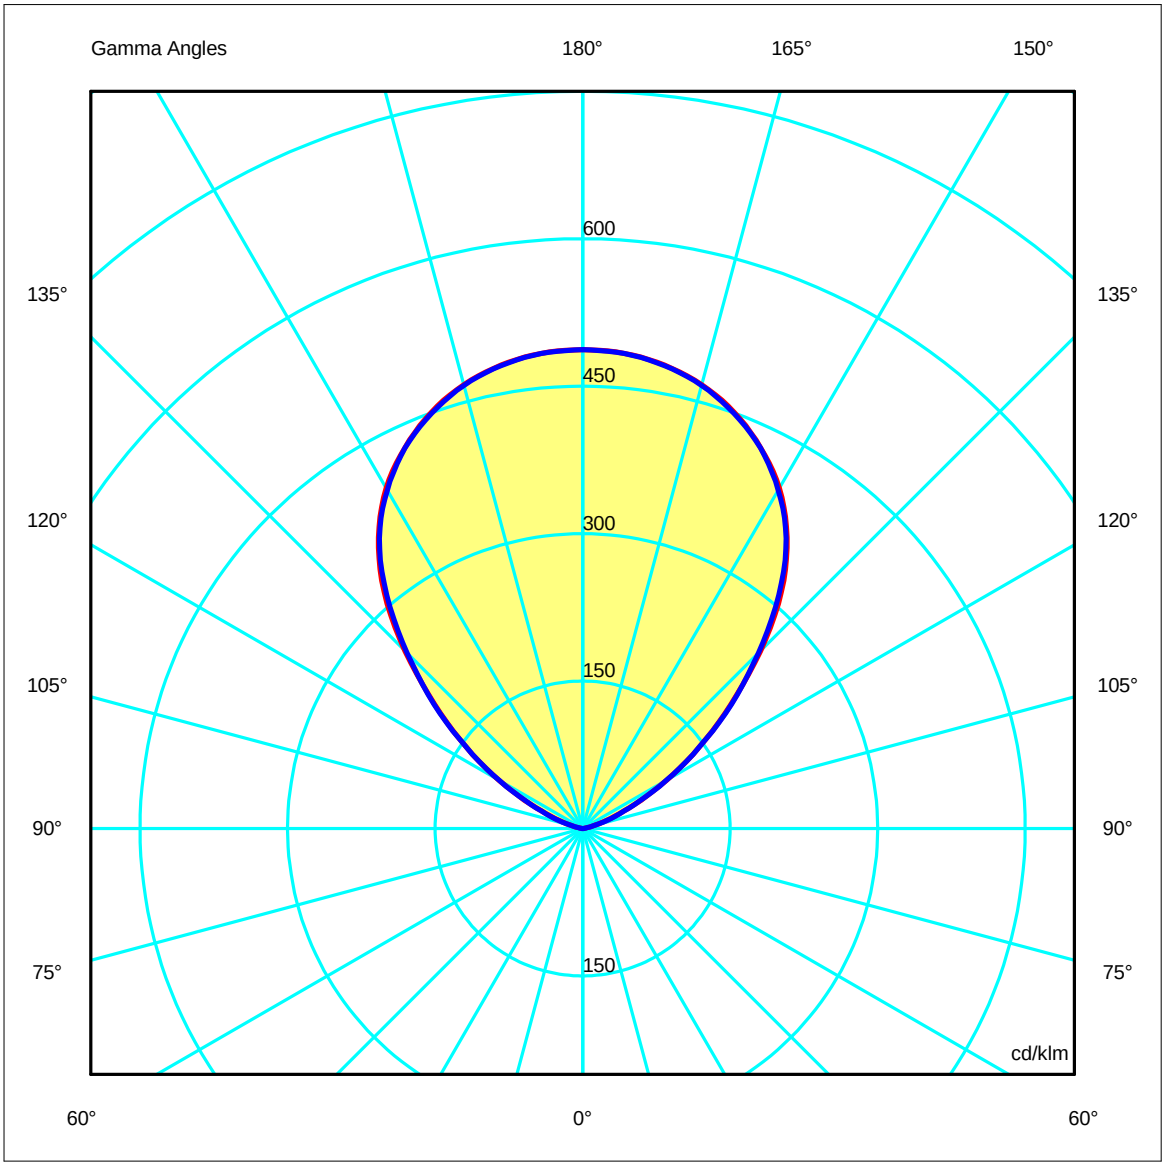

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led


Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.03	2.07	3.10	4.14	5.17	OC	1.03	2.05	3.08	4.11	5.13
OB	1.03	2.07	3.10	4.14	5.17	OD	1.03	2.05	3.08	4.11	5.13

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	151.75	151.17	145.61	133.25	112.73	79.54	45.25	18.28	3.56	0.04
OB	151.75	151.17	145.61	133.25	112.73	79.54	45.25	18.28	3.56	0.04
OC	151.75	151.10	145.40	133.08	112.28	78.55	45.13	18.15	3.57	0.04
OD	151.75	151.10	145.40	133.08	112.28	78.55	45.13	18.15	3.57	0.04

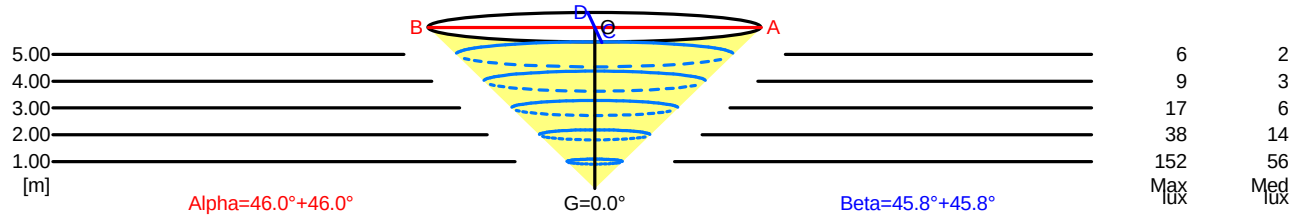

5.00	10.34	6	2	
4.00	8.27	9	3	
3.00	6.21	17	6	
2.00	4.14	38	14	
1.00	2.07	152	56	
H[m]	D[m]	Max lux	Med lux	Alpha=46.0°+46.0° G=0.0

5.00	10.27	6	2	
4.00	8.22	9	3	
3.00	6.16	17	6	
2.00	4.11	38	14	
1.00	2.05	152	56	
H[m]	D[m]	Max lux	Med lux	Beta=45.8°+45.8° G=0.0

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical


UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=3H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=2H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=3H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led


Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Diam=45mm



C Halfplanes


180.0 0.0
270.0 90.0

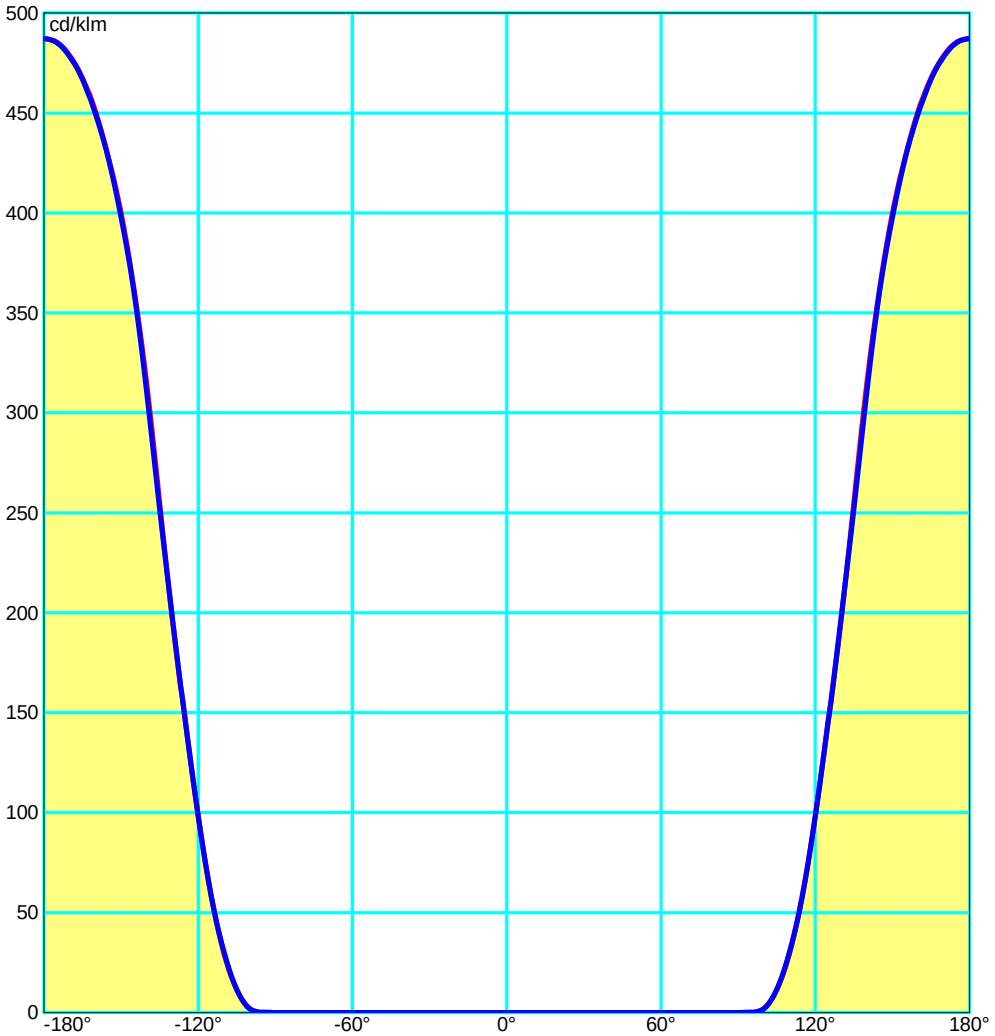

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Luminance

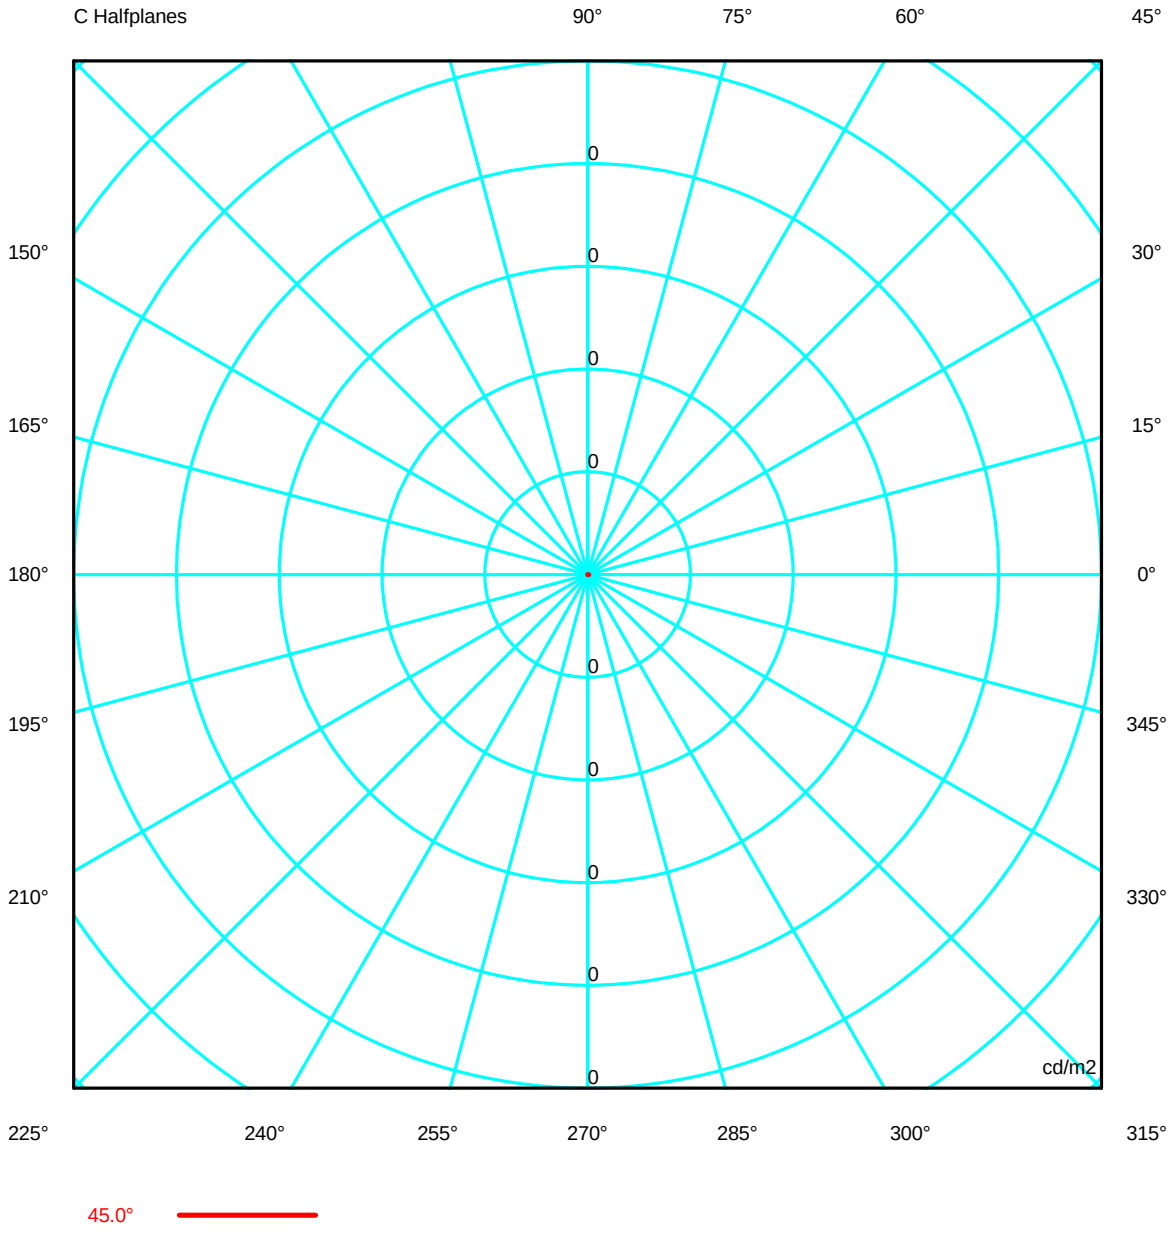

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency 100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG Asymmetrical

Luminance cd/m2 **Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area Tilting Angle:0°

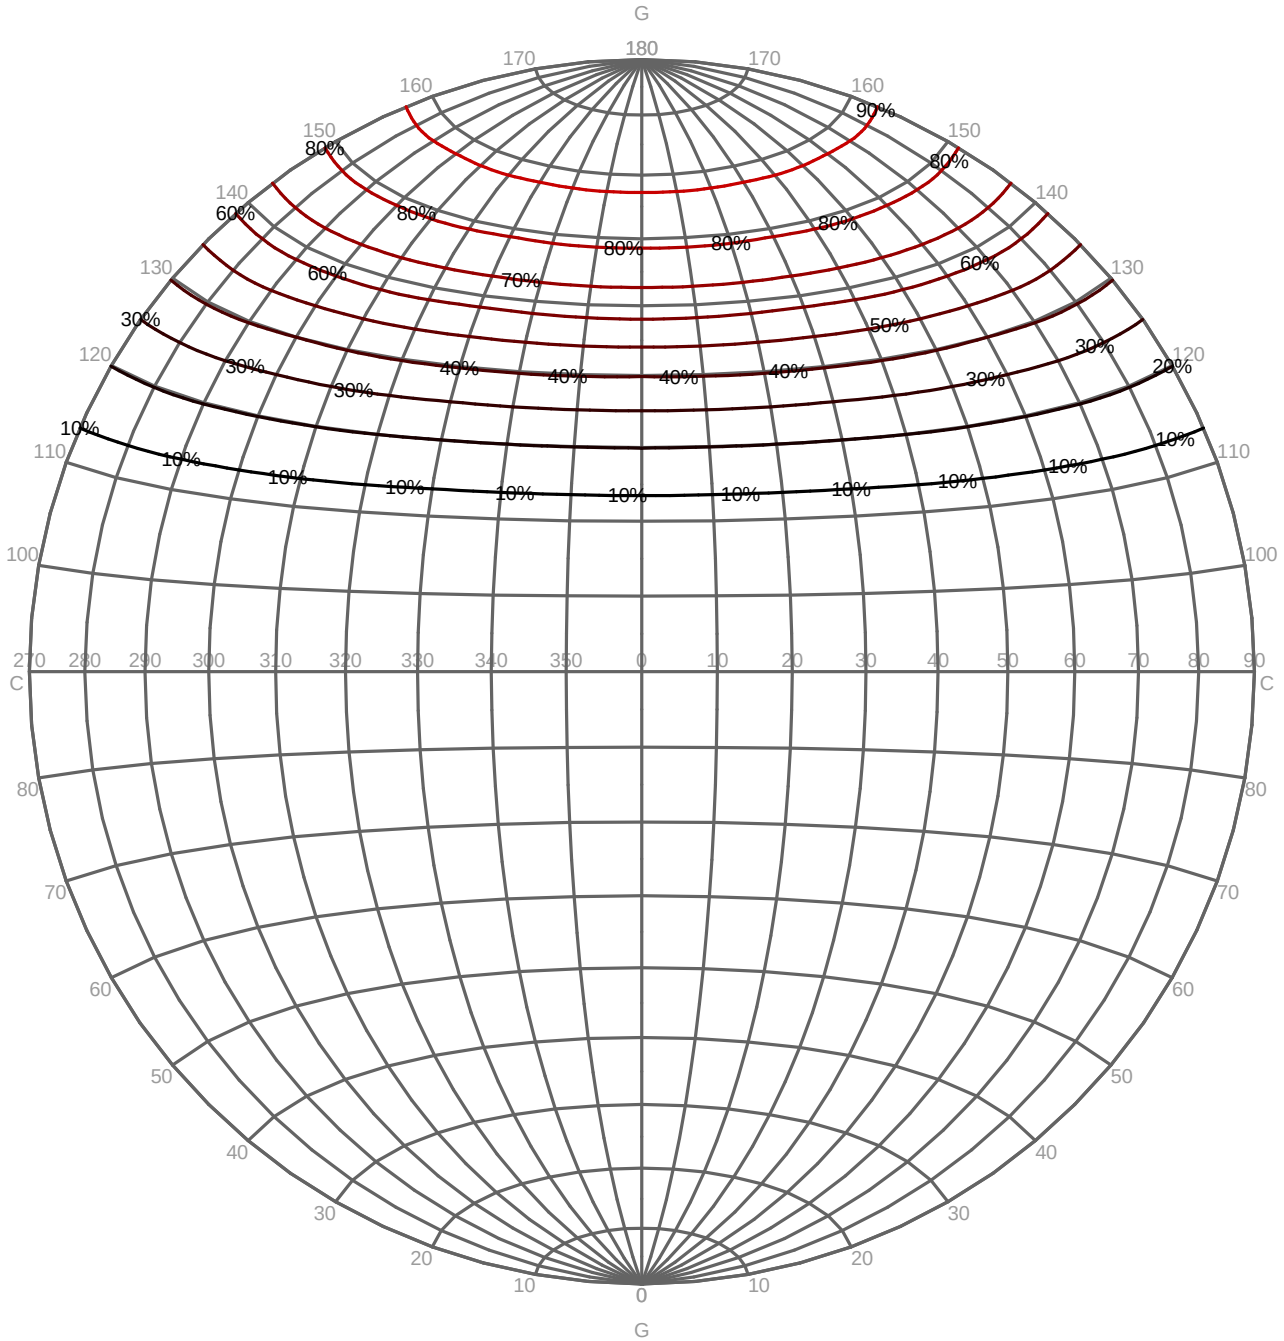


Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led

Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

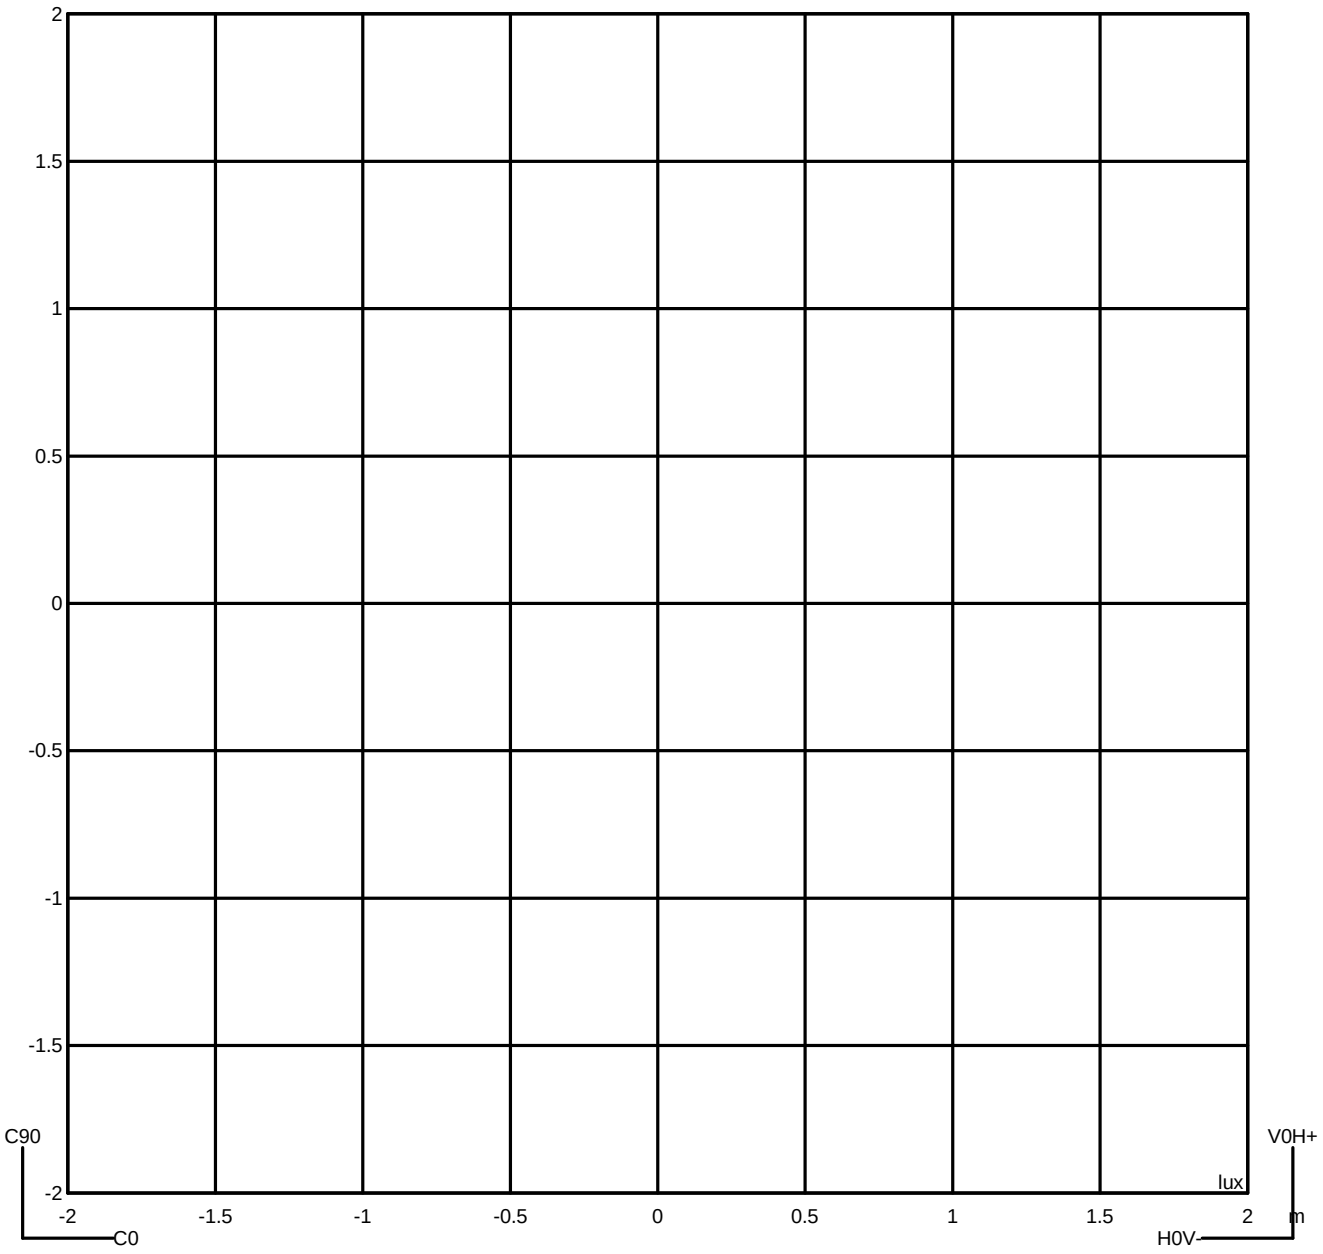

Luminaire
Code DE-0268-NEG
Name Aplique led
Measurem.
Code CL116A17F298G
Name Aplique led


Luminaire Flux	311.43 lm	Luminaire Power	4.10 W	Efficacy	75.96 lm/W	Efficiency	100.00%
Lamps Flux	311.43 lm	Maximum value	487.28 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical


Average Luminance [cd/m²]

0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	
	0	0	0	0	0	0	0	0	0	---


Flush mounted or longitudinal view

		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

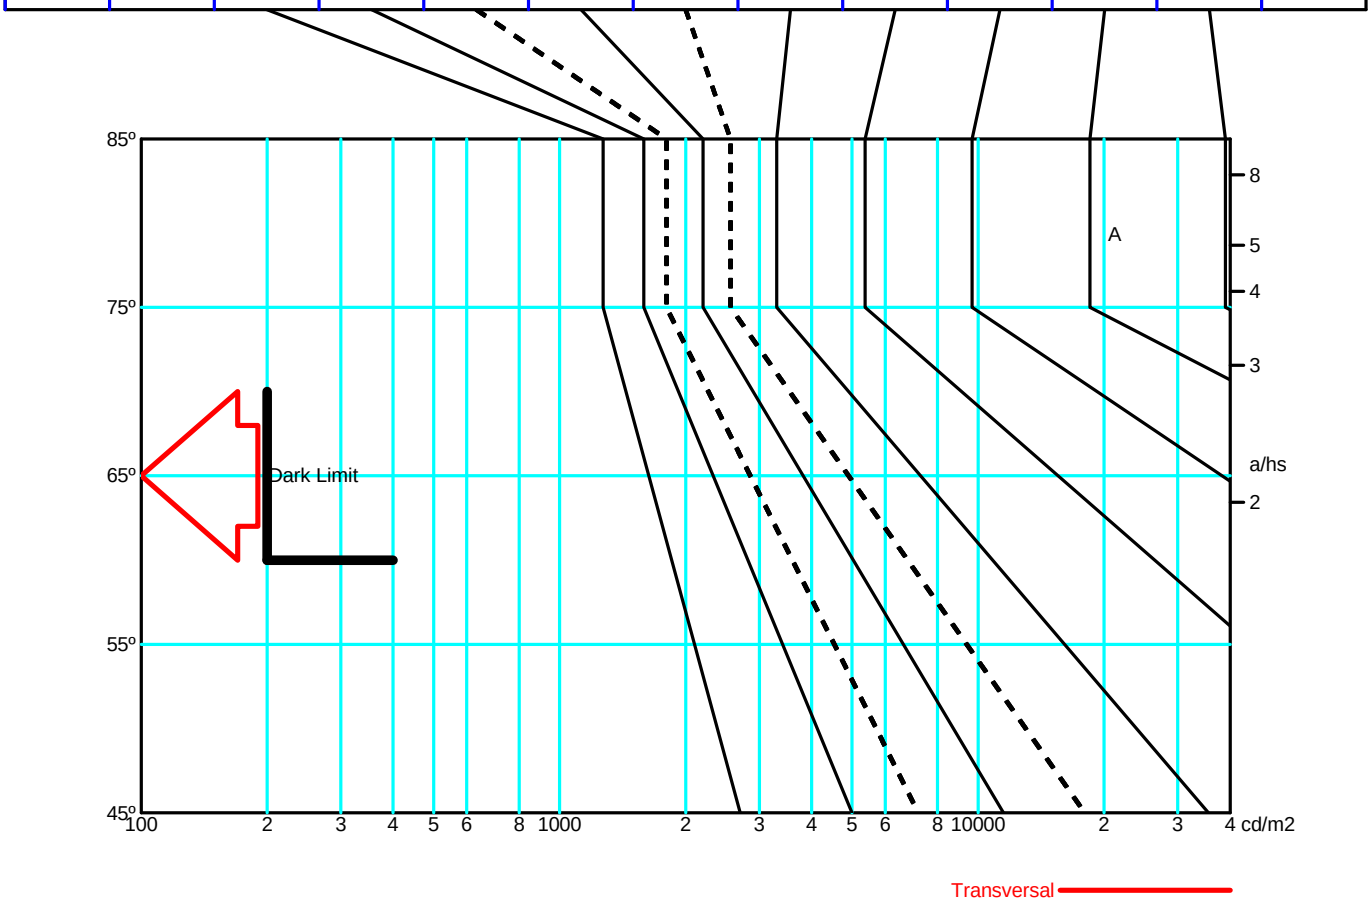

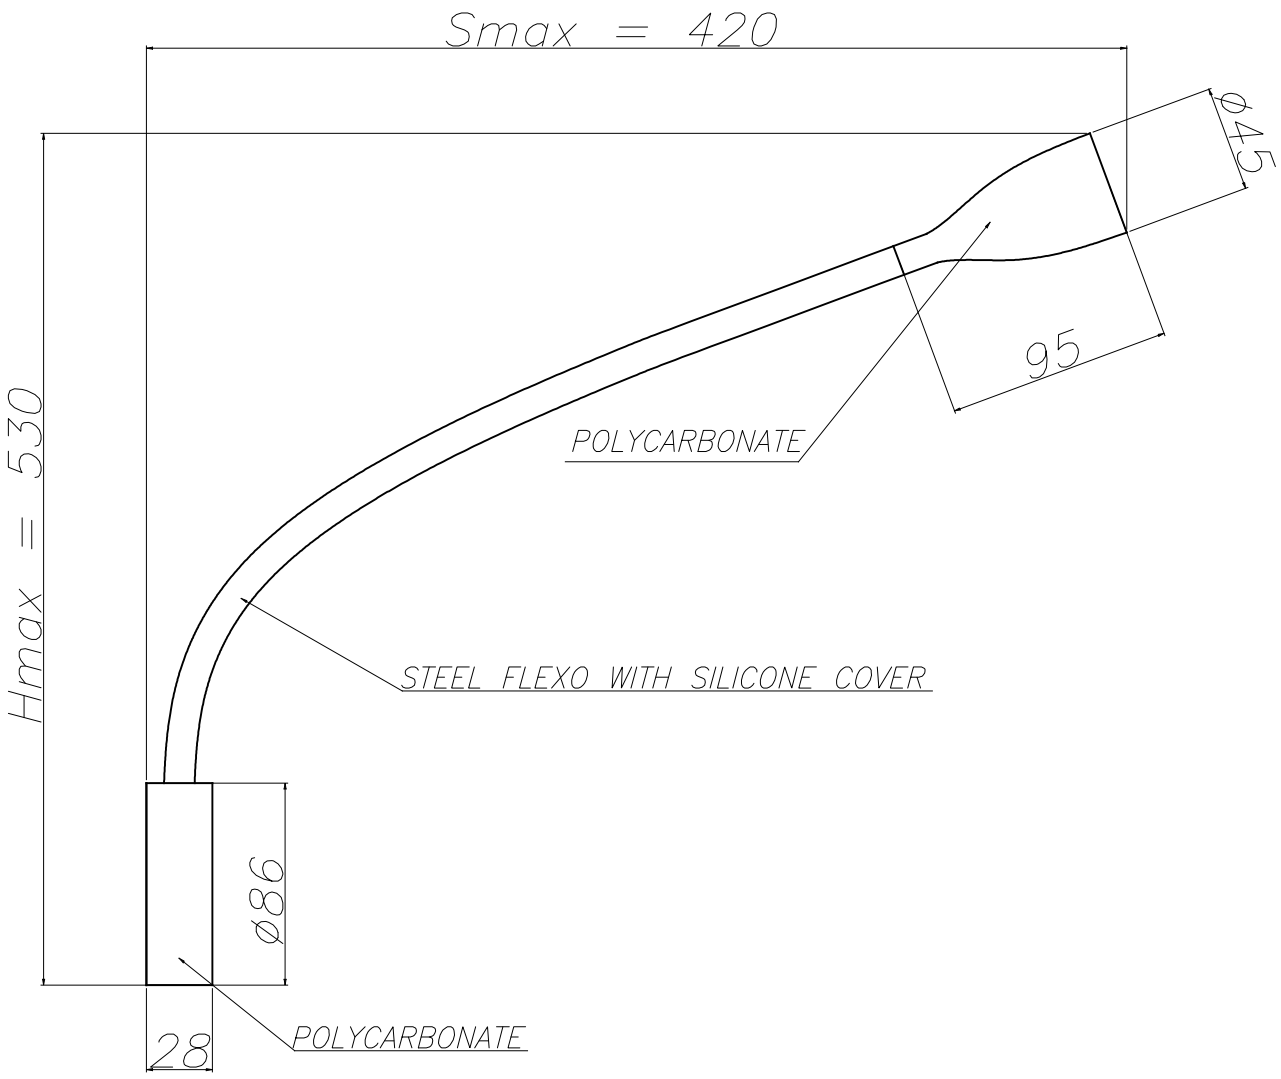



INSTALLATION TEMPLATE
PLANTILLA DE INSTALACIÓN

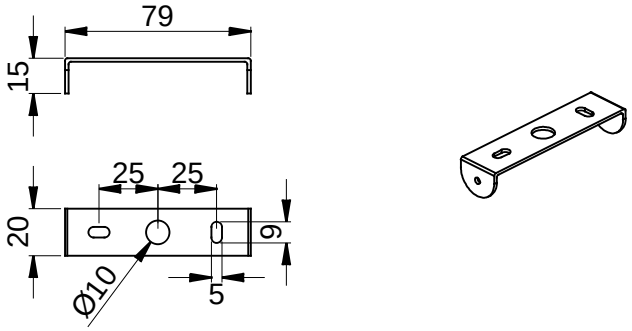



Crobat

DE-0268





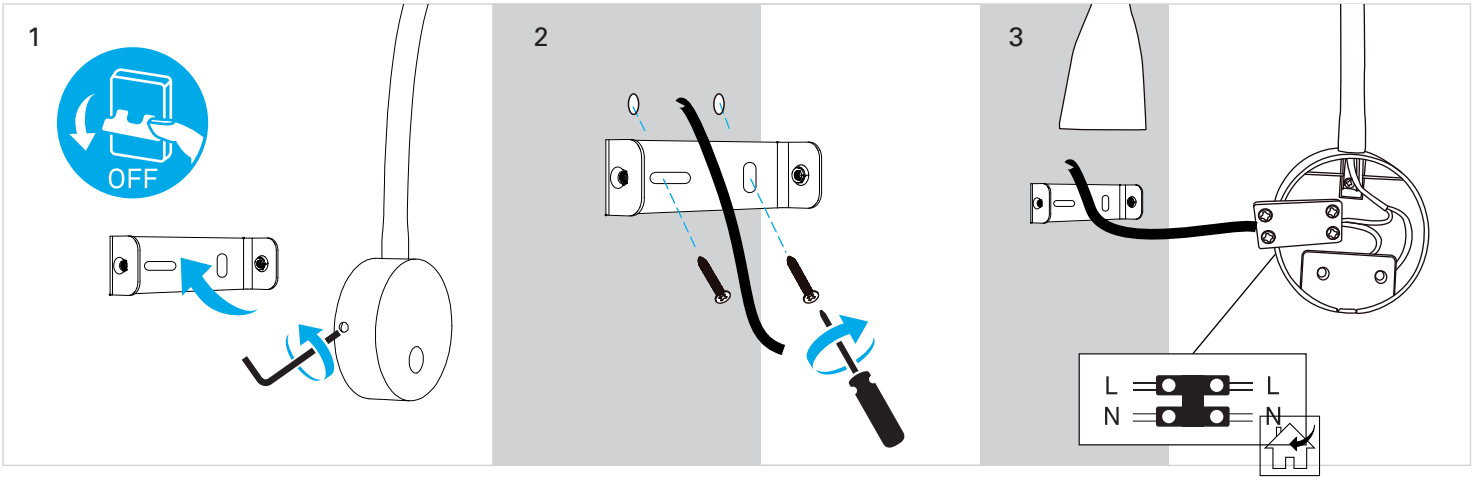

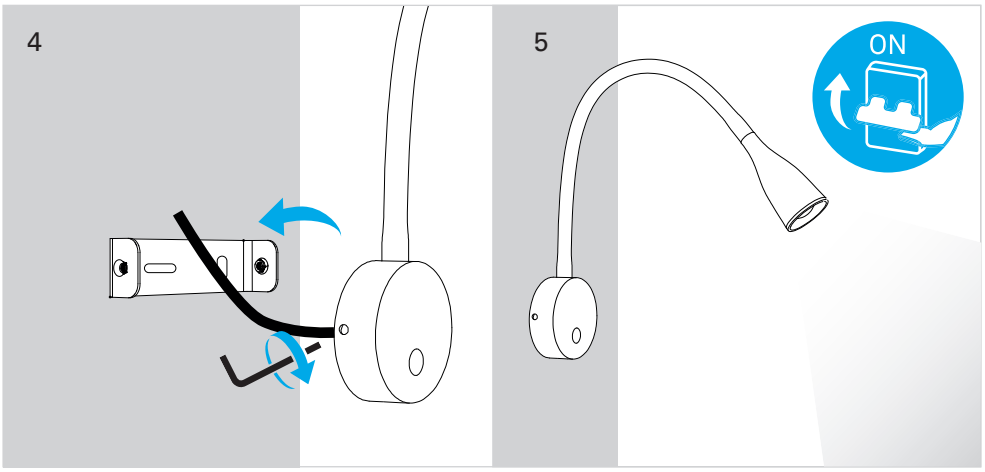

25-08-2021