



Area

PX-0352-GRI

Superficie de Pared IP65 Area E27 15W Gris

CARACTERÍSTICAS TÉCNICAS

IP65 IK09



Potencia total luminaria : 15W

Voltaje / Frecuencia : 100-240V ~ 50/60Hz

Material de la estructura : Policarbonato + ABS

Garantía : 5 Años

Acabado estructura : Gris


Resistencia ambientes marinos : Sí

Material del difusor : Policarbonato

Acabado difusor : Opal


Medida máx. de la bombilla : 150/55 mm

Bombilla recomendada : E27



CARACTERÍSTICAS LUMINOTÉCNICAS

Portalámparas	Cantidad	Potencia fuente de luz (W)	Temperatura de color correlacionada (CCT)
E27	1	Potencia máx. 15W	-



LOGÍSTICA

Peso neto (Kg): 0.55

Peso embalado (Kg): 0.79

Embalaje: 140mm x 140mm x 330mm



Luminaire


Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27

Measur.

Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG Sym. on planes	270-90
Rectangular Luminaire		Length	320 mm	Width	130 mm	Height	132 mm
Rectangular Luminous Area		Length	200 mm	Width	115 mm	Height	80 mm
Horizontal Luminous Area	0.023000 m2	Emitting area on Plane 180°					0.016000 m2
Emitting area on Plane 0°	0.016000 m2	Emitting area on Plane 270°					0.009200 m2
Emitting area on Plane 90°	0.009200 m2	Glare area at 76°					0.021089 m2
Coordinate system	CG Roads	Symmetry Type				Sym. on planes	270-90
Date	06-02-2017	Maximum Gamma Angle				180	
Measurement Distance	0.00	Measurement Flux				1263.00 lm	
Operator	Asselum T2	Source Voltage [V]					
Temperature	25.00 °C	Source current [A]					
Humidity	60.00 %	Photocell					
Notes							

Line	Luminaire Lamps				
	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	PL-E 20W E27	PL-E 20W E27	1263.00	20.00	1
C.I.E.	32 60 83 77 34	D DIN 5040	B21		

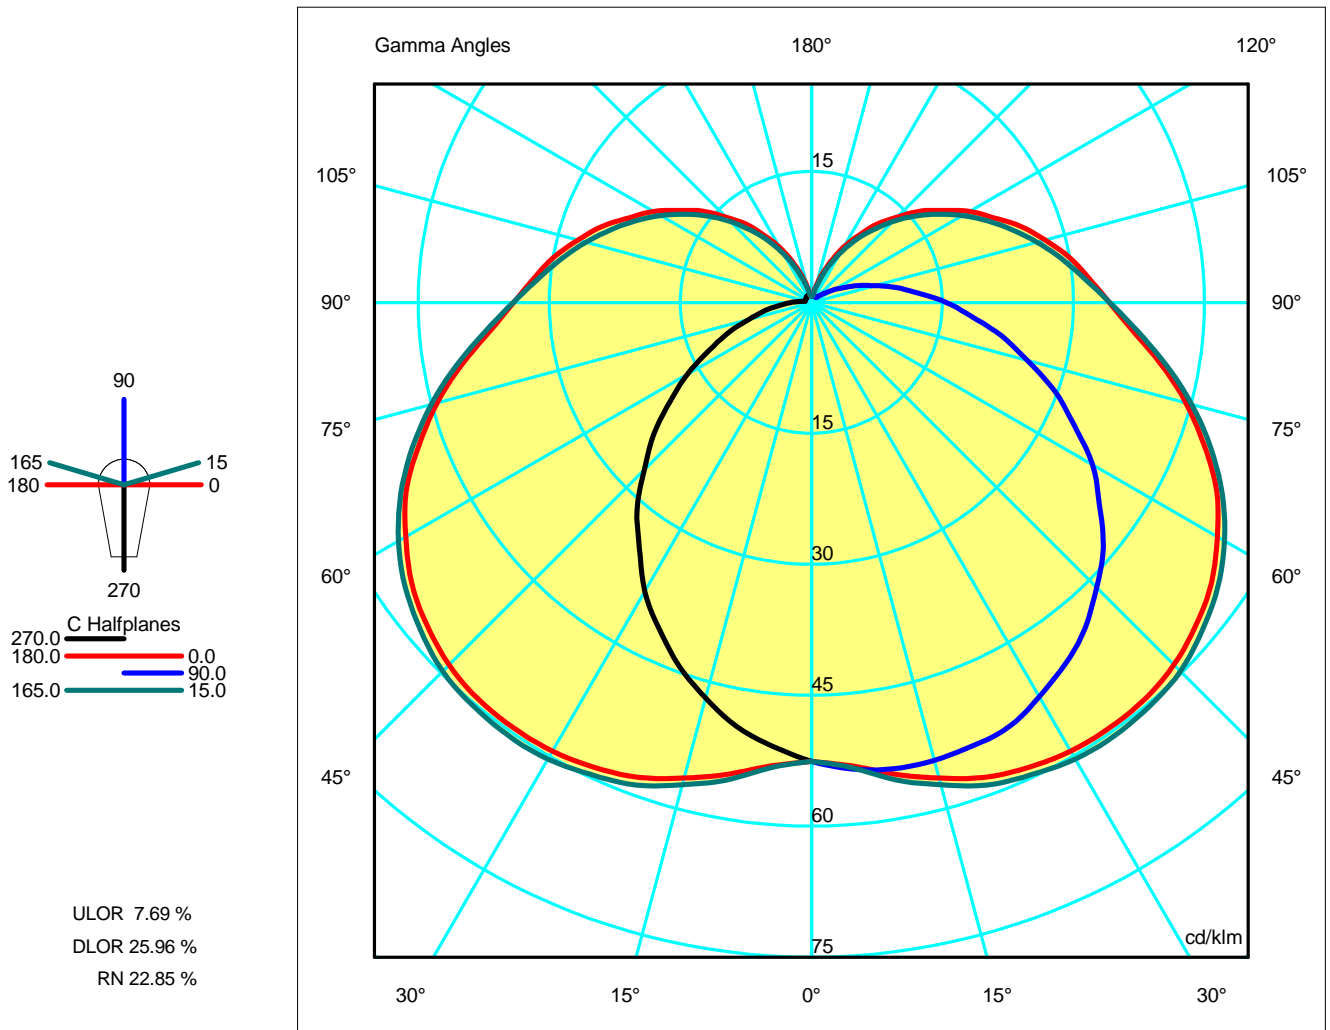



Luminaire

Code PX-0352-GRI
Name Aplique AREA 20W CFL E27

Measurerm.

Code CL116A17F032G
Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

Luminous Intensity Table cd/klm Table 1/1

	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	52.57	52.57	52.57	52.57	52.57	52.57	52.57	52.57	52.57	52.57	52.57	52.57	52.57
G 5.0	51.03	51.26	51.58	51.78	52.39	52.61	53.29	53.48	53.36	53.63	53.58	53.50	53.65
G 10.0	49.32	49.69	50.39	51.36	53.07	53.52	54.85	55.53	54.84	55.24	54.46	54.08	54.22
G 15.0	46.89	47.88	49.47	51.47	53.61	54.82	56.40	57.18	56.80	56.66	55.48	54.28	54.30
G 20.0	44.30	45.70	48.28	51.09	53.96	56.01	57.88	58.81	58.17	57.77	56.13	54.22	54.04
G 25.0	41.25	43.38	46.88	50.45	53.90	56.67	58.76	59.67	59.41	58.57	56.66	53.96	53.60
G 30.0	38.19	40.87	44.84	49.48	53.52	56.96	59.33	60.39	59.90	58.77	56.46	53.19	52.13
G 35.0	34.34	38.04	42.89	48.14	52.74	56.83	59.47	60.54	60.32	58.53	56.03	52.01	50.61
G 40.0	31.07	35.07	40.23	46.62	51.55	56.14	59.33	60.29	60.13	57.91	54.95	50.52	48.71
G 45.0	27.06	31.92	37.82	44.36	49.91	55.31	58.69	59.73	59.43	56.78	53.49	48.40	46.15
G 50.0	23.63	28.78	34.87	42.33	47.99	54.00	57.47	58.40	58.28	55.11	51.61	45.92	43.61
G 55.0	19.75	25.55	32.20	39.62	45.71	52.31	55.90	56.79	56.39	52.99	49.27	43.14	40.23
G 60.0	16.43	22.38	28.99	37.25	43.18	49.90	53.64	54.60	54.31	50.44	46.49	40.00	37.16
G 65.0	12.89	19.37	26.16	34.22	40.30	47.49	51.20	51.88	51.56	47.45	43.40	36.64	33.14
G 70.0	10.13	16.42	23.36	31.70	37.62	44.29	47.84	48.62	48.60	44.05	39.93	32.99	29.63
G 75.0	7.39	13.70	20.73	28.76	34.54	41.39	44.36	45.05	44.86	40.50	36.48	29.39	25.55
G 80.0	5.45	11.42	18.38	26.36	32.02	37.85	40.61	41.23	41.14	36.85	32.73	25.77	22.12
G 85.0	3.61	9.24	16.20	23.86	29.45	35.13	36.91	37.43	37.29	32.94	29.29	22.28	18.39
G 90.0	2.36	7.60	14.49	21.83	27.56	32.41	34.11	34.16	33.70	29.60	25.55	18.94	15.47
G 95.0	1.33	6.02	12.73	19.97	25.57	30.62	31.89	31.37	30.57	26.31	22.50	15.78	12.24
G100.0	0.75	4.78	11.42	18.41	24.04	28.65	29.95	29.04	27.67	23.32	19.20	12.89	9.87
G105.0	0.73	3.88	10.26	17.10	22.15	26.81	27.67	26.71	25.09	20.62	16.68	10.26	7.44
G110.0	0.76	3.32	9.29	15.69	20.46	24.54	25.51	24.40	22.52	18.16	13.91	7.88	5.68
G115.0	0.74	2.76	8.15	14.21	18.46	22.55	22.99	22.17	20.19	15.86	11.79	5.94	4.03
G120.0	0.76	2.29	7.16	12.73	16.60	20.21	20.88	19.90	17.87	13.68	9.57	4.41	2.90
G125.0	0.76	1.90	5.98	11.20	14.67	18.14	18.40	17.61	15.98	11.70	7.90	3.15	1.91
G130.0	0.80	1.61	5.02	9.68	12.77	15.84	16.29	15.37	13.79	9.96	6.19	2.07	1.29
G135.0	0.83	1.37	3.96	8.13	10.79	13.81	13.81	13.09	11.92	8.29	5.12	1.47	0.81
G140.0	0.87	1.16	3.10	6.53	8.87	11.48	11.75	10.78	9.81	6.60	3.92	1.26	0.79
G145.0	0.87	0.98	2.26	5.20	6.98	9.31	9.35	8.67	7.99	5.06	2.92	0.87	0.80
G150.0	0.87	0.90	1.80	3.74	5.23	7.17	7.29	6.44	5.92	3.64	2.00	0.83	0.76
G155.0	0.90	0.91	1.36	2.65	3.56	5.18	5.10	4.49	4.29	2.46	1.39	0.89	0.83
G160.0	0.90	0.94	1.06	1.82	2.32	3.34	3.29	2.67	2.61	1.52	1.00	0.90	0.81
G165.0	0.96	0.90	0.96	1.24	1.35	2.05	1.87	1.49	1.59	0.92	0.93	0.91	0.80
G170.0	0.90	0.87	0.87	0.90	0.88	0.96	0.94	0.83	0.87	0.82	0.85	0.85	0.80
G175.0	0.85	0.78	0.78	0.81	0.78	0.82	0.72	0.79	0.79	0.81	0.76	0.78	0.76
G180.0	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73



Luminaire

Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27

Measur.

Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

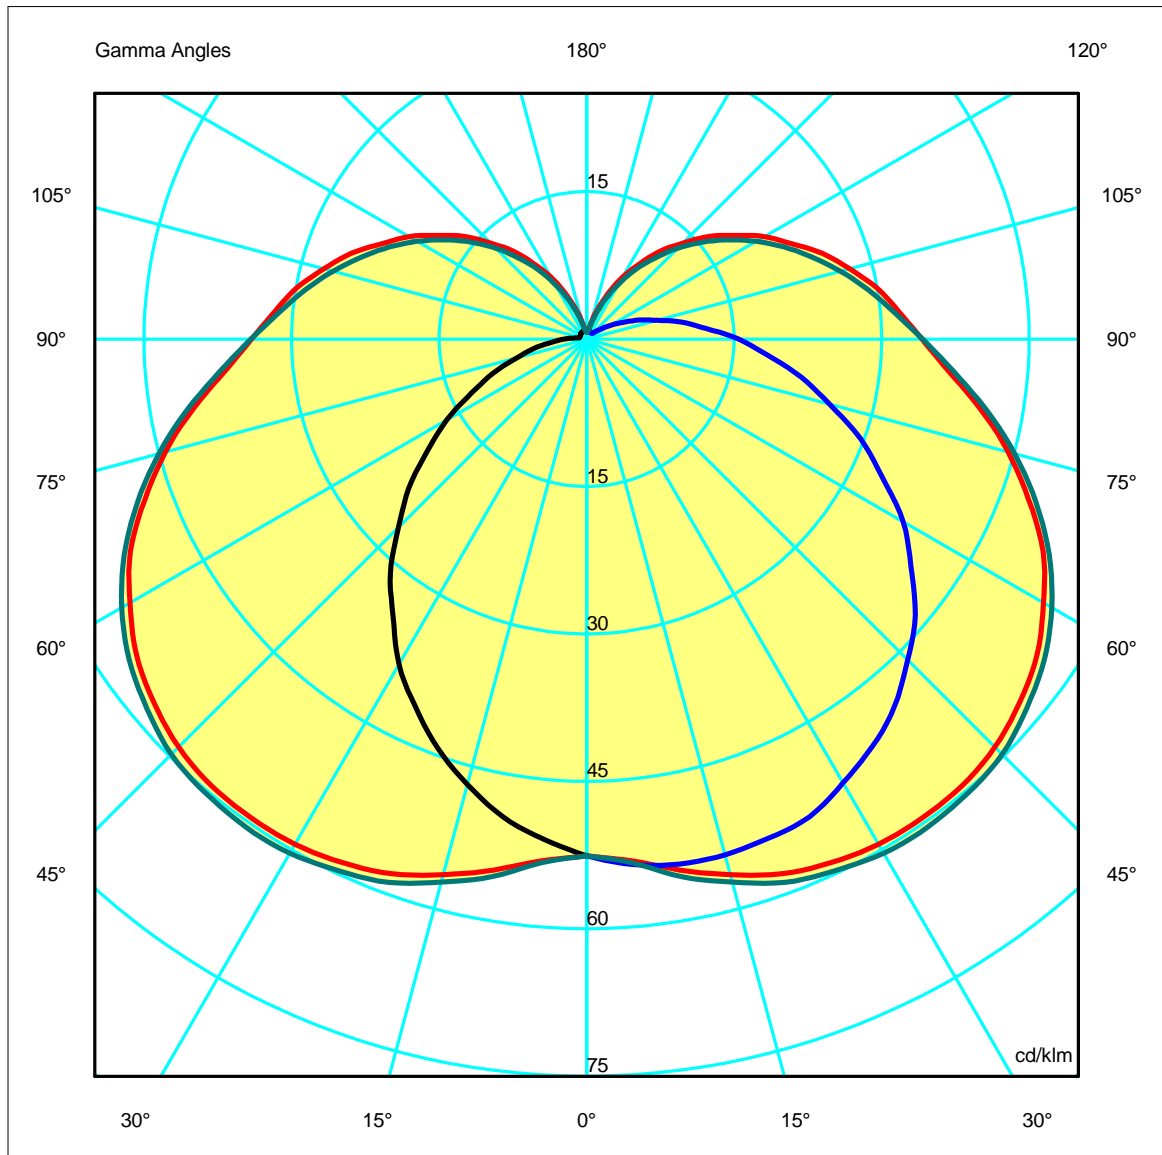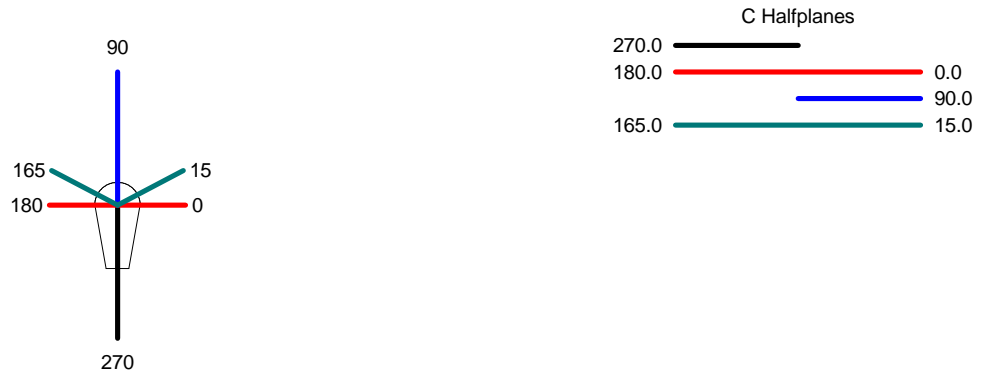



LuminaireCode PX-0352-GRI
Name Aplique AREA 20W CFL E27**Measurem.**Code CL116A17F032G
Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

Right beam angle not found, gamma = 35

Right beam angle not found, gamma = 35

Right beam angle not found, gamma = 35



Luminaire

Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27

Measurment.

Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG Sym. on planes 270-90	

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	14.7	15.9	15.3	16.5	13.0	10.4	11.7	11.0	12.3	13.0
x=2H y=3H	17.1	18.2	17.8	18.8	14.2	11.7	12.8	12.3	13.4	14.2
x=2H y=4H	18.3	19.3	18.9	20.0	14.6	12.1	13.2	12.8	13.8	14.6
x=2H y=6H	19.5	20.4	20.1	21.1	14.9	12.5	13.5	13.2	14.1	14.9
x=2H y=8H	20.0	21.0	20.7	21.7	15.1	12.6	13.6	13.3	14.3	15.1
x=2H y=12H	20.5	21.5	21.2	22.2	15.1	12.7	13.6	13.4	14.3	15.1
x=4H y=2H	15.3	16.4	16.0	17.0	14.5	12.0	13.0	12.6	13.7	14.5
x=4H y=3H	17.9	18.8	18.6	19.6	15.9	13.5	14.4	14.2	15.1	15.9
x=4H y=4H	19.3	20.1	20.0	20.8	16.5	14.1	14.9	14.8	15.6	16.5
x=4H y=6H	20.6	21.3	21.3	22.1	16.9	14.6	15.3	15.3	16.1	16.9
x=4H y=8H	21.3	21.9	22.0	22.7	17.1	14.8	15.5	15.5	16.2	17.1
x=4H y=12H	21.9	22.5	22.7	23.3	17.2	14.9	15.6	15.7	16.3	17.2
x=8H y=4H	19.6	20.3	20.4	21.0	17.6	15.3	16.0	16.0	16.7	17.6
x=8H y=6H	21.2	21.7	21.9	22.5	18.3	16.1	16.6	16.8	17.4	18.3
x=8H y=8H	22.0	22.5	22.8	23.3	18.6	16.4	16.9	17.2	17.7	18.6
x=8H y=12H	22.8	23.2	23.6	24.0	18.9	16.6	17.1	17.5	17.9	18.9
x=12H y=4H	19.6	20.3	20.4	21.0	17.9	15.6	16.2	16.3	16.9	17.9
x=12H y=6H	21.3	21.8	22.1	22.6	18.8	16.6	17.1	17.3	17.9	18.8
x=12H y=8H	22.1	22.6	22.9	23.4	19.2	17.0	17.4	17.8	18.2	19.2




Luminaire

Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27

Measur.

Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

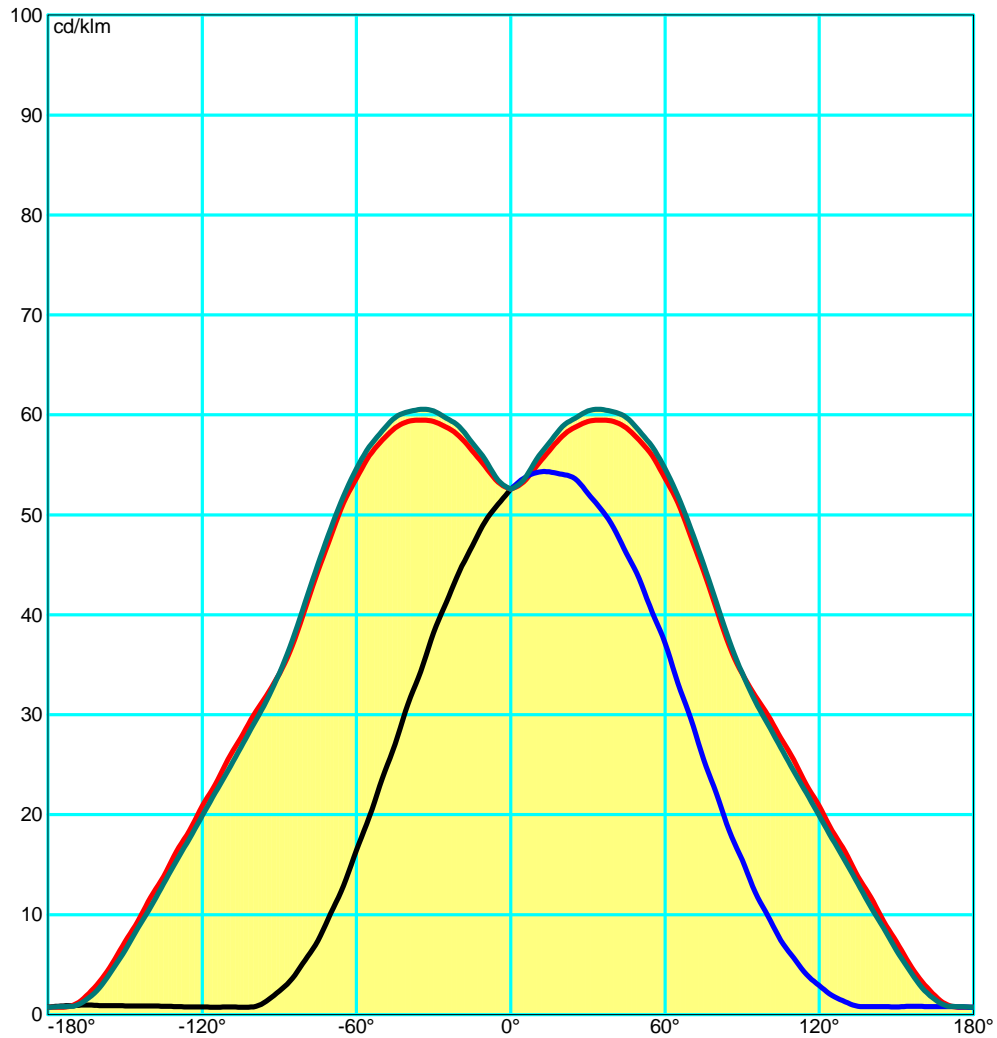

Luminaire
 Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27
Measur.
 Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

Luminance





Luminaire

Code PX-0352-GRI
 Name Applique AREA 20W CFL E27

Measurerm.

Code CL116A17F032G
 Name Applique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 1/3

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91
G 5.0	2768.72	2766.01	2754.50	2748.16	2760.33	2774.64	2784.34	2798.92	2823.47	2857.26	2823.47	2798.92	2784.34
G 10.0	2724.10	2731.42	2706.79	2678.98	2698.48	2711.81	2705.40	2722.70	2765.31	2824.36	2765.31	2722.70	2705.40
G 15.0	2702.65	2699.44	2678.72	2657.49	2662.82	2666.83	2659.53	2664.14	2706.47	2788.10	2706.47	2664.14	2659.53
G 20.0	2698.90	2691.08	2662.78	2630.76	2630.29	2631.34	2618.66	2613.81	2665.65	2756.42	2665.65	2613.81	2618.66
G 25.0	2688.30	2667.53	2642.02	2619.30	2609.04	2604.42	2593.35	2577.23	2630.84	2737.08	2630.84	2577.23	2593.35
G 30.0	2684.02	2659.57	2627.78	2595.59	2579.09	2570.57	2555.88	2535.12	2571.21	2685.47	2571.21	2535.12	2555.88
G 35.0	2681.01	2646.15	2616.51	2588.85	2555.46	2538.36	2527.28	2495.55	2525.09	2650.26	2525.09	2495.55	2527.28
G 40.0	2685.29	2639.14	2603.46	2576.07	2533.67	2506.07	2489.19	2454.53	2484.12	2614.41	2484.12	2454.53	2489.19
G 45.0	2687.77	2635.54	2595.34	2560.54	2506.76	2472.58	2451.98	2405.19	2426.20	2560.21	2426.20	2405.19	2451.98
G 50.0	2684.41	2618.38	2577.24	2544.95	2476.90	2433.99	2412.90	2353.06	2369.80	2522.82	2369.80	2353.06	2412.90
G 55.0	2684.75	2610.02	2558.88	2515.44	2439.75	2393.13	2368.71	2300.04	2305.72	2451.26	2305.72	2300.04	2368.71
G 60.0	2671.63	2589.92	2539.29	2495.62	2404.46	2346.43	2318.35	2237.98	2242.17	2410.57	2242.17	2237.98	2318.35
G 65.0	2669.67	2568.49	2508.89	2462.41	2360.60	2295.37	2265.98	2177.29	2165.76	2317.47	2165.76	2177.29	2265.98
G 70.0	2638.26	2529.86	2476.21	2434.69	2314.37	2235.57	2204.78	2104.35	2090.06	2266.57	2090.06	2104.35	2204.78
G 75.0	2617.41	2493.86	2432.41	2382.38	2260.60	2185.03	2155.15	2043.85	2011.76	2174.33	2011.76	2043.85	2155.15
G 80.0	2596.84	2459.14	2392.84	2343.81	2216.60	2133.16	2096.43	1977.52	1948.18	2140.31	1948.18	1977.52	2096.43
G 85.0	2597.79	2436.32	2367.06	2309.57	2165.06	2084.55	2065.37	1933.68	1883.33	2079.55	1883.33	1933.68	2065.37
G 90.0	2692.25	2484.82	2379.26	2306.19	2160.92	2065.93	2020.83	1884.75	1856.26	2123.20	1856.26	1884.75	2020.83



Luminaire

Code PX-0352-GRI
 Name Applique AREA 20W CFL E27

Measurment

Code CL116A17F032G
 Name Applique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91
G 5.0	2774.64	2760.33	2748.16	2754.50	2766.01	2768.72	2730.49	2707.70	2698.46	2679.94	2672.26	2680.30	2687.69
G 10.0	2711.81	2698.48	2678.98	2706.79	2731.42	2724.10	2650.72	2612.02	2592.59	2542.94	2506.62	2503.26	2510.63
G 15.0	2666.83	2662.82	2657.49	2678.72	2699.44	2702.65	2616.17	2553.48	2508.29	2451.00	2400.65	2371.12	2360.34
G 20.0	2631.34	2630.29	2630.76	2662.78	2691.08	2698.90	2597.38	2513.06	2440.60	2364.20	2299.19	2252.24	2219.22
G 25.0	2604.42	2609.04	2619.30	2642.02	2667.53	2688.30	2575.27	2471.22	2376.64	2286.47	2209.16	2145.69	2093.05
G 30.0	2570.57	2579.09	2595.59	2627.78	2659.57	2684.02	2556.50	2433.83	2318.96	2216.86	2119.07	2029.72	1968.51
G 35.0	2538.36	2555.46	2588.85	2616.51	2646.15	2681.01	2539.80	2398.27	2263.59	2147.01	2037.67	1934.72	1853.56
G 40.0	2506.07	2533.67	2576.07	2603.46	2639.14	2685.29	2521.10	2356.29	2208.53	2087.04	1956.73	1822.39	1731.89
G 45.0	2472.58	2506.76	2560.54	2595.34	2635.54	2687.77	2510.96	2325.83	2150.47	2008.20	1871.00	1733.70	1624.20
G 50.0	2433.99	2476.90	2544.95	2577.24	2618.38	2684.41	2498.05	2291.89	2095.45	1951.12	1797.97	1630.00	1510.91
G 55.0	2393.13	2439.75	2515.44	2558.88	2610.02	2684.75	2484.90	2259.66	2039.09	1876.24	1717.82	1548.08	1409.64
G 60.0	2346.43	2404.46	2495.62	2539.29	2589.92	2671.63	2455.91	2214.16	1984.29	1825.97	1650.37	1445.64	1298.51
G 65.0	2295.37	2360.60	2462.41	2508.89	2568.49	2669.67	2443.33	2180.06	1924.60	1752.28	1572.92	1365.53	1205.60
G 70.0	2235.57	2314.37	2434.69	2476.21	2529.86	2638.26	2399.95	2134.98	1884.50	1713.05	1521.02	1289.74	1108.76
G 75.0	2185.03	2260.60	2382.38	2432.41	2493.86	2617.41	2384.20	2109.78	1834.55	1654.22	1461.87	1224.69	1024.37
G 80.0	2133.16	2216.60	2343.81	2392.84	2459.14	2596.84	2346.76	2080.13	1824.29	1639.50	1431.44	1177.37	957.03
G 85.0	2084.55	2165.06	2309.57	2367.06	2436.32	2597.79	2366.29	2103.00	1824.31	1623.77	1407.88	1142.01	894.49
G 90.0	2065.93	2160.92	2306.19	2379.26	2484.82	2692.25	2425.50	2156.23	1886.09	1660.33	1421.84	1145.97	869.03

Luminaire

Code PX-0352-GRI
Name Aplique AREA 20W CFL E27

Measur.

Code CL116A17F032G
Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 3/3


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91	2886.91
G 5.0	2699.06	2717.66	2699.06	2687.69	2680.30	2672.26	2679.94	2698.46	2707.70	2730.49
G 10.0	2532.06	2568.82	2532.06	2510.63	2503.26	2506.62	2542.94	2592.59	2612.02	2650.72
G 15.0	2373.22	2407.69	2373.22	2360.34	2371.12	2400.65	2451.00	2508.29	2553.48	2616.17
G 20.0	2220.77	2259.74	2220.77	2219.22	2252.24	2299.19	2364.20	2440.60	2513.06	2597.38
G 25.0	2078.19	2106.32	2078.19	2093.05	2145.69	2209.16	2286.47	2376.64	2471.22	2575.27
G 30.0	1949.03	1967.37	1949.03	1968.51	2029.72	2119.07	2216.86	2318.96	2433.83	2556.50
G 35.0	1808.74	1798.18	1808.74	1853.56	1934.72	2037.67	2147.01	2263.59	2398.27	2539.80
G 40.0	1685.17	1667.61	1685.17	1731.89	1822.39	1956.73	2087.04	2208.53	2356.29	2521.10
G 45.0	1549.34	1501.01	1549.34	1624.20	1733.70	1871.00	2008.20	2150.47	2325.83	2510.96
G 50.0	1430.76	1367.00	1430.76	1510.91	1630.00	1797.97	1951.12	2095.45	2291.89	2498.05
G 55.0	1300.30	1203.61	1300.30	1409.64	1548.08	1717.82	1876.24	2039.09	2259.66	2484.90
G 60.0	1184.15	1066.00	1184.15	1298.51	1445.64	1650.37	1825.97	1984.29	2214.16	2455.91
G 65.0	1064.01	901.57	1064.01	1205.60	1365.53	1572.92	1752.28	1924.60	2180.06	2443.33
G 70.0	951.94	774.88	951.94	1108.76	1289.74	1521.02	1713.05	1884.50	2134.98	2399.95
G 75.0	840.83	628.93	840.83	1024.37	1224.69	1461.87	1654.22	1834.55	2109.78	2384.20
G 80.0	756.26	526.98	756.26	957.03	1177.37	1431.44	1639.50	1824.29	2080.13	2346.76
G 85.0	665.51	407.98	665.51	894.49	1142.01	1407.88	1623.77	1824.31	2103.00	2366.29
G 90.0	609.14	323.86	609.14	869.03	1145.97	1421.84	1660.33	1886.09	2156.23	2425.50

Luminaire
 Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27
Measurment.
 Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG	Sym. on planes 270-90

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 6.3 Tight Tilting Angle:0°

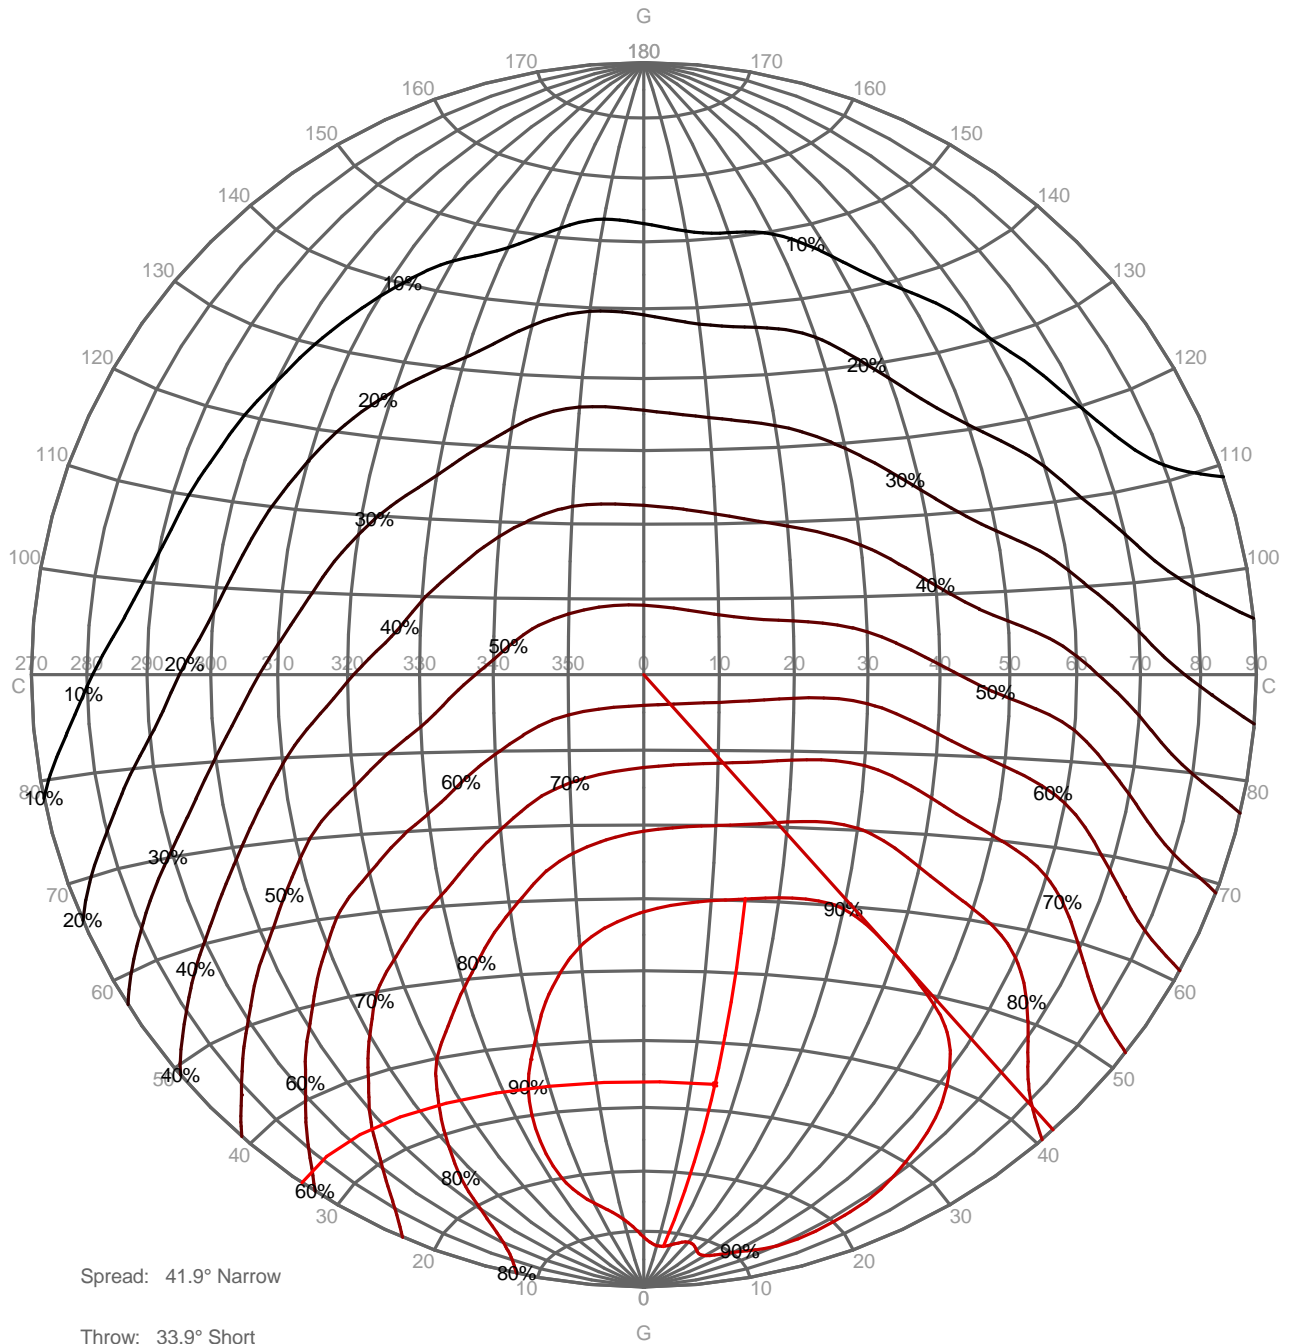


Luminaire
 Code PX-0352-GRI
 Name Aplique AREA 20W CFL E27
Measur.
 Code CL116A17F032G
 Name Aplique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG Sym. on planes 270-90	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

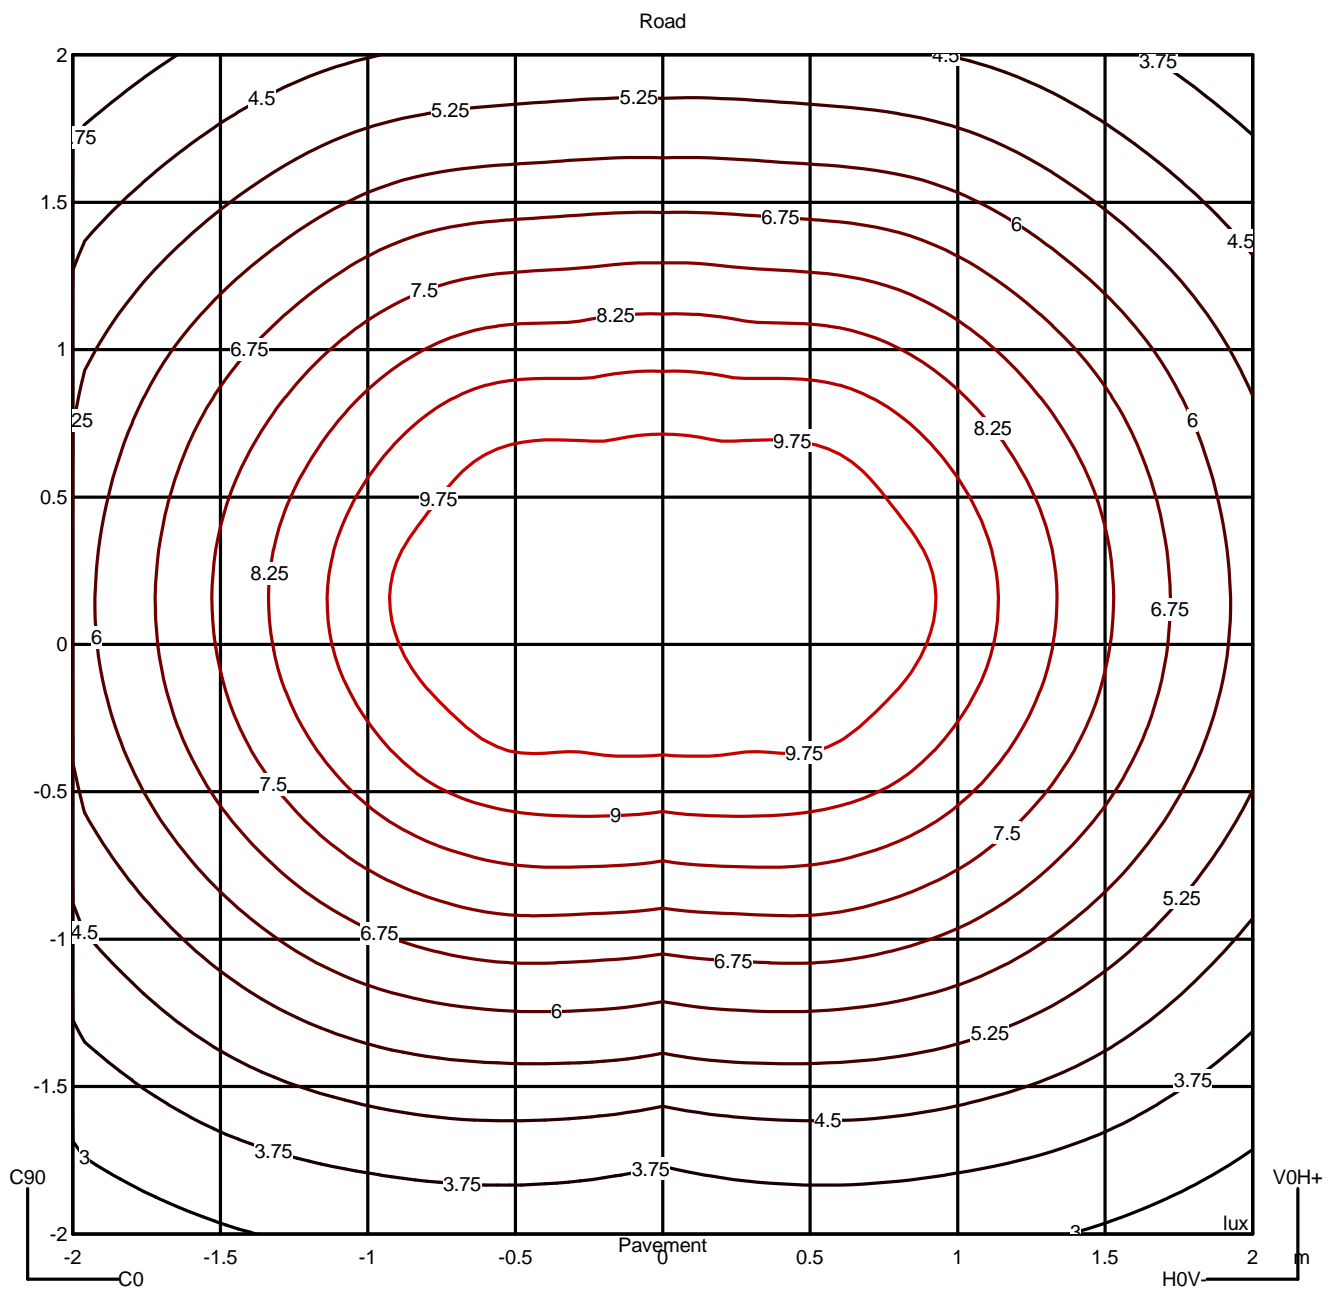

Luminaire

Code PX-0352-GRI
 Name Applique AREA 20W CFL E27


Measur.


Code CL116A17F032G
 Name Applique AREA 20W CFL E27

Luminaire Flux	424.92 lm	Luminaire Power	20.00 W	Efficacy	21.25 lm/W	Efficiency	33.64%
Lamps Flux	1263.00 lm	Maximum value	60.54 cd/klm	Position	C=15.00 G=35.00	CG Sym. on planes 270-90	


		Average Luminance [cd/m ²]									
		45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°		2688	2684	2685	2672	2670	2638	2617	2597	2598	---
90.0°		2560	2523	2451	2411	2317	2267	2174	2140	2080	---

Flush mounted or transversal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300				1.15	
B	1		2000	1500	1000	750	500	<300			1.5	
C					2000		1000	500	<300		1.85	
D	2						2000	1000	500	<300	2.2	
E	3							2000	1000	500	<300	2.55



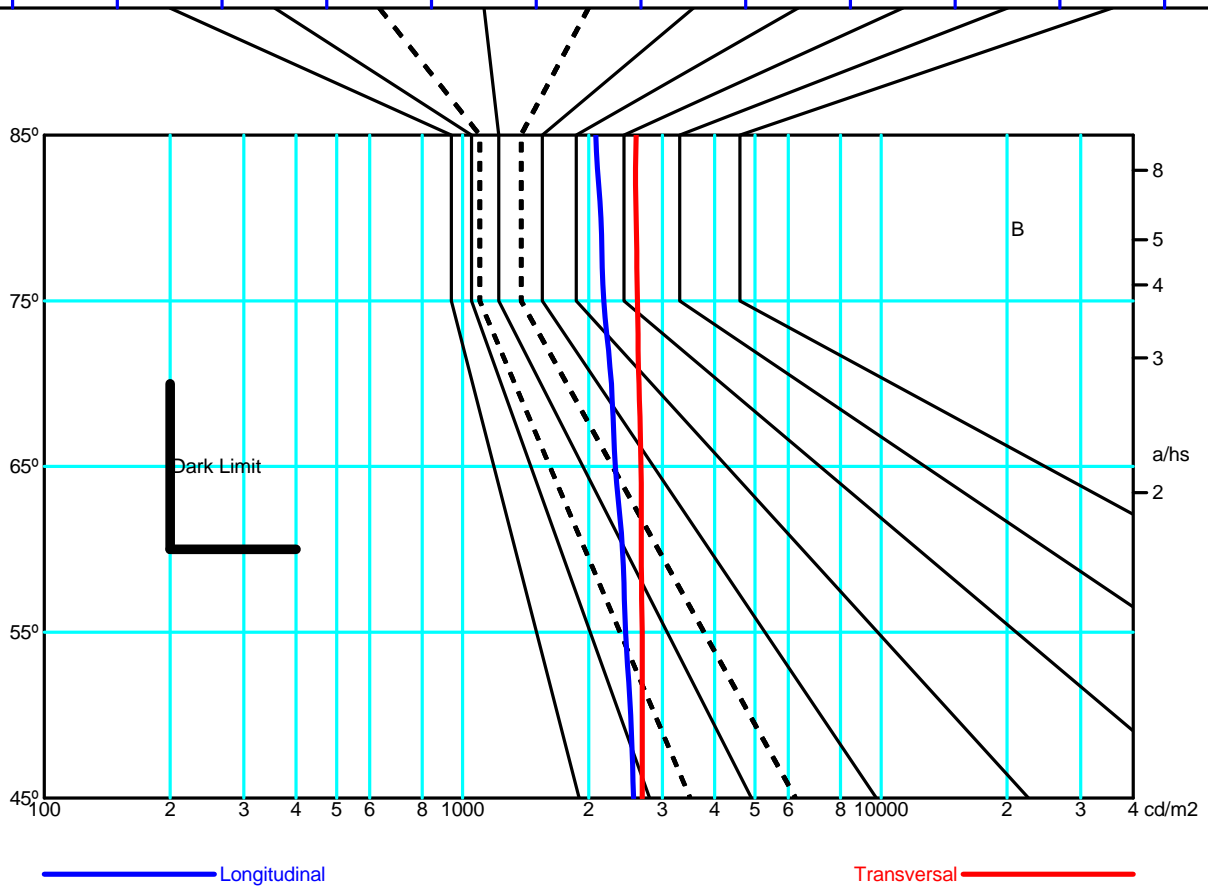


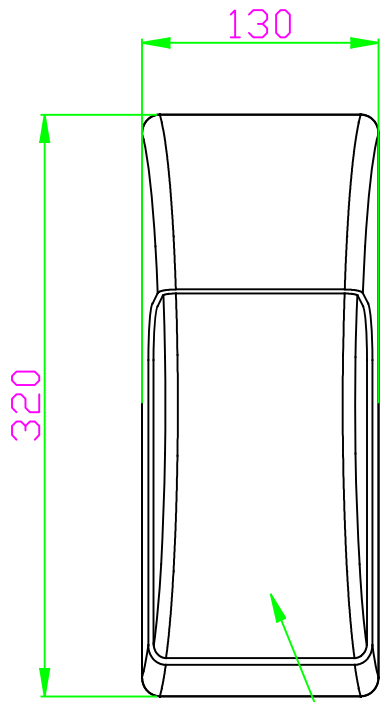


PC Opal diffuser with UV filter

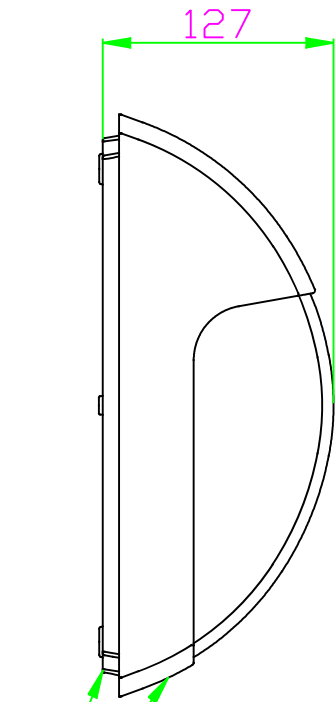

ABS+PC with UV filter / Grey

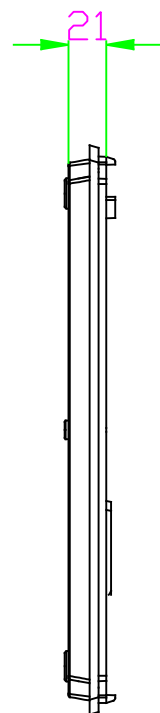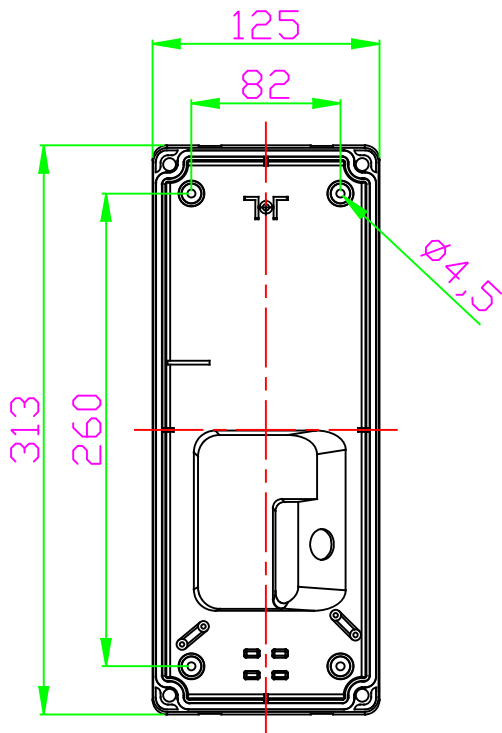





Area

PX-0352

FOR
LIGHT



1

2

3

4

L	—	—	L
N	—	—	N

5

E-27

6

7

ON

