
Instructions de montage
Données photométriques

Mandela 800mm

PX-0087-ANT

Balise IP44 Mandela 800mm E27 15W Gris urbain





CARACTÉRISTIQUES TECHNIQUES

IP44 IK08

Puissance totale du luminaire : 15W

Matière de la structure : Aluminium

Finition structure : Gris urbain

Matière du diffuseur : Polycarbonate

Finition diffuseur : Opale

Dimension maxi. de l'ampoule : 150/75 mm

Ampoule recommandée : E27


Tension/Fréquence : 100-240V ~ 50/60Hz

Garantie : 5 Ans

Luminaire facilement recyclable

CARACTÉRISTIQUES LUMINOTECHNIQUES

Douille	Quantité	Puissance source lumineuse (W)	Température de couleur corrélée (CCT)
E27	1	Puissance maxi. 15W	-



LOGISTIQUE

Poids net (kg): 2.16

Poids emballé (kg): 2.44

Emballage: 140mm x 135mm x 810mm

6 Un

APPLICATION DU LUMINAIRE



Il se peut que l'image ne corresponde pas à la référence. LEDS C4 se réserve le droit de modifier l'un des éléments qui composent le produit. Les données relatives au flux, à la puissance et à la température de couleur sont soumises à une tolérance de +- 10 %.

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Rectangular Luminaire	Length	123 mm	Width	123 mm	Height	805 mm
Rectangular Luminous Area	Length	123 mm	Width	123 mm	Height	120 mm

Horizontal Luminous Area	0.015129 m2	Emitting area on Plane 180°	0.014760 m2
Emitting area on Plane 0°	0.014760 m2	Emitting area on Plane 270°	0.014760 m2
Emitting area on Plane 90°	0.014760 m2	Glare area at 76°	0.017982 m2

Coordinate system	CG	Symmetry Type	Asymmetrical
Date	24-11-2017	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	1500.00 lm


Operator	LEDS	Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps


Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	DLX EL LL 23W827E27	DLX EL LL 23W827E27	1500.00	23.00	1

C.I.E.	12 36 67 42 82	D DIN 5040	C12
F UTE	--	B NBN	BZ 10

123mm x 123mm



C Halfplanes
180.0 — 0.0
270.0 — 90.0

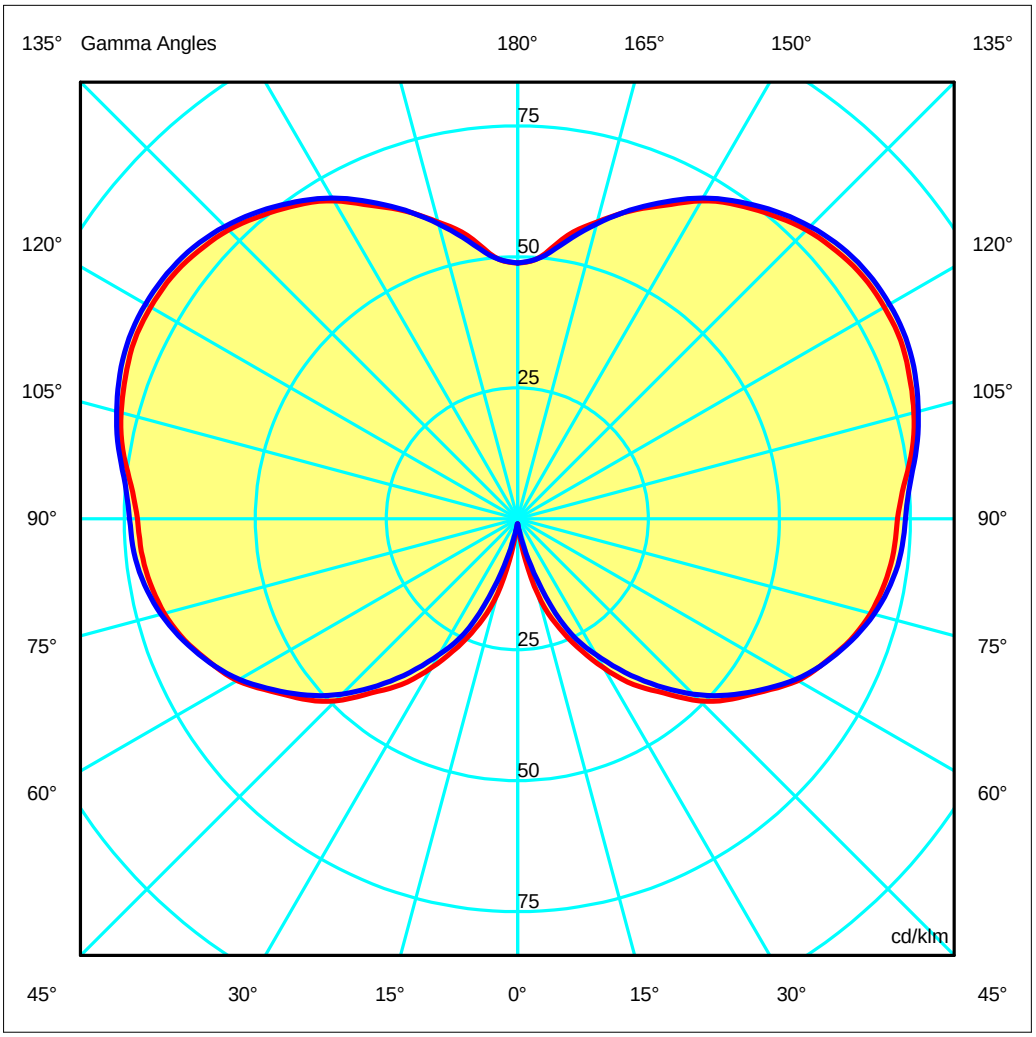

ULOR 47.83 %
DLOR 34.17 %
RN 58.33 %

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Luminous Intensity Table cd/klm **Table 1/1**


	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00	C 105.00	C 120.00	C 135.00	C 150.00	C 165.00
G 0.0	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
G 5.0	1.69	2.16	2.66	1.93	1.98	2.07	1.36	2.07	1.98	1.93	2.66	2.16
G 10.0	6.58	4.79	6.11	6.33	5.15	5.17	3.34	5.17	5.15	6.33	6.11	4.79
G 15.0	14.87	10.75	11.42	11.78	11.06	9.84	7.97	9.84	11.06	11.78	11.42	10.75
G 20.0	21.25	17.17	17.51	17.42	17.07	16.54	15.87	16.54	17.07	17.42	17.51	17.17
G 25.0	26.91	24.08	24.47	23.95	23.15	23.59	24.16	23.59	23.15	23.95	24.47	24.08
G 30.0	32.81	29.81	30.28	29.84	29.15	29.82	29.92	29.82	29.15	29.84	30.28	29.81
G 35.0	38.60	35.61	35.93	35.56	34.97	35.69	35.77	35.69	34.97	35.56	35.93	35.61
G 40.0	43.38	41.85	42.34	41.78	40.49	41.40	41.58	41.40	40.49	41.78	42.34	41.85
G 45.0	49.14	46.92	47.57	46.93	45.73	46.89	47.29	46.89	45.73	46.93	47.57	46.92
G 50.0	53.46	52.01	52.74	52.03	50.55	51.93	52.38	51.93	50.55	52.03	52.74	52.01
G 55.0	57.36	56.87	57.52	56.82	55.05	56.51	56.85	56.51	55.05	56.82	57.52	56.87
G 60.0	61.74	60.84	61.61	60.77	59.06	60.59	61.25	60.59	59.06	60.77	61.61	60.84
G 65.0	64.76	64.78	65.71	64.70	62.59	64.31	64.83	64.31	62.59	64.70	65.71	64.78
G 70.0	67.57	67.84	68.64	67.79	65.53	67.47	67.84	67.47	65.53	67.79	68.64	67.84
G 75.0	69.72	70.21	70.99	70.11	67.88	69.89	70.39	69.89	67.88	70.11	70.99	70.21
G 80.0	71.12	72.32	73.06	72.06	69.63	71.71	72.26	71.71	69.63	72.06	73.06	72.32
G 85.0	72.03	73.38	74.17	73.20	70.72	72.87	73.45	72.87	70.72	73.20	74.17	73.38
G 90.0	72.53	73.98	74.82	73.93	71.38	73.67	74.01	73.67	71.38	73.93	74.82	73.98
G 95.0	74.03	75.22	76.14	75.25	72.61	74.94	75.14	74.94	72.61	75.25	76.14	75.22
G100.0	76.49	77.11	78.03	77.00	74.65	76.76	77.29	76.76	74.65	77.00	78.03	77.11
G105.0	78.30	79.15	80.02	79.03	76.63	78.72	79.17	78.72	76.63	79.03	80.02	79.15
G110.0	79.58	80.74	81.51	80.70	78.26	80.36	80.72	80.36	78.26	80.70	81.51	80.74
G115.0	80.64	81.63	82.38	81.64	79.34	81.40	81.74	81.40	79.34	81.64	82.38	81.63
G120.0	80.81	81.99	82.64	81.99	79.79	81.77	81.97	81.77	79.79	81.99	82.64	81.99
G125.0	80.55	81.69	82.26	81.70	79.63	81.49	81.63	81.49	79.63	81.70	82.26	81.69
G130.0	79.50	80.71	81.30	80.83	78.86	80.59	80.67	80.59	78.86	80.83	81.30	80.71
G135.0	77.97	78.94	79.49	79.18	77.42	79.05	78.96	79.05	77.42	79.18	79.49	78.94
G140.0	75.67	76.79	77.35	77.16	75.43	76.97	76.64	76.97	75.43	77.16	77.35	76.79
G145.0	73.16	74.09	74.63	74.57	72.92	74.32	73.87	74.32	72.92	74.57	74.63	74.09
G150.0	70.11	70.39	71.12	71.12	69.89	71.10	70.71	71.10	69.89	71.12	71.12	70.39
G155.0	66.02	66.59	67.51	67.52	66.30	67.44	66.81	67.44	66.30	67.52	67.51	66.59
G160.0	62.55	62.22	62.95	63.10	62.33	63.36	62.68	63.36	62.33	63.10	62.95	62.22
G165.0	58.69	57.43	58.79	58.85	58.20	59.06	58.31	59.06	58.20	58.85	58.79	57.43
G170.0	54.95	52.81	54.70	54.83	53.84	55.00	53.83	55.00	53.84	54.83	54.70	52.81
G175.0	50.18	50.26	50.55	50.35	50.38	51.48	50.05	51.48	50.38	50.35	50.55	50.26
G180.0	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83

	C 180.00	C 195.00	C 210.00	C 225.00	C 240.00	C 255.00	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00
G 0.0	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
G 5.0	1.69	2.16	2.66	1.93	1.98	2.07	1.36	2.07	1.98	1.93	2.66	2.16
G 10.0	6.58	4.79	6.11	6.33	5.15	5.17	3.34	5.17	5.15	6.33	6.11	4.79
G 15.0	14.87	10.75	11.42	11.78	11.06	9.84	7.97	9.84	11.06	11.78	11.42	10.75
G 20.0	21.25	17.17	17.51	17.42	17.07	16.54	15.87	16.54	17.07	17.42	17.51	17.17
G 25.0	26.91	24.08	24.47	23.95	23.15	23.59	24.16	23.59	23.15	23.95	24.47	24.08
G 30.0	32.81	29.81	30.28	29.84	29.15	29.82	29.92	29.82	29.15	29.84	30.28	29.81
G 35.0	38.60	35.61	35.93	35.56	34.97	35.69	35.77	35.69	34.97	35.56	35.93	35.61
G 40.0	43.38	41.85	42.34	41.78	40.49	41.40	41.58	41.40	40.49	41.78	42.34	41.85
G 45.0	49.14	46.92	47.57	46.93	45.73	46.89	47.29	46.89	45.73	46.93	47.57	46.92
G 50.0	53.46	52.01	52.74	52.03	50.55	51.93	52.38	51.93	50.55	52.03	52.74	52.01
G 55.0	57.36	56.87	57.52	56.82	55.05	56.51	56.85	56.51	55.05	56.82	57.52	56.87
G 60.0	61.74	60.84	61.61	60.77	59.06	60.59	61.25	60.59	59.06	60.77	61.61	60.84
G 65.0	64.76	64.78	65.71	64.70	62.59	64.31	64.83	64.31	62.59	64.70	65.71	64.78
G 70.0	67.57	67.84	68.64	67.79	65.53	67.47	67.84	67.47	65.53	67.79	68.64	67.84
G 75.0	69.72	70.21	70.99	70.11	67.88	69.89	70.39	69.89	67.88	70.11	70.99	70.21
G 80.0	71.12	72.32	73.06	72.06	69.63	71.71	72.26	71.71	69.63	72.06	73.06	72.32
G 85.0	72.03	73.38	74.17	73.20	70.72	72.87	73.45	72.87	70.72	73.20	74.17	73.38
G 90.0	72.53	73.98	74.82	73.93	71.38	73.67	74.01	73.67	71.38	73.93	74.82	73.98
G 95.0	74.03	75.22	76.14	75.25	72.61	74.94	75.14	74.94	72.61	75.25	76.14	75.22
G100.0	76.49	77.11	78.03	77.00	74.65	76.76	77.29	76.76	74.65	77.00	78.03	77.11
G105.0	78.30	79.15	80.02	79.03	76.63	78.72	79.17	78.72	76.63	79.03	80.02	79.15
G110.0	79.58	80.74	81.51	80.70	78.26	80.36	80.72	80.36	78.26	80.70	81.51	80.74
G115.0	80.64	81.63	82.38	81.64	79.34	81.40	81.74	81.40	79.34	81.64	82.38	81.63
G120.0	80.81	81.99	82.64	81.99	79.79	81.77	81.97	81.77	79.79	81.99	82.64	81.99
G125.0	80.55	81.69	82.26	81.70	79.63	81.49	81.63	81.49	79.63	81.70	82.26	81.69
G130.0	79.50	80.71	81.30	80.83	78.86	80.59	80.67	80.59	78.86	80.83	81.30	80.71
G135.0	77.97	78.94	79.49	79.18	77.42	79.05	78.96	79.05	77.42	79.18	79.49	78.94
G140.0	75.67	76.79	77.35	77.16	75.43	76.97	76.64	76.97	75.43	77.16	77.35	76.79
G145.0	73.16	74.09	74.63	74.57	72.92	74.32	73.87	74.32	72.92	74.57	74.63	74.09
G150.0	70.11	70.39	71.12	71.12	69.89	71.10	70.71	71.10	69.89	71.12	71.12	70.39
G155.0	66.02	66.59	67.51	67.52	66.30	67.44	66.81	67.44	66.30	67.52	67.51	66.59
G160.0	62.55	62.22	62.95	63.10	62.33	63.36	62.68	63.36	62.33	63.10	62.95	62.22
G165.0	58.69	57.43	58.79	58.85	58.20	59.06	58.31	59.06	58.20	58.85	58.79	57.43
G170.0	54.95	52.81	54.70	54.83	53.84	55.00	53.83	55.00	53.84	54.83	54.70	52.81
G175.0	50.18	50.26	50.55	50.35	50.38	51.48	50.05	51.48	50.38	50.35	50.55	50.26
G180.0	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83	48.83

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal


Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

123mm x 123mm



C Halfplanes



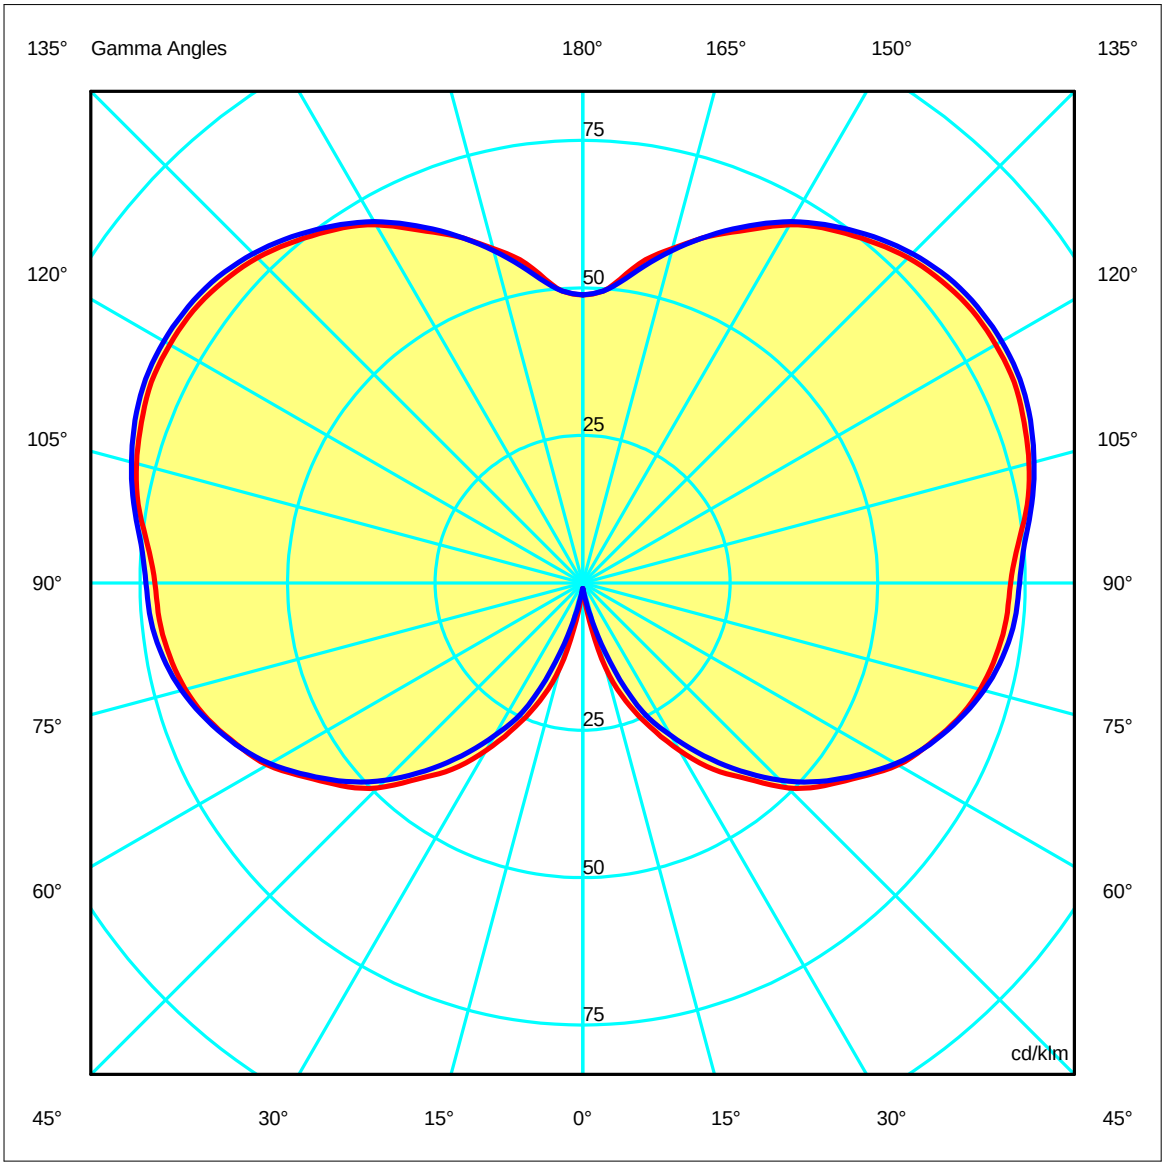

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Right beam angle not found, gamma = -61

Right beam angle not found, gamma = -61

Right beam angle not found, gamma = -61

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical


UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	Viewed Crosswise					Viewed Endwise				
x=2H y=2H	12.9	13.8	13.8	14.8	16.1	12.8	13.7	13.7	14.7	16.0
x=2H y=3H	16.1	16.9	17.1	17.9	19.3	16.0	16.9	17.0	17.9	19.2
x=2H y=4H	17.7	18.5	18.7	19.5	20.9	17.7	18.5	18.7	19.5	20.9
x=2H y=6H	19.4	20.1	20.4	21.1	22.5	19.4	20.1	20.4	21.1	22.5
x=2H y=8H	20.2	20.9	21.2	21.9	23.3	20.2	20.9	21.2	21.9	23.3
x=2H y=12H	20.9	21.6	22.0	22.6	24.0	21.0	21.7	22.0	22.7	24.1
x=4H y=2H	13.9	14.7	14.9	15.7	17.0	13.8	14.6	14.8	15.6	16.9
x=4H y=3H	17.1	17.8	18.2	18.9	20.2	17.0	17.7	18.1	18.8	20.1
x=4H y=4H	18.9	19.5	19.9	20.5	22.0	18.8	19.4	19.8	20.5	21.9
x=4H y=6H	20.6	21.2	21.7	22.2	23.7	20.6	21.1	21.6	22.2	23.6
x=4H y=8H	21.5	22.0	22.6	23.1	24.5	21.5	22.0	22.5	23.1	24.5
x=4H y=12H	22.4	22.8	23.4	23.9	25.4	22.4	22.8	23.4	23.9	25.4
x=8H y=4H	19.5	20.0	20.5	21.0	22.5	19.4	19.9	20.5	21.0	22.4
x=8H y=6H	21.4	21.8	22.5	22.9	24.4	21.3	21.8	22.4	22.9	24.3
x=8H y=8H	22.4	22.8	23.5	23.9	25.4	22.4	22.8	23.4	23.8	25.3
x=8H y=12H	23.5	23.8	24.6	24.9	26.4	23.4	23.8	24.5	24.9	26.3
x=12H y=4H	19.6	20.0	20.6	21.1	22.6	19.5	20.0	20.6	21.1	22.5
x=12H y=6H	21.6	22.0	22.7	23.1	24.6	21.6	21.9	22.6	23.0	24.5
x=12H y=8H	22.7	23.1	23.8	24.2	25.6	22.6	23.0	23.7	24.1	25.6

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal


Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

123mm x 123mm



C Halfplanes


180.0 0.0
270.0 90.0

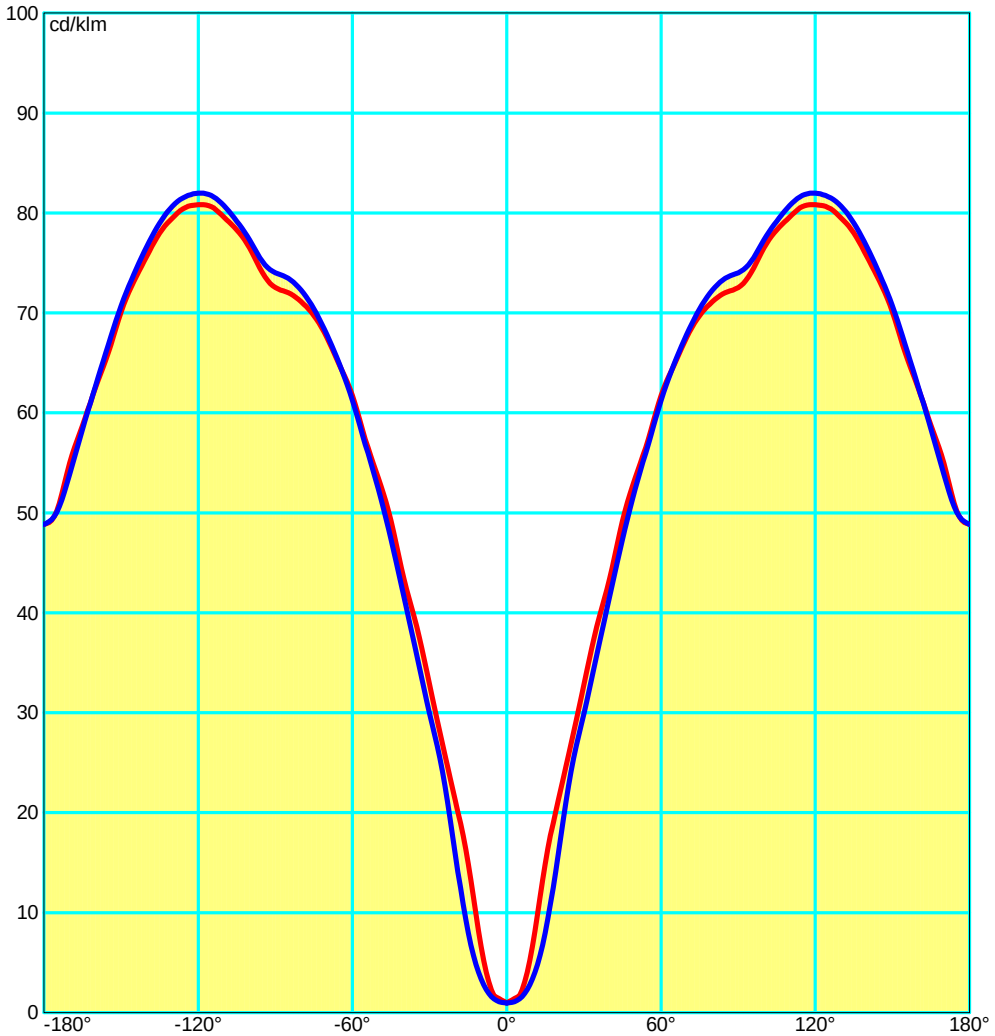

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Luminance

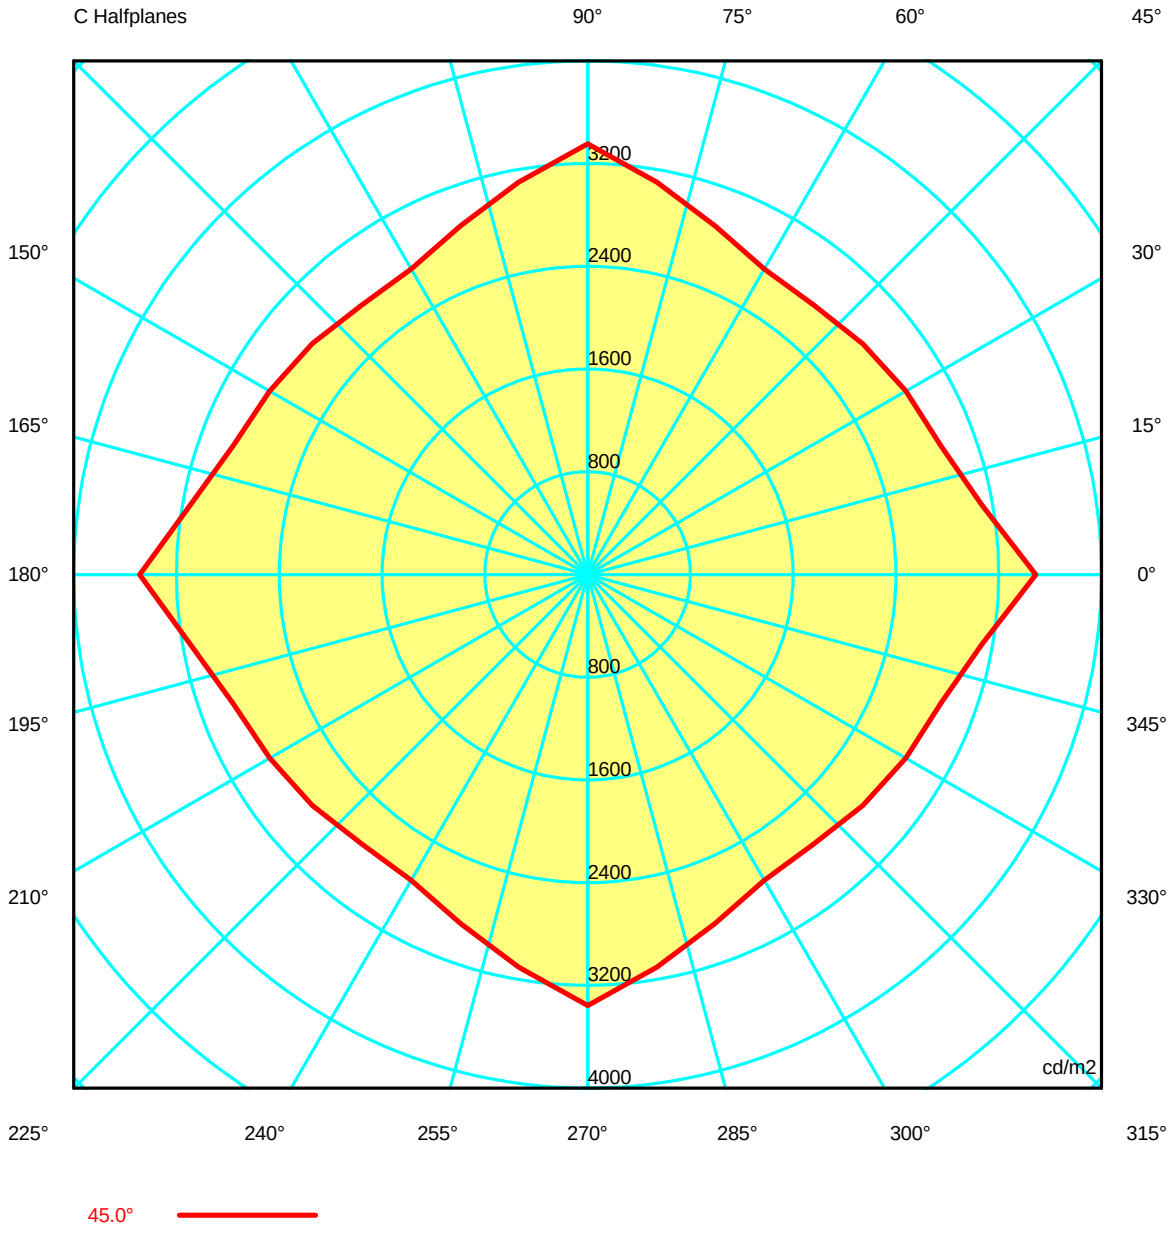

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35
G 5.0	154.53	177.52	215.84	237.06	194.10	173.02	176.90	194.08	163.42	124.58	163.43	183.38	176.90
G 10.0	565.53	425.28	414.19	497.77	528.86	478.38	420.12	439.80	378.27	287.30	378.21	439.93	420.12
G 15.0	1209.74	917.76	815.27	863.84	887.91	870.35	836.87	800.58	712.63	648.37	712.52	800.83	836.87
G 20.0	1654.86	1351.87	1253.19	1243.95	1234.94	1216.33	1212.59	1215.75	1214.25	1235.47	1214.15	1215.99	1212.59
G 25.0	2023.51	1768.64	1673.29	1651.20	1617.93	1573.63	1562.11	1612.85	1709.14	1816.71	1709.06	1613.01	1562.11
G 30.0	2402.68	2109.53	1992.56	1959.14	1923.81	1883.24	1886.16	1966.02	2073.10	2190.85	2073.02	1966.18	1886.16
G 35.0	2775.81	2450.21	2304.95	2249.73	2209.29	2174.95	2189.77	2286.78	2418.33	2572.24	2418.26	2286.93	2189.77
G 40.0	3087.28	2799.37	2646.03	2586.96	2534.55	2478.77	2474.23	2591.62	2761.83	2959.13	2761.79	2591.70	2474.23
G 45.0	3487.43	3116.54	2926.54	2859.66	2796.71	2739.01	2748.55	2892.20	3104.26	3356.04	3104.21	2892.31	2748.55
G 50.0	3812.84	3434.11	3229.96	3143.24	3070.41	3004.19	3012.52	3181.90	3433.72	3735.56	3433.68	3181.98	3012.52
G 55.0	4142.69	3762.71	3539.78	3424.44	3343.41	3271.77	3277.86	3470.18	3756.07	4105.76	3756.06	3470.21	3277.86
G 60.0	4551.34	4085.97	3822.83	3692.99	3596.72	3521.55	3540.06	3754.54	4090.27	4515.74	4090.25	3754.60	3540.06
G 65.0	4912.97	4438.17	4148.17	3995.99	3883.40	3791.70	3805.80	4052.87	4433.49	4918.91	4433.49	4052.88	3805.80
G 70.0	5322.40	4778.54	4451.67	4268.18	4151.01	4057.25	4074.78	4359.07	4789.37	5343.30	4789.37	4359.07	4074.78
G 75.0	5755.16	5138.27	4765.99	4552.47	4419.48	4323.24	4353.20	4670.33	5160.88	5809.93	5160.89	4670.32	4353.20
G 80.0	6215.64	5543.49	5127.13	4874.10	4720.80	4612.98	4645.14	5000.10	5559.51	6315.55	5559.53	5000.05	4645.14
G 85.0	6743.02	5962.90	5485.76	5198.11	5027.97	4913.45	4955.73	5355.78	5993.76	6876.76	5993.79	5355.72	4955.73
G 90.0	7370.48	6450.49	5895.92	5566.44	5379.89	5257.17	5310.16	5770.71	6496.32	7521.49	6496.36	5770.63	5310.16

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35
G 5.0	162.95	193.83	237.06	217.31	173.77	154.53	173.77	217.31	237.06	193.83	173.02	176.90	194.06
G 10.0	477.68	530.63	497.77	404.30	450.73	565.53	450.73	404.30	497.77	530.63	477.68	420.12	439.93
G 15.0	869.04	891.22	863.84	796.60	966.14	1209.74	966.14	843.84	863.84	891.22	869.04	836.87	800.83
G 20.0	1215.13	1227.32	1243.95	1253.19	1396.89	1654.86	1396.89	1253.19	1243.95	1227.32	1215.13	1212.59	1215.99
G 25.0	1572.82	1619.97	1651.20	1673.29	1799.15	2023.51	1799.15	1673.29	1651.20	1619.97	1572.82	1562.11	1613.01
G 30.0	1882.42	1925.88	1959.14	1992.56	2140.84	2402.68	2140.84	1992.56	1959.14	1925.88	1882.42	1886.16	1966.18
G 35.0	2174.17	2211.27	2249.73	2304.95	2480.31	2775.81	2480.31	2304.95	2249.73	2211.27	2174.17	2189.77	2286.93
G 40.0	2478.36	2535.59	2586.96	2639.99	2815.41	3087.28	2815.41	2639.99	2586.96	2535.59	2478.36	2474.23	2591.70
G 45.0	2738.42	2798.18	2859.66	2936.95	3139.44	3487.43	3139.44	2936.95	2859.66	2798.18	2738.42	2748.55	2892.31
G 50.0	3003.79	3071.42	3143.24	3224.09	3449.85	3812.84	3449.85	3224.09	3143.24	3071.42	3003.79	3012.52	3181.98
G 55.0	3271.61	3343.81	3424.44	3537.42	3769.04	4142.69	3769.04	3537.42	3424.44	3343.81	3271.61	3277.86	3470.21
G 60.0	3521.28	3597.41	3692.99	3818.81	4096.86	4551.34	4096.86	3818.81	3692.99	3597.41	3521.28	3540.06	3754.60
G 65.0	3791.64	3883.56	3995.99	4147.24	4438.17	4912.97	4431.97	4147.24	3995.99	3883.56	3791.64	3805.80	4052.88
G 70.0	4057.26	4150.99	4268.18	4451.82	4778.13	5322.40	4778.13	4451.82	4268.18	4150.99	4057.26	4074.78	4359.07
G 75.0	4323.30	4419.31	4552.47	4766.99	5135.51	5755.16	5135.51	4766.99	4552.47	4419.31	4323.30	4353.20	4670.32
G 80.0	4613.24	4720.14	4874.10	5131.12	5532.48	6215.64	5532.48	5131.12	4874.10	4720.14	4613.24	4645.14	5000.05
G 85.0	4913.76	5027.17	5198.11	5490.54	5949.63	6743.02	5949.63	5490.54	5198.11	5027.17	4913.76	4955.73	5355.72
G 90.0	5257.54	5378.98	5566.44	5901.46	6435.01	7370.48	6435.01	5901.46	5566.44	5378.98	5257.54	5310.16	5770.63

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Luminance cd/m2 **Table 3/3**


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35	95.35
G 5.0	163.43	124.58	163.42	183.38	176.90	162.84	194.10	237.06	215.84	177.52
G 10.0	378.21	287.30	378.27	439.80	420.12	478.38	528.86	497.77	414.19	425.28
G 15.0	712.52	648.37	712.63	800.58	836.87	870.35	887.91	863.84	815.27	917.76
G 20.0	1214.15	1235.47	1214.25	1215.75	1212.59	1216.33	1234.94	1243.95	1253.19	1351.87
G 25.0	1709.06	1816.71	1709.14	1612.85	1562.11	1573.63	1617.93	1651.20	1673.29	1768.64
G 30.0	2073.02	2190.85	2073.10	1966.02	1886.16	1883.24	1923.81	1959.14	1992.56	2109.53
G 35.0	2418.26	2572.24	2418.33	2286.78	2189.77	2174.95	2209.29	2249.73	2304.95	2450.21
G 40.0	2761.79	2959.13	2761.83	2591.62	2474.23	2478.77	2534.55	2586.96	2646.03	2799.37
G 45.0	3104.21	3356.04	3104.26	2892.20	2748.55	2739.01	2796.71	2859.66	2926.54	3116.54
G 50.0	3433.68	3735.56	3433.72	3181.90	3012.52	3004.19	3070.41	3143.24	3229.96	3434.11
G 55.0	3756.06	4105.76	3756.07	3470.18	3277.86	3271.77	3343.41	3424.44	3539.78	3762.71
G 60.0	4090.25	4515.74	4090.27	3754.54	3540.06	3521.55	3596.72	3692.99	3822.83	4085.97
G 65.0	4433.49	4918.91	4433.49	4052.87	3805.80	3791.70	3883.40	3995.99	4148.17	4438.17
G 70.0	4789.37	5343.30	4789.37	4359.07	4074.78	4057.25	4151.01	4268.18	4451.67	4778.54
G 75.0	5160.89	5809.93	5160.88	4670.33	4353.20	4323.24	4419.48	4552.47	4765.99	5138.27
G 80.0	5559.53	6315.55	5559.51	5000.10	4645.14	4612.98	4720.80	4874.10	5127.13	5543.49
G 85.0	5993.79	6876.76	5993.76	5355.78	4955.73	4913.45	5027.97	5198.11	5485.76	5962.90
G 90.0	6496.36	7521.49	6496.32	5770.71	5310.16	5257.17	5379.89	5566.44	5895.92	6450.49

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area Tilting Angle:0°

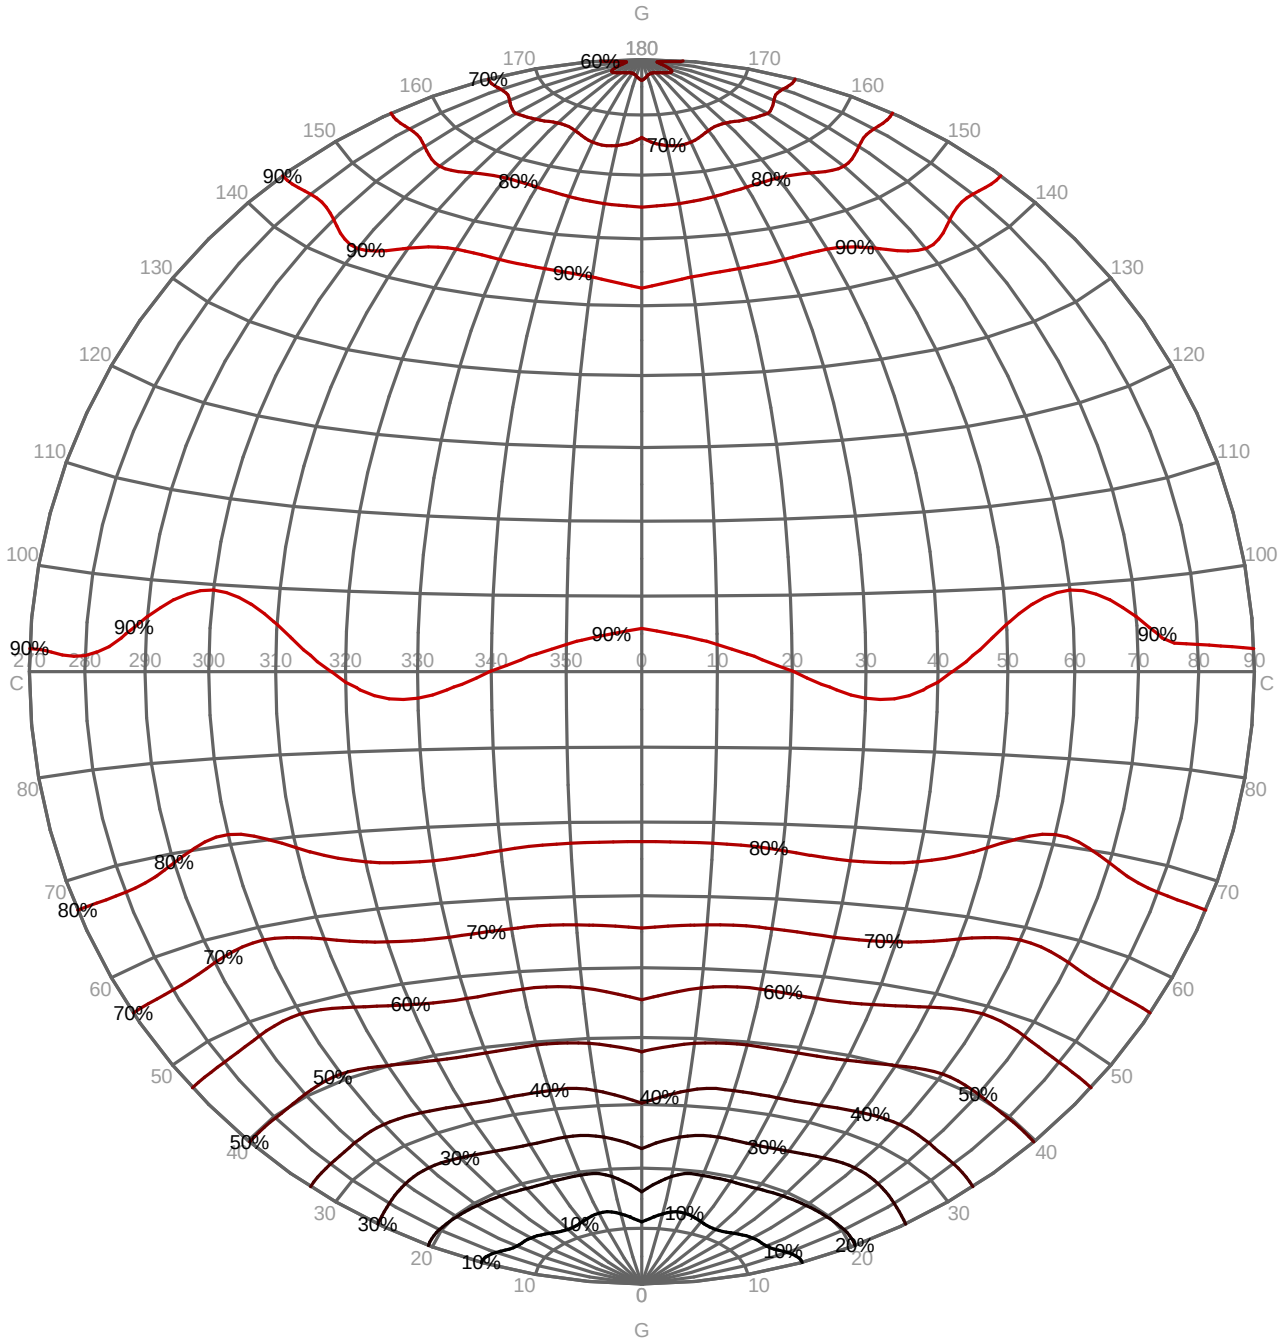


Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal

Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

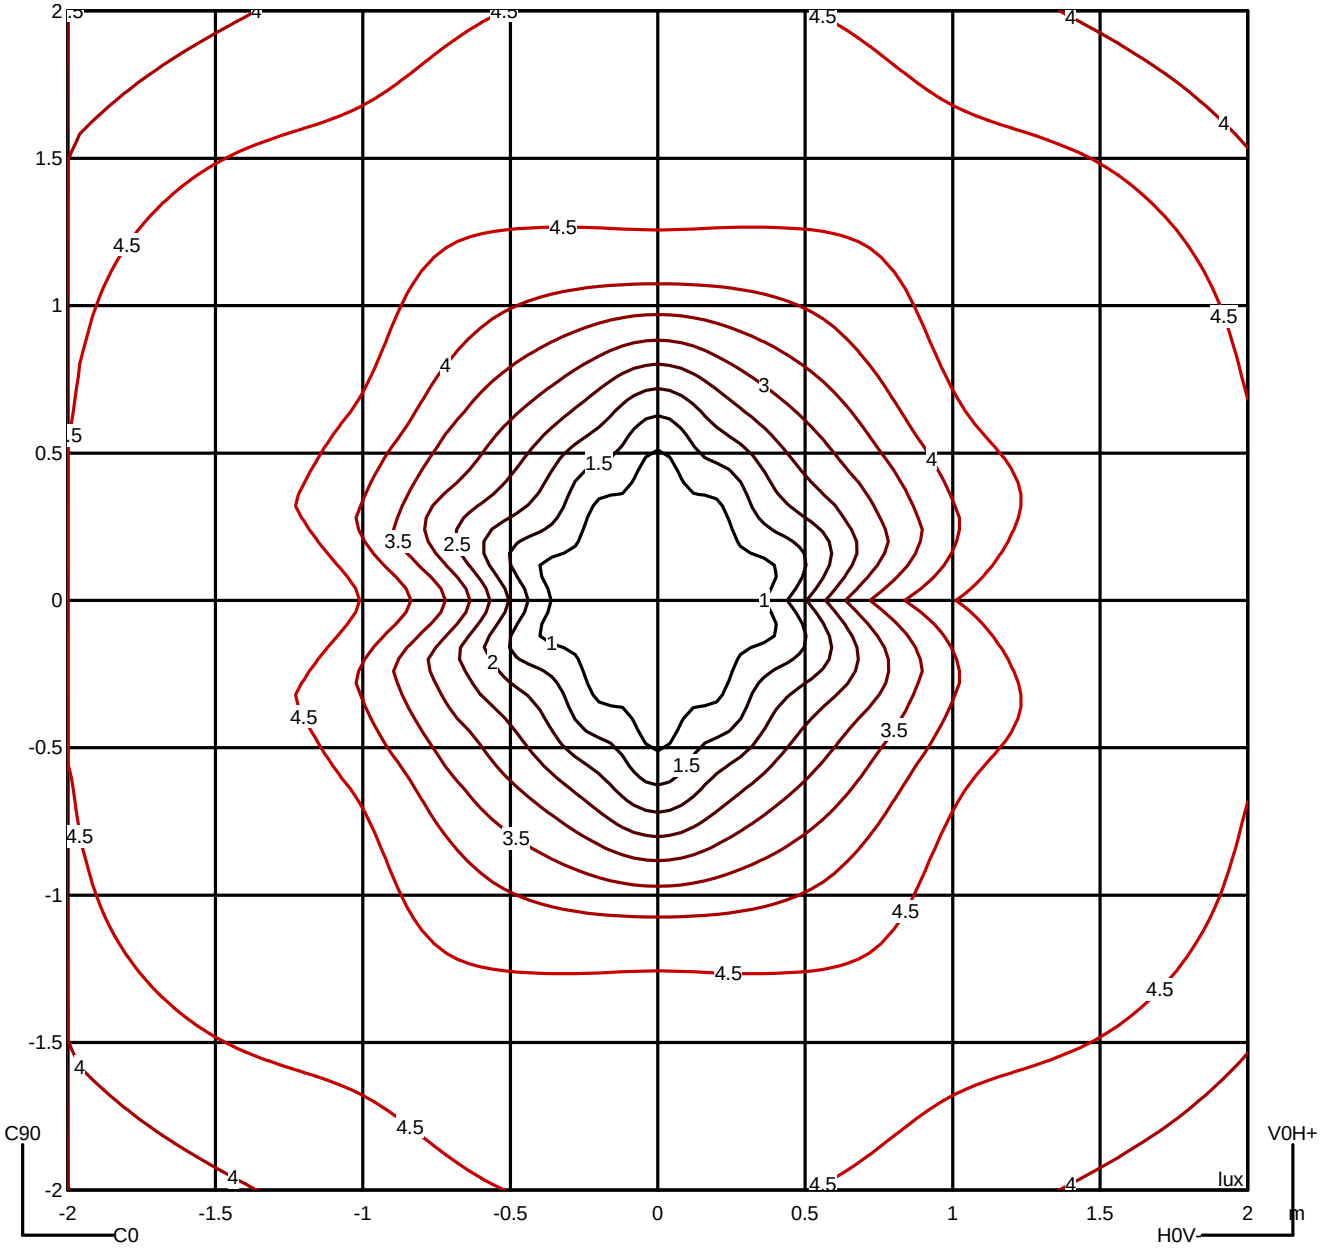

Luminaire
Code PX-0087-ANT
Name Baliza 25W fluor E27 dif. opal
Measurem.
Code 55-9605
Name Baliza 25W fluor E27 dif. opal


Luminaire Flux	1229.92 lm	Luminaire Power	23.00 W	Efficacy	53.47 lm/W	Efficiency	81.99%
Lamps Flux	1500.00 lm	Maximum value	82.64 cd/klm	Position	C=30.00 G=120.00	CG	Asymmetrical


Average Luminance [cd/m²]

	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	3487	3813	4143	4551	4913	5322	5755	6216	6743	---
90.0°	3356	3736	4106	4516	4919	5343	5810	6316	6877	---

Flush mounted or transveral view


		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

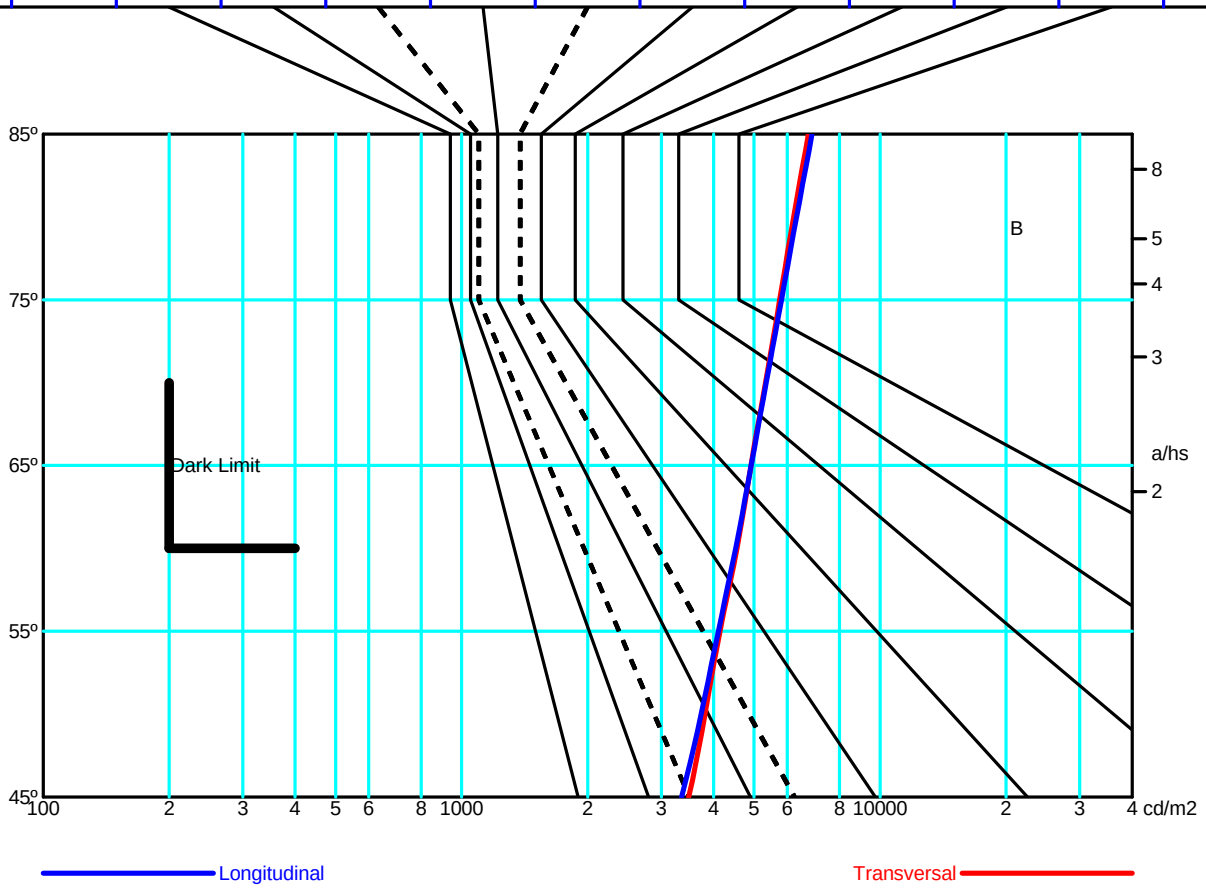

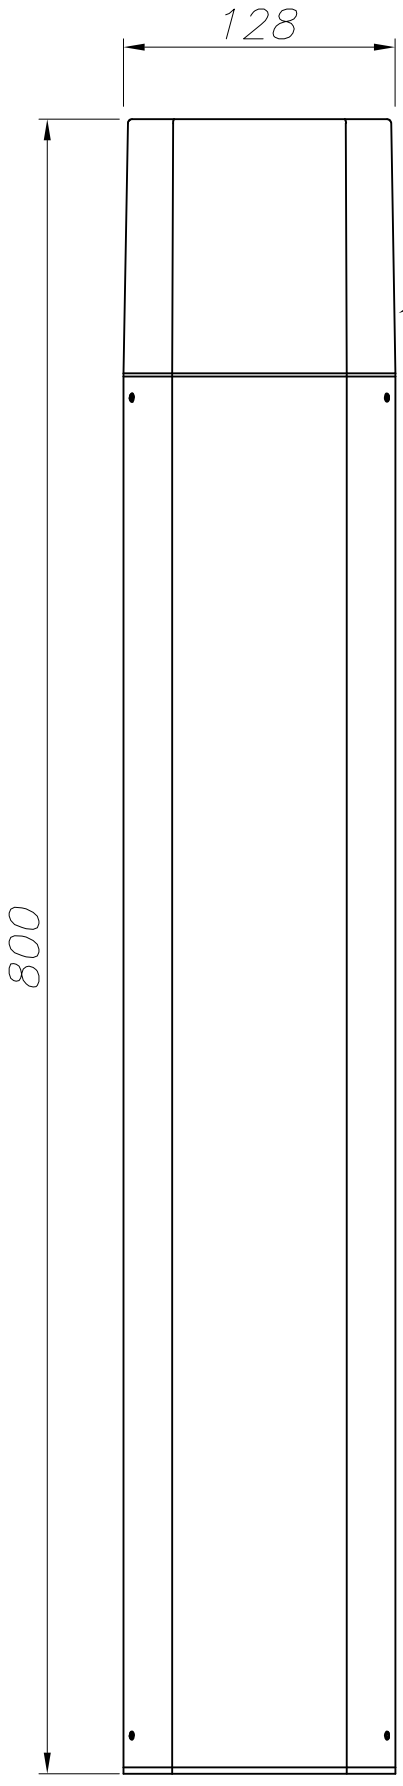

POLICARBONATO OPAL
OPAL POLYCARBONATE

ALUMINIO EXTRUSIONADO
EXTRUDED ALUMINIUM

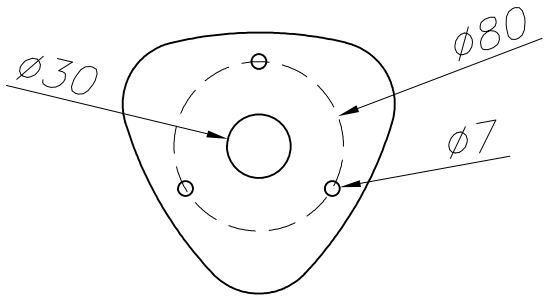



PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

Mandela


PX-0086 PX-0087

FOR LIGHT







1

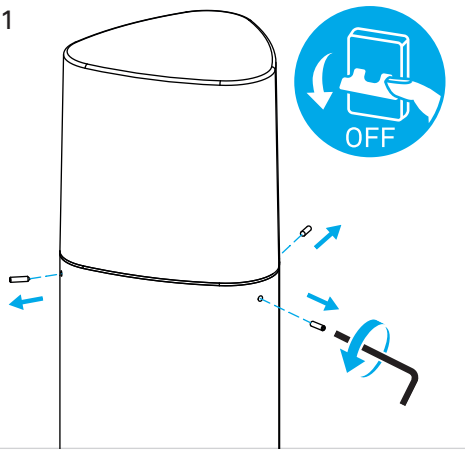


2

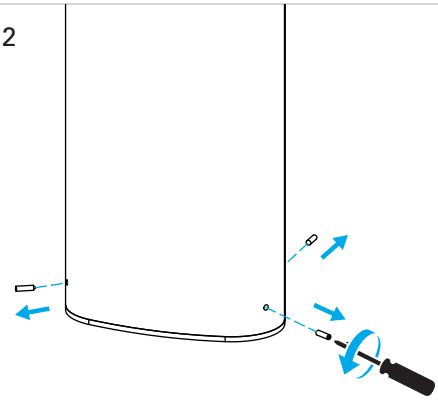


3

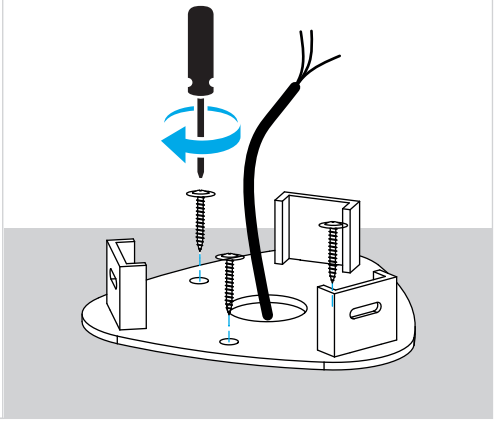


4

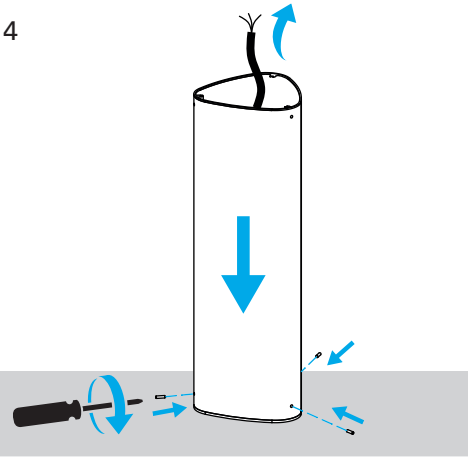


5

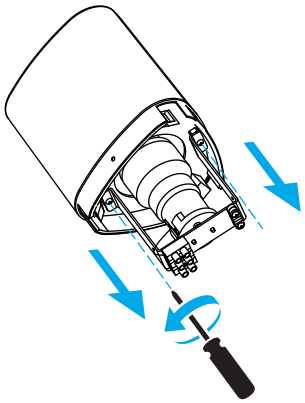


6

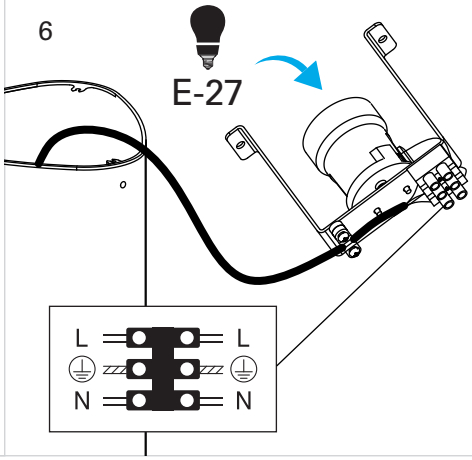


7

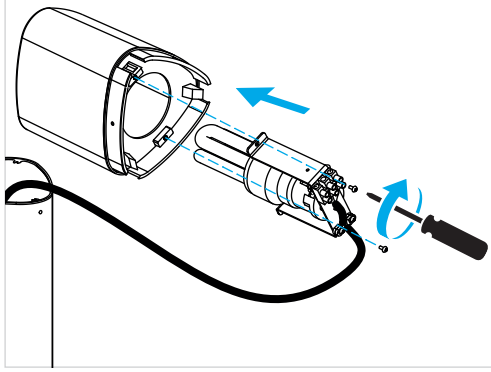

8

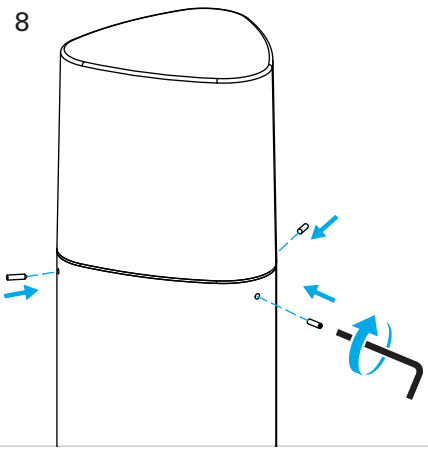

9

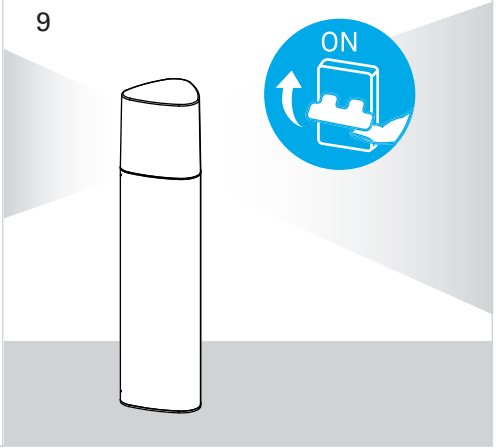

09-12-2021