


PX-0244-OXI

Suspension IP23 ADUR E27 15W Marron rouille 964lm

CARACTÉRISTIQUES TECHNIQUES

IP23 IK05



Puissance totale du luminaire : 15W

Lumens réels : 964

Lm/W réels : 64

Matière de la structure : Aluminium

Finition structure : Marron rouille

Matière du diffuseur : Verre

Finition diffuseur : Transparent

Dimension maxi. de l'ampoule : 167/51 mm

Ampoule recommandée : E27


Tension/Fréquence : 100-240V ~ 50/60Hz

Garantie : 3 Ans

Luminaire facilement recyclable

CARACTÉRISTIQUES LUMINOTECHNIQUES

Douille	Quantité	Puissance source lumineuse (W)	Température de couleur corrélée (CCT)
E27	1	Puissance maxi. 15W	-



LOGISTIQUE

Poids net (kg): 2.3


Poids emballé (kg): 2.63

Emballage: 250mm x 250mm x 330mm



4 Un

Ø230

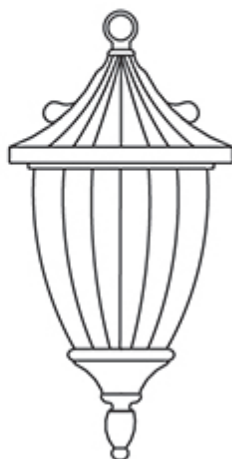

460

Luminaire


Code PX-0244-OXI
Name Sobremuro ADUR 100W E27

Measurem.

Code PX-0244-OXI
Name Sobremuro ADUR 100W E27

Luminaire Flux	963.60 lm	Luminaire Power	100.00 W	Efficacy	9.64 lm/W	Efficiency	71.91%
Lamps Flux	1340.00 lm	Maximum value	99.74 cd/klm	Position	C=60.00 G=40.00	CG	Double Symmetrical
Round Luminaire	Diam.	230 mm	Height	460 mm			
Round Luminous Area	Diam.	230 mm	Height	180 mm			
Horizontal Luminous Area	0.041548 m2		Emitting area on Plane 180°		0.041400 m2		
Emitting area on Plane 0°	0.041400 m2		Emitting area on Plane 270°		0.041400 m2		
Emitting area on Plane 90°	0.041400 m2		Glare area at 76°		0.050222 m2		
Coordinate system	CG		Symmetry Type		Double Symmetrical		
Date	26-01-2017		Maximum Gamma Angle		180		
Measurement Distance	0.00		Measurement Flux		1340.00 lm		
Operator	Asselum T2		Source Voltage [V]				
Temperature	25.00 °C		Source current [A]				
Humidity	60.00 %		Photocell				
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	STANDAR GOC 100W O	STANDAR GOC 100W O	1340.00	100.00	1	
C.I.E.	17 47 74 59 72	D DIN 5040	C11			
F UTE	0.43 J + 0.29 T	B NBN	BZ 10 / 0.8 / BZ 9			

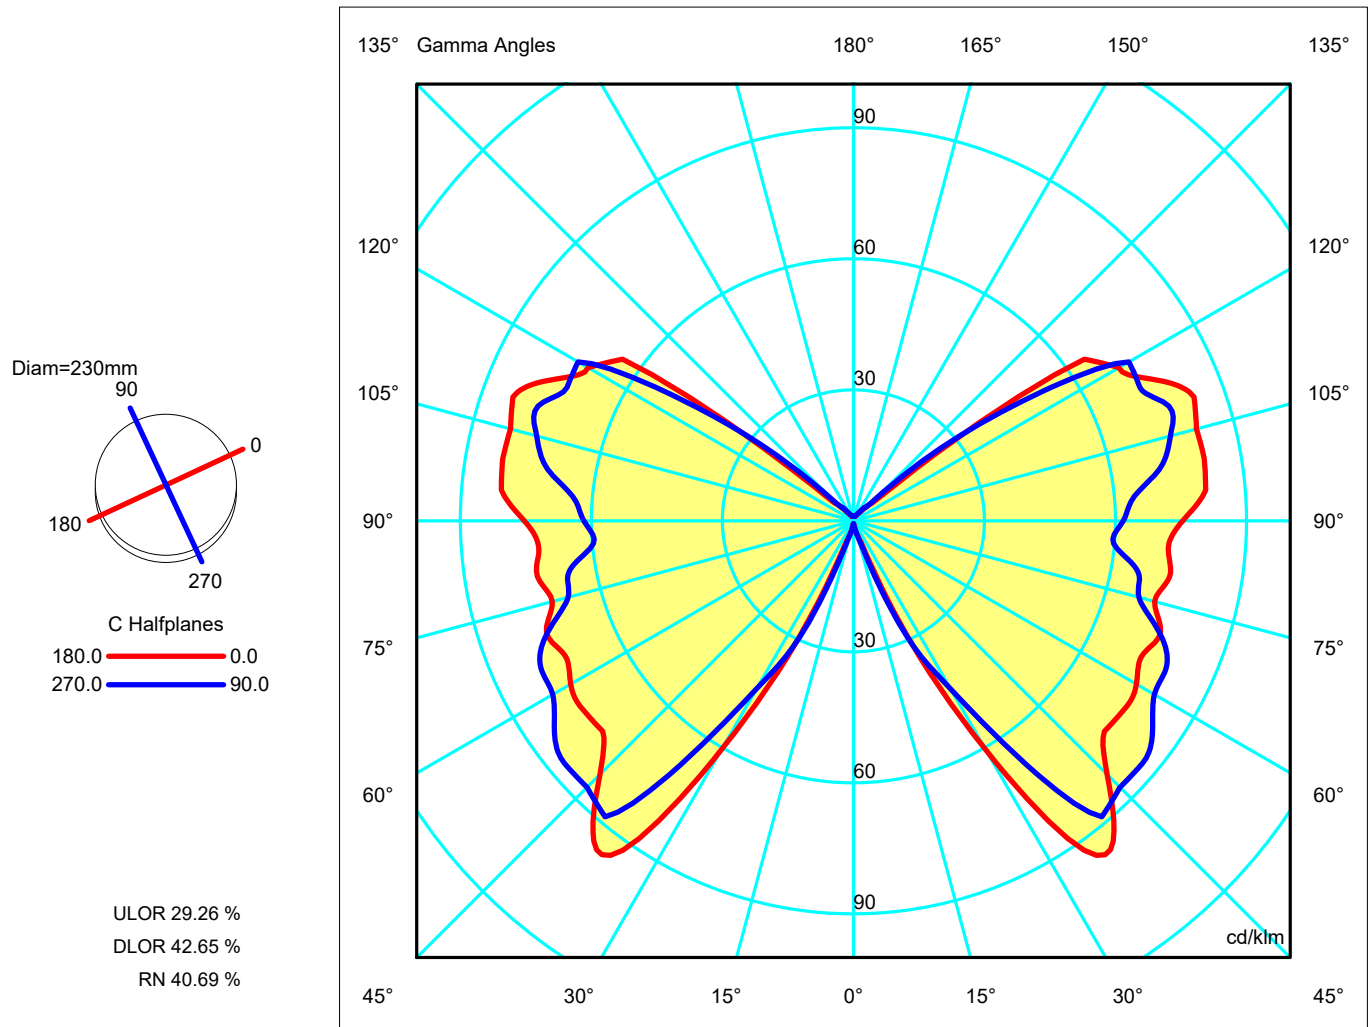

Luminaire

Code PX-0244-OXI
Name Sobremuro ADUR 100W E27


Measurem.

Code PX-0244-OXI
Name Sobremuro ADUR 100W E27


Luminaire Flux	963.60 lm	Luminaire Power	100.00 W	Efficacy	9.64 lm/W	Efficiency	71.91%
Lamps Flux	1340.00 lm	Maximum value	99.74 cd/klm	Position	C=60.00 G=40.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1


	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	0.63	0.63	0.63	0.63	0.63	0.63	0.63
G 5.0	0.90	0.83	0.97	0.83	0.99	0.83	0.92
G 10.0	1.82	1.88	1.93	1.96	1.97	1.94	1.91
G 15.0	3.21	3.39	3.54	3.55	3.60	3.59	3.59
G 20.0	5.64	8.15	6.28	8.95	7.96	8.63	10.00
G 25.0	28.98	36.17	30.70	35.24	34.19	29.36	29.84
G 30.0	60.61	55.26	51.92	51.43	54.89	43.53	44.37
G 35.0	92.05	77.09	82.41	73.24	82.64	61.06	66.56
G 40.0	92.79	91.00	89.69	90.11	99.74	84.01	88.45
G 45.0	82.13	79.82	78.83	88.95	89.44	89.71	86.26
G 50.0	74.96	73.88	78.37	81.40	84.24	81.63	86.37
G 55.0	75.49	75.05	77.81	78.93	82.00	81.87	83.60
G 60.0	74.78	74.83	76.88	76.77	79.09	79.26	79.51
G 65.0	72.90	76.03	78.15	76.78	78.54	78.09	79.04
G 70.0	74.80	75.11	77.59	75.55	73.29	73.27	74.50
G 75.0	71.38	73.25	73.68	69.61	68.87	66.11	67.64
G 80.0	73.48	73.66	74.82	68.05	67.25	67.14	66.03
G 85.0	72.33	70.02	74.53	68.09	64.09	65.07	59.77
G 90.0	75.35	73.28	76.16	70.07	65.59	65.69	61.76
G 95.0	80.93	77.53	78.36	74.82	70.23	68.21	64.55
G100.0	81.55	78.36	81.48	75.01	69.43	69.85	71.49
G105.0	81.29	78.52	86.84	79.31	71.68	70.83	75.10
G110.0	82.96	82.77	85.47	78.91	72.58	72.96	76.85
G115.0	76.42	76.95	81.20	73.69	70.13	67.67	72.35
G120.0	70.13	72.06	78.43	67.70	68.54	67.36	72.82
G125.0	64.53	67.68	63.83	57.73	50.15	53.62	49.21
G130.0	17.87	17.38	22.91	17.70	26.32	20.80	25.19
G135.0	5.45	5.51	5.82	5.91	6.26	6.44	7.19
G140.0	3.56	3.69	3.78	3.86	4.03	3.87	4.09
G145.0	2.26	2.38	2.45	2.47	2.56	2.53	2.68
G150.0	1.73	1.79	1.83	1.83	1.90	1.86	1.93
G155.0	1.34	1.38	1.40	1.42	1.45	1.47	1.48
G160.0	1.11	1.14	1.13	1.15	1.17	1.15	1.19
G165.0	1.09	1.10	1.11	1.11	1.13	1.09	1.11
G170.0	1.09	1.11	1.13	1.12	1.13	1.11	1.13
G175.0	1.11	1.13	1.15	1.14	1.15	1.12	1.13
G180.0	1.13	1.13	1.13	1.13	1.13	1.13	1.13

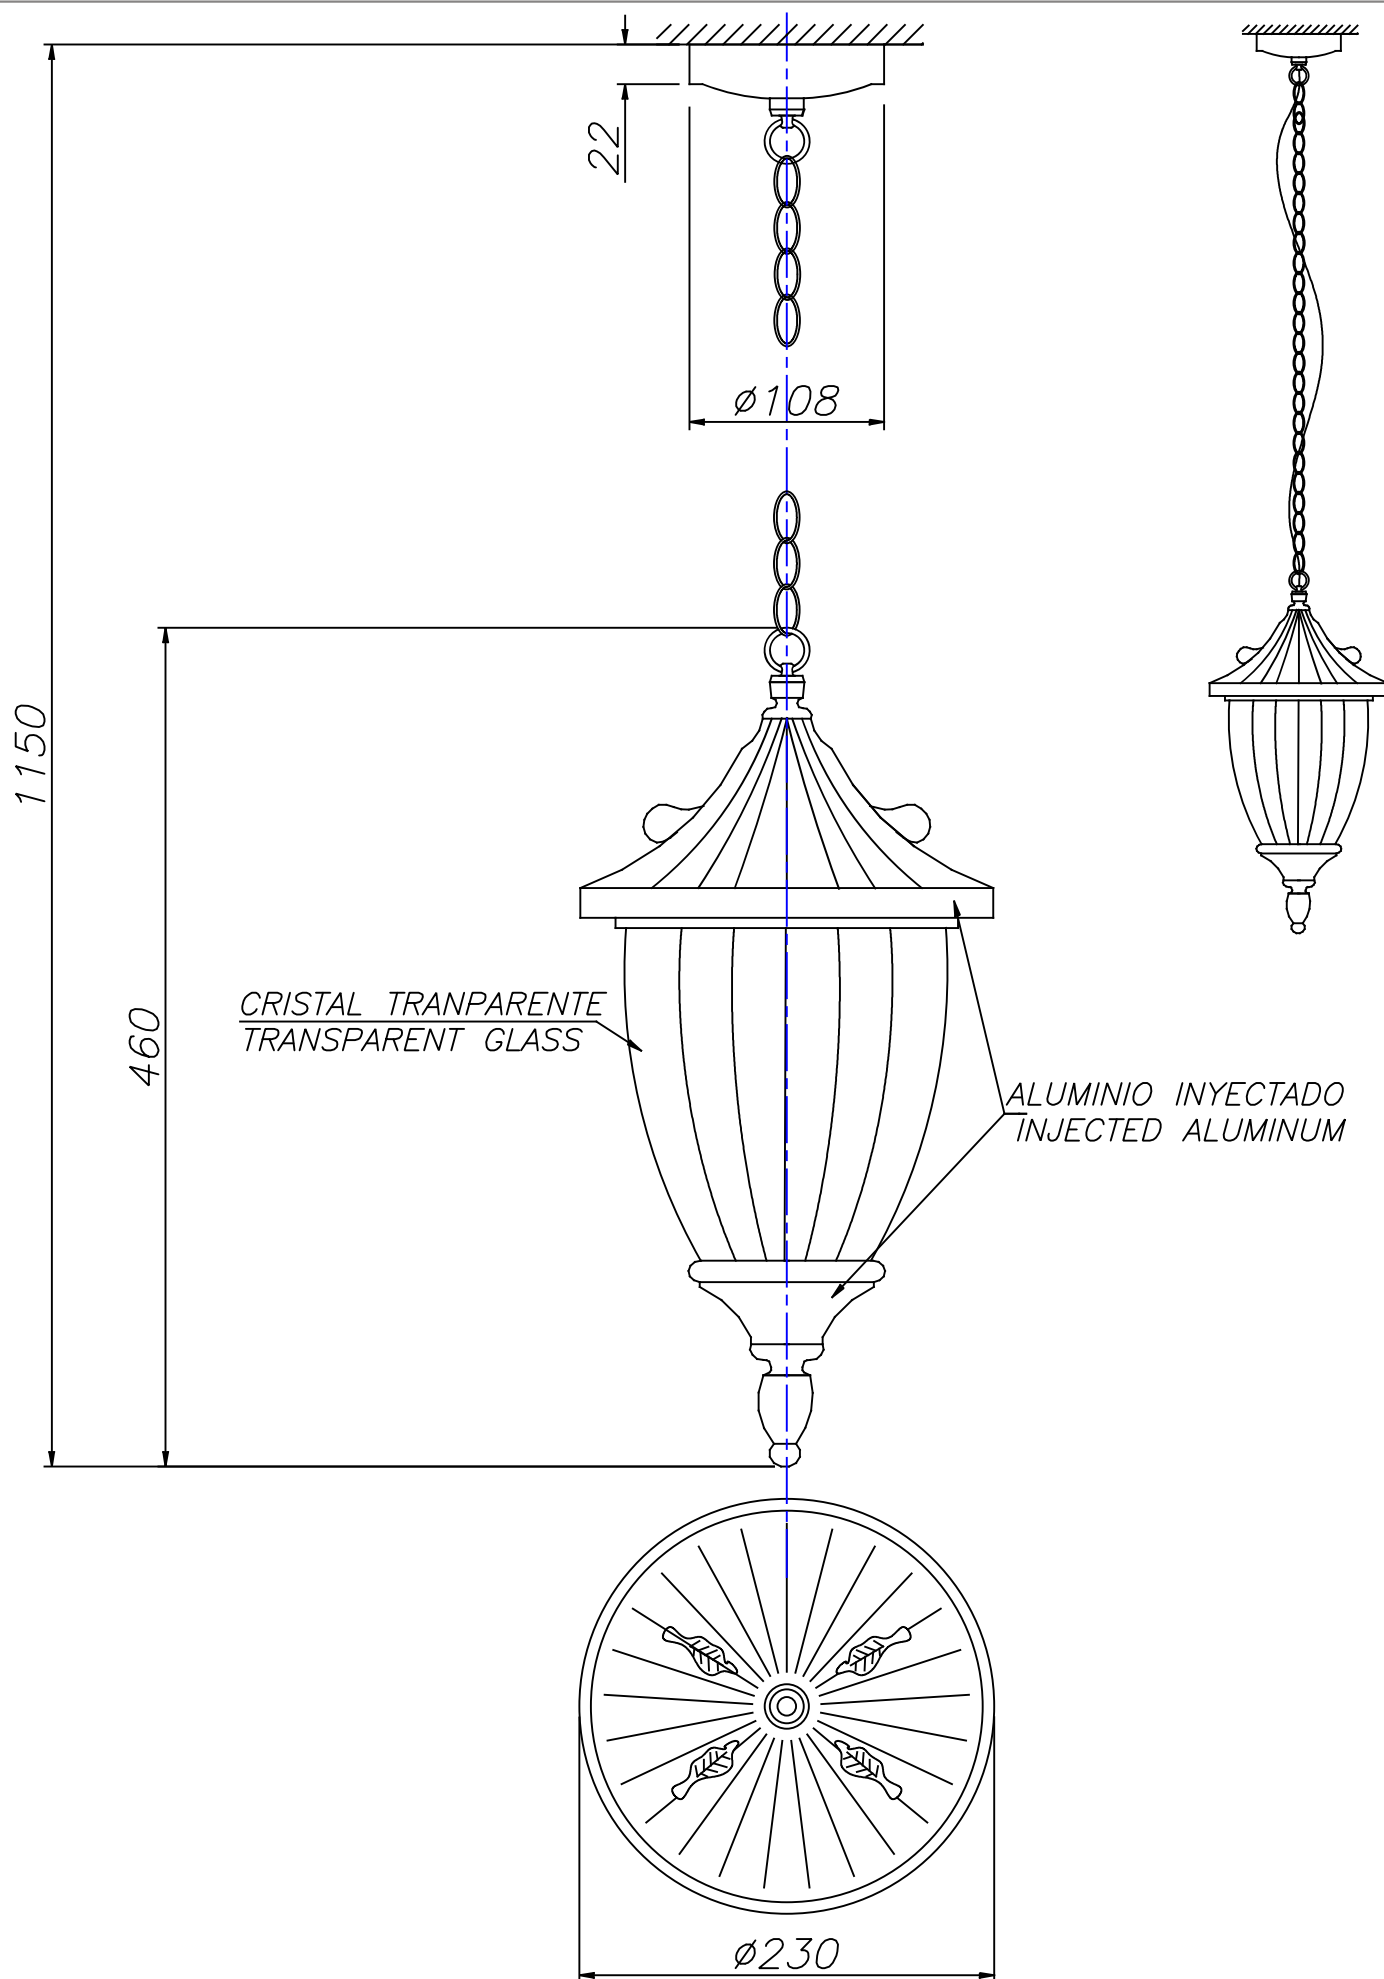


①

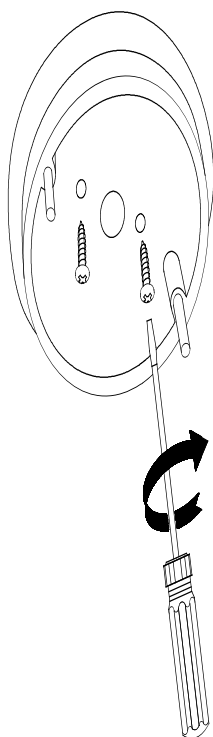

②

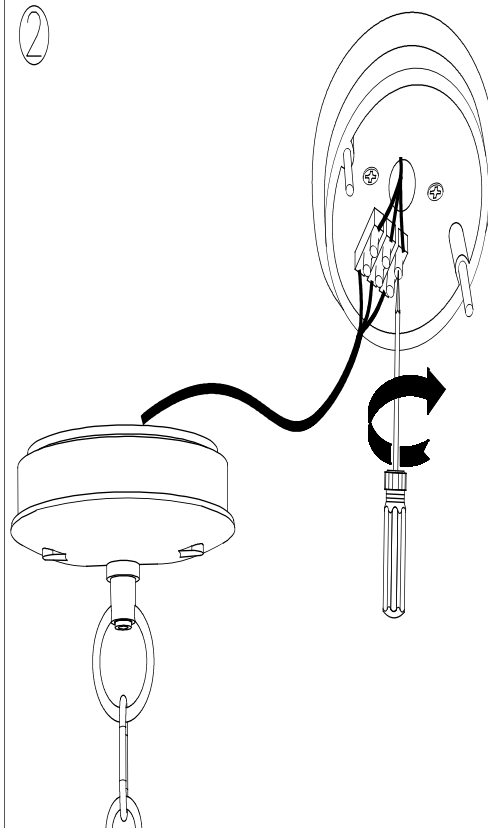

③

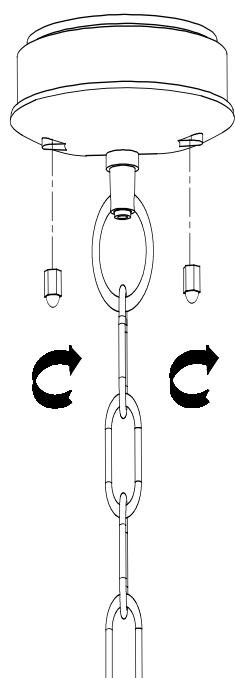

④

